



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# MMBD1501(A) THRU MMBD1505(A)

## Features

- Low Leakage
- Surface Mount Package Ideally Suited for Automatic Insertion
- 150°C Junction Temperature
- High Conductance

## Mechanical Data

- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Polarity: See Diagram
- Weight: 0.008 grams ( approx.)

## Maximum Ratings @ 25°C Unless Otherwise Specified

Characteristic	Symbol	Value	Unit
Working Inverse Voltage	$V_{IV}$	180	V
DC Forward Current	$I_F$	600	mA
Average Rectified Current	$I_o$	200	mA
Recurrent Peak Forward Current	$i_f$	700	mA
Peak Forward Surge Current @ $t=1.0s$ @ $t=1.0ms$	$i_{f(surge)}$	1.0 2.0	A
Power Dissipation	$P_d$	350	mW
Thermal Resistance	R	357	°C/W
Operation & Storage Temp. Range	$T_j, T_{STG}$	-55 to +150	°C

**Note:** 1) These ratings are based on a max. junction temperature of 150 degrees C  
 2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operation

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Charateristic	Symbol	Min	Max	Unit	Test Cond.
Breakdown Voltage	$B_v$	200		V	$I_R=5.0\mu A$
Forward Voltage Drop	$V_F$	620	750	mV	$I_F=1.0mA$
		720	850	mV	$I_F=10mA$
		800	950	mV	$I_F=50mA$
		0.83	1.1	V	$I_F=100mA$
		0.87	1.3	V	$I_F=200mA$
		0.9	1.5	V	$I_F=300mA$
Reverse Current	$I_R$	-----	10 5.0	nA uA	$V_R=180V$ $V_R=180V T_A=150^\circ C$
Junction Capacitance	$C_j$	-----	4	pF	$V_R=0V, f=1.0MHz$

## High Conductance Low Leakage Diode 350mW


### SOT-23

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	


### Suggested Solder Pad Layout

# MMBD1501(A) thru MMBD1505(A)


**REVERSE VOLTAGE vs REVERSE CURRENT**  
BV - 3.0 to 100  $\mu$ A

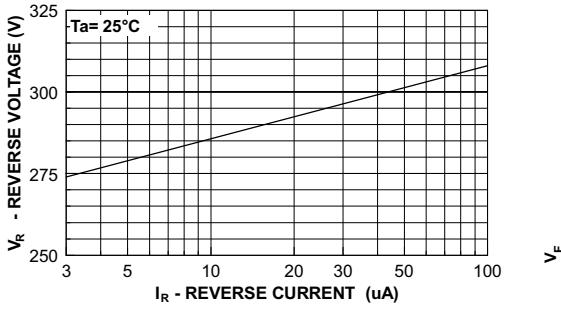


**Reverse Current Vs Reverse Voltage**  
 $I_R$  - 130 - 205 volts

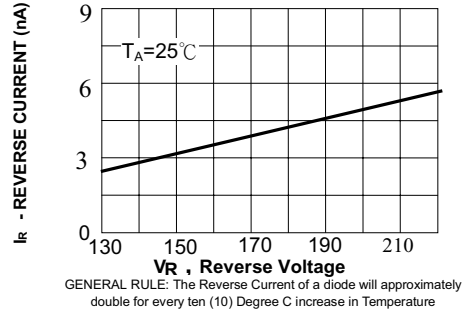


**FORWARD VOLTAGE vs FORWARD CURRENT**  
VF - 10 to 800 mA

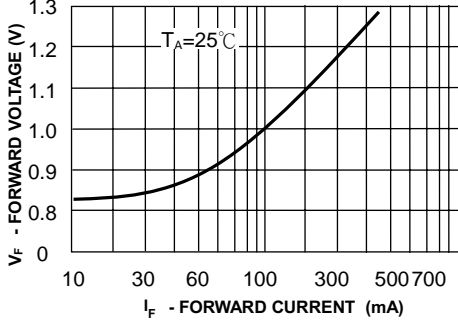

**CAPACITANCE vs REVERSE VOLTAGE**  
VR - 0 to 15 V

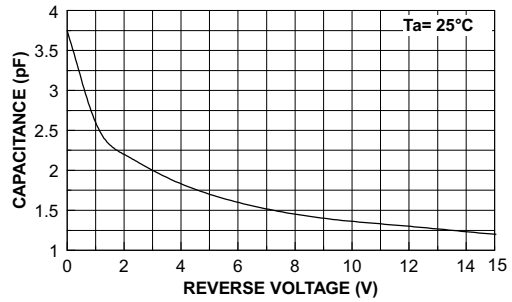


**FORWARD VOLTAGE vs FORWARD CURRENT**  
VF - 0.1 to 10 mA

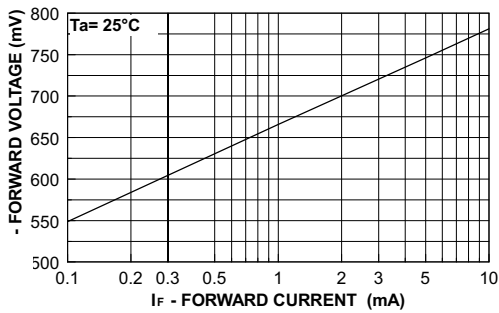

# MMBD1501(A) thru MMBD1505(A)


**M·C·C·**

Micro Commercial Components



## MARKING

MMBD1501(A) 11/A11  
MMBD1503(A) 13/A13  
MMBD1504(A) 14/A14  
MMBD1505(A) 15/A15





Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.