


Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

Features

- Power dissipation: 200mW (T_{amb}=25℃)
- Collector current:150mA




Marking: A2/A3

Maximum Ratings

- Operating Temperature: -55℃ to +150℃
- Storage Temperature: -55℃ to +150℃
- Case Material:Molded Plastic. UL Flammability Classificatio Rating 94-0 and MSL Rating 1

Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	V_{R}	75V	I _R =100 μ A
Peak Forward	I _F	150mA	
Current			
Maximum		0.715V	I _{FM} =1mA;
Instantaneous	V _F	0.855	I _{FM} =10mA;
Forward Voltage		1.0V	I _{FM} =50mA;
		1.25V	I _{FM} =150mA;
Maximum DC			
Reverse Current At	I _R	1.0µA	V _R =75Volts
Rated DC Blocking			
Voltage			
Diode Capacitance	CD	2pF	Measured at 1.0MHz,
			V _R =0V
Reverse Recovery	T _{rr}	4ns	I _F =I _R =10mA
Time			Irr=0.11 _R

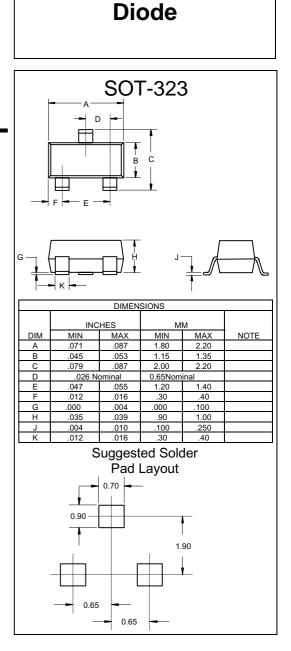

BAS16WT

MMBD4148WT

200mW Switching

www.mccsemi.com



Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.

