

International  
**IR** Rectifier

**MURB820PbF**  
**MUR820-1PbF**

## Ultrafast Rectifier

### Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature
- Lead-Free ("PbF" suffix)

$$t_{rr} = 25\text{ns}$$

$$I_{F(AV)} = 8\text{Amp}$$

$$V_R = 200\text{V}$$

### Description/ Applications

International Rectifier's MUR.. series are the state of the art Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time.

The planar structure and the platinum doped life time control, guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as free-wheeling diode in low voltage inverters and chopper motor drives.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

### Absolute Maximum Ratings

Parameters	Max	Units
$V_{RRM}$ Peak Repetitive Peak Reverse Voltage	200	V
$I_{F(AV)}$ Average Rectified Forward Current Total Device, (Rated $V_R$ ), $T_C = 150^\circ\text{C}$	8	A
$I_{FSM}$ Non Repetitive Peak Surge Current	100	
$I_{FM}$ Peak Repetitive Forward Current (Rated $V_R$ , Square wave, 20 KHz), $T_C = 150^\circ\text{C}$	16	
$T_J, T_{STG}$ Operating Junction and Storage Temperatures	-65 to 175	$^\circ\text{C}$

### Case Styles



**Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

Parameters	Min	Typ	Max	Units	Test Conditions
V <sub>BR</sub> , V <sub>F</sub>	200	-	-	V	I <sub>R</sub> = 100μA
V <sub>F</sub>	-	-	0.975	V	I <sub>F</sub> = 8A
			0.895	V	I <sub>F</sub> = 8A, T <sub>J</sub> = 150°C
I <sub>R</sub>	-	-	5	μA	V <sub>R</sub> = V <sub>R</sub> Rated
			250	μA	T <sub>J</sub> = 150°C, V <sub>R</sub> = V <sub>R</sub> Rated
C <sub>T</sub>	-	25	-	pF	V <sub>R</sub> = 200V
L <sub>S</sub>	-	8.0	-	nH	Measured lead to lead 5mm from package body

**Dynamic Recovery Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

Parameters	Min	Typ	Max	Units	Test Conditions
t <sub>rr</sub>	-	-	35	ns	I <sub>F</sub> = 1.0A, di <sub>F</sub> /dt = 50A/μs, V <sub>R</sub> = 30V
			25		I <sub>F</sub> = 0.5A, I <sub>R</sub> = 1.0A, I <sub>REC</sub> = 0.25A
			20		T <sub>J</sub> = 25°C
			34		T <sub>J</sub> = 125°C
I <sub>RRM</sub>	-	1.7	-	A	T <sub>J</sub> = 25°C
					4.2
Q <sub>rr</sub>	-	23	-	nC	T <sub>J</sub> = 25°C
					75

I<sub>F</sub> = 8A  
V<sub>R</sub> = 160V  
di<sub>F</sub>/dt = 200A/μs

**Thermal - Mechanical Characteristics**

Parameters	Min	Typ	Max	Units
T <sub>J</sub>	- 65	-	175	°C
T <sub>Stg</sub>	- 65	-	175	
R <sub>thJC</sub>	-	-	3.0	°C/ W
R <sub>thJA</sub>	-	-	50	
R <sub>thCS</sub> <sup>①</sup>	-	0.5	-	
Wt	-	2.0	-	g
		0.07		(oz)
Mounting Torque	6.0	-	12	Kg-cm
	5.0	-	10	lbf.in
Device Marking	MURB820		Case style D <sup>2</sup> Pak	
	MURB820-1		Case style TO-262	

① Mounting Surface, Flat, Smooth and Greased

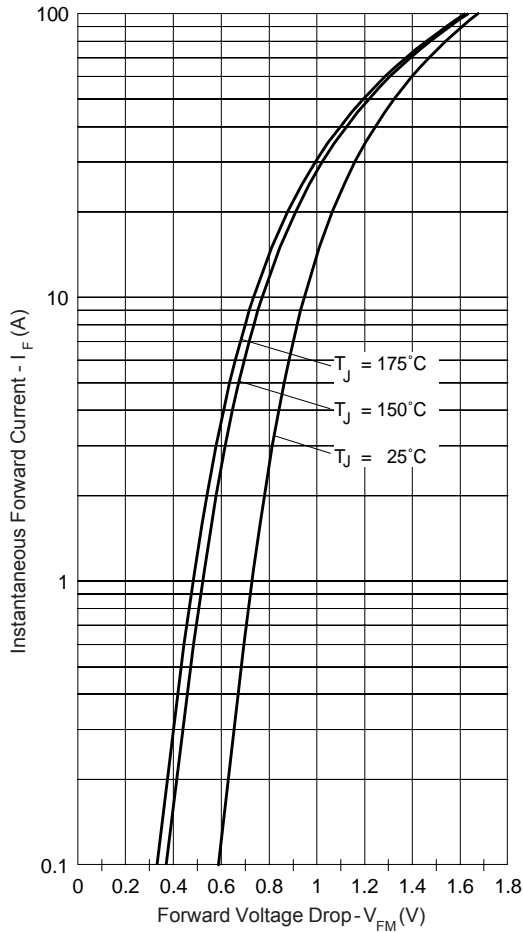


Fig. 1 - Typical Forward Voltage Drop Characteristics

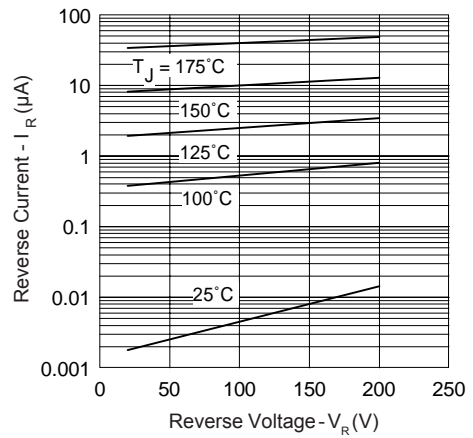


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

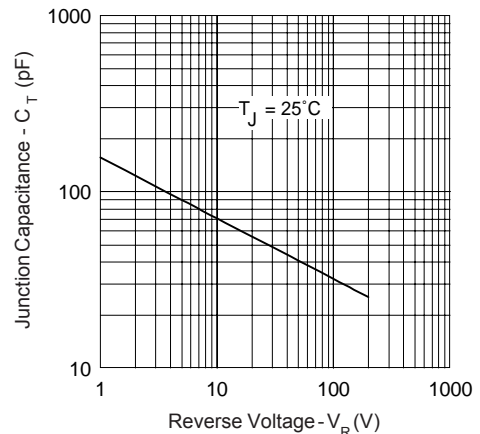


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

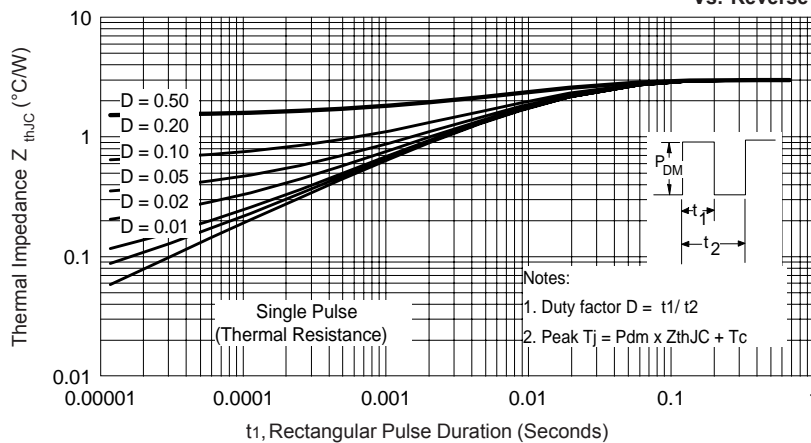


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

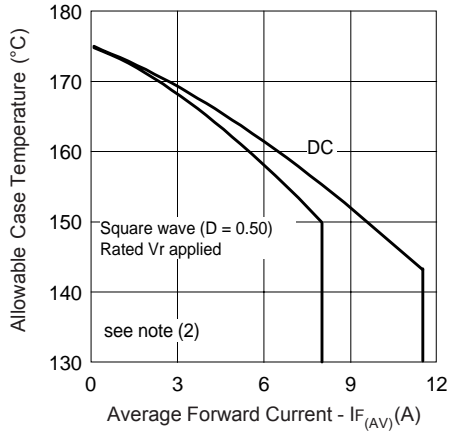


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

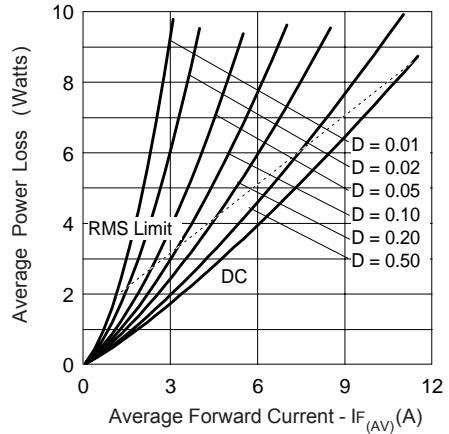


Fig. 6 - Forward Power Loss Characteristics

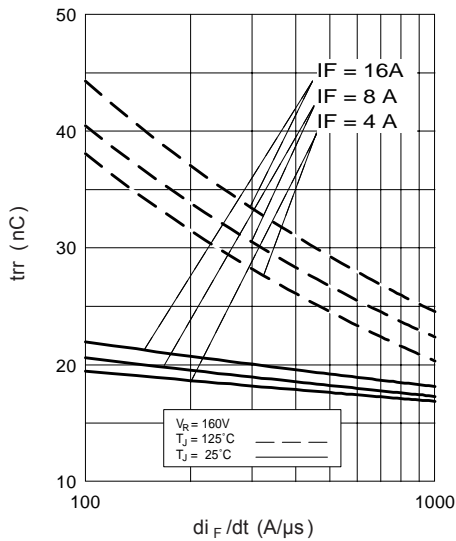


Fig. 7 - Typical Reverse Recovery vs.  $di_F/dt$

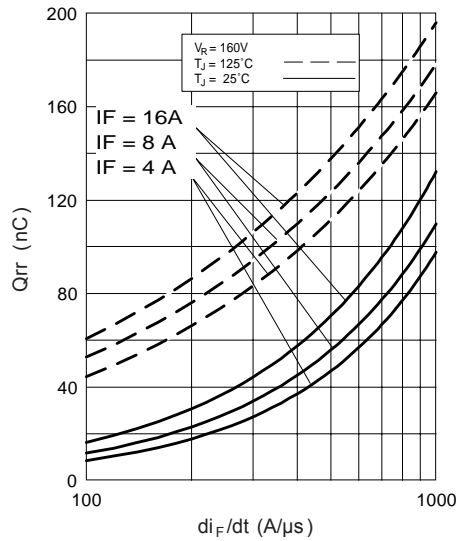


Fig. 8 - Typical Stored Charge vs.  $di_F/dt$

(2) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;

$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1-D)$ ;  $I_R @ V_{R1}$  = rated  $V_R$

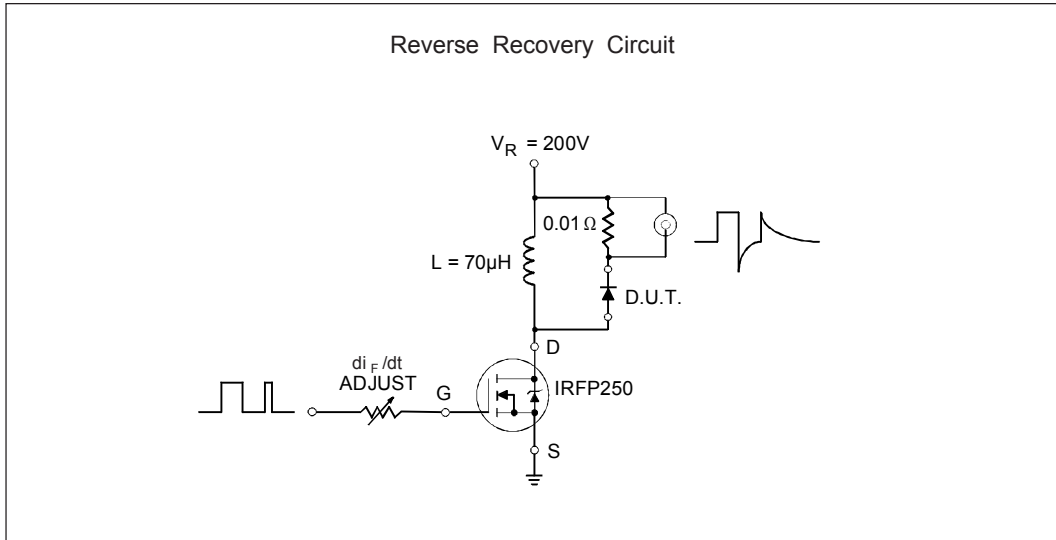


Fig. 9- Reverse Recovery Parameter Test Circuit



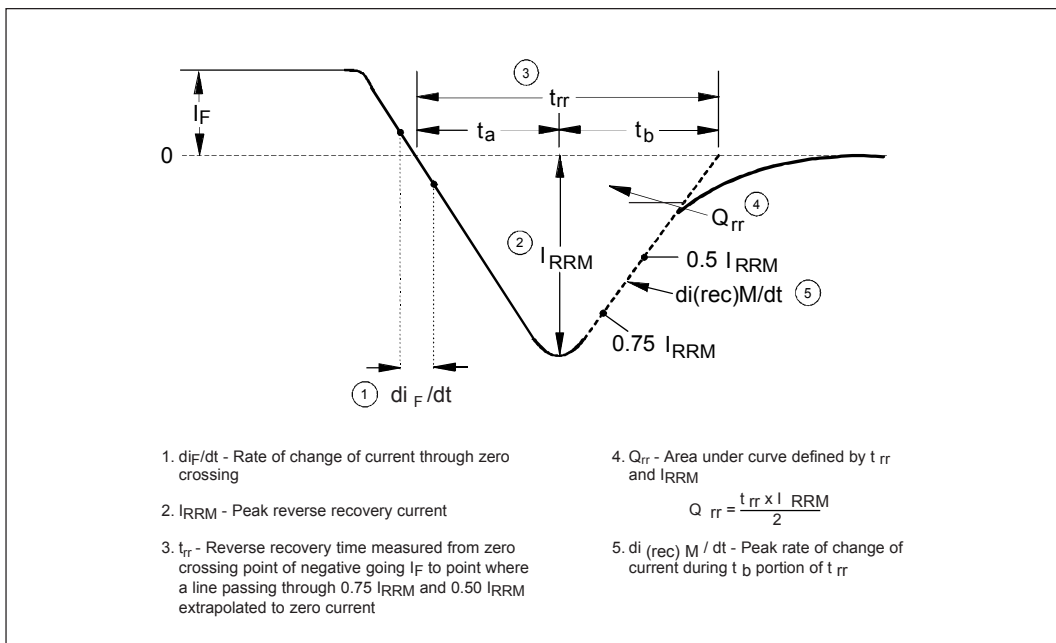


Fig. 10 - Reverse Recovery Waveform and Definitions

Outlines Table

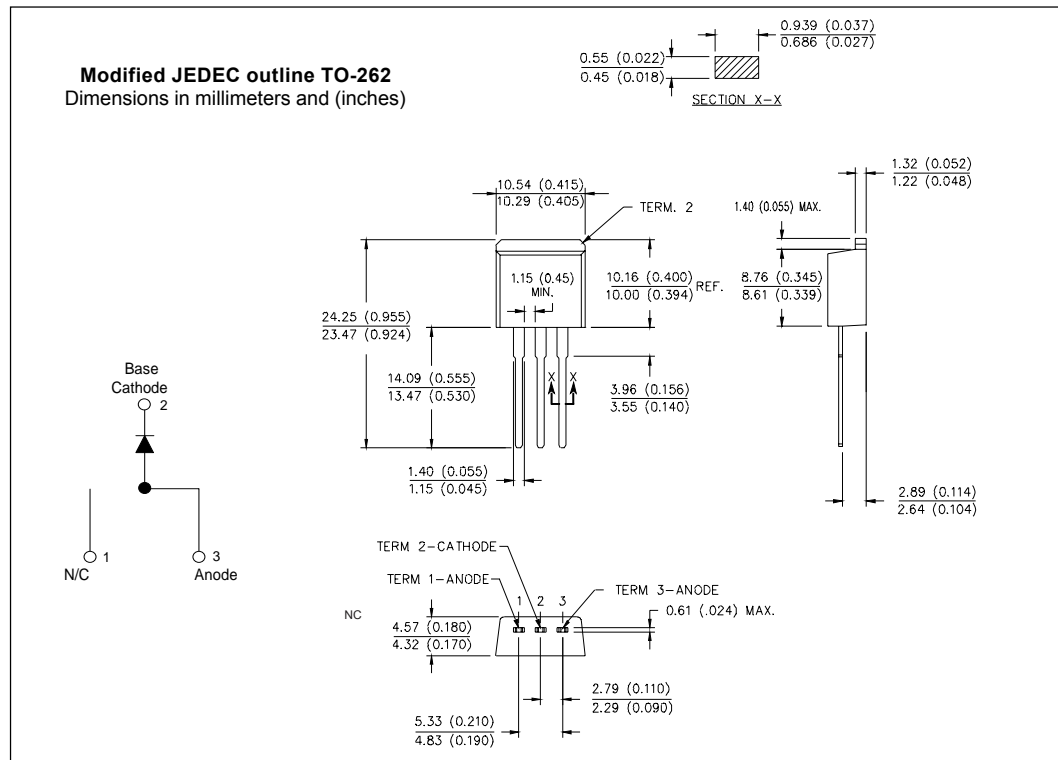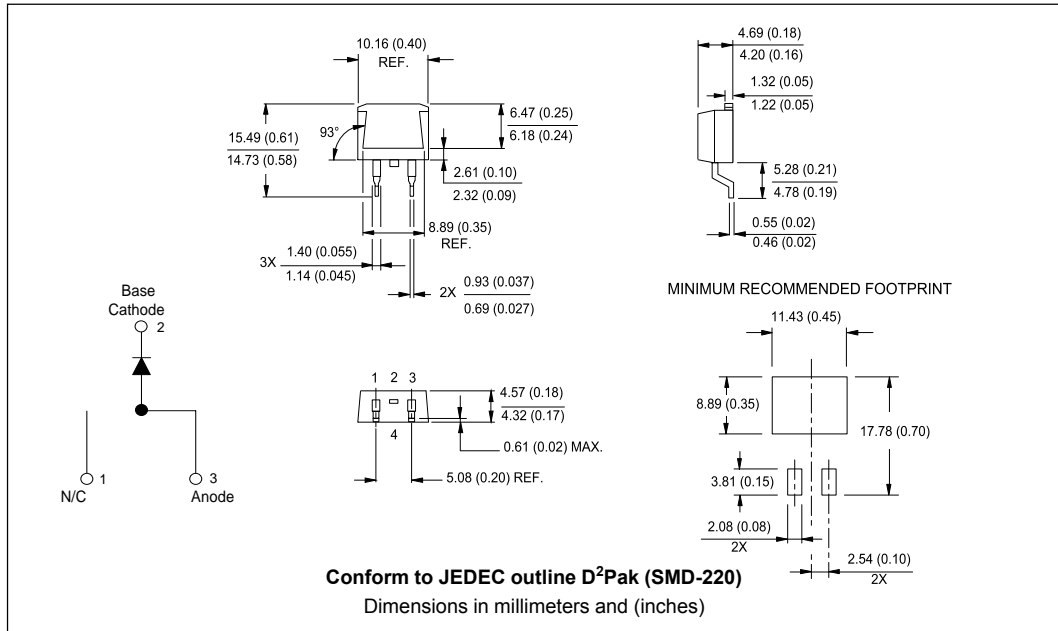


### Part Marking Information

#### D<sup>2</sup>PAK

EXAMPLE: THIS IS A MURB820  
LOT CODE 8024  
ASSEMBLED ON WW 02, 2000


Note: "P" in assembly line  
position indicates "Lead-Free"

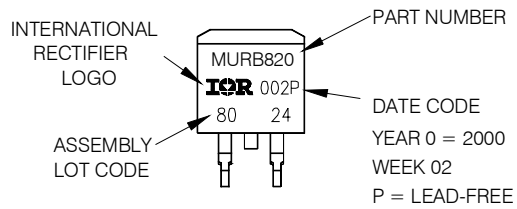


#### TO-262

EXAMPLE: THIS IS A MURB820-1  
LOT CODE 8024  
ASSEMBLED ON WW 02, 2000

Note: "P" in assembly line  
position indicates "Lead-Free"

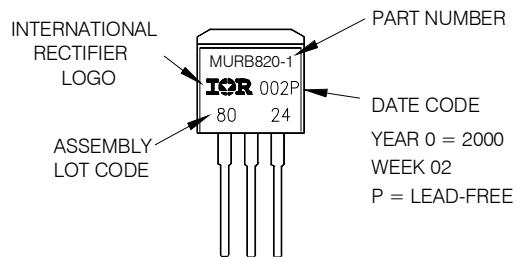

Tape & Reel Information

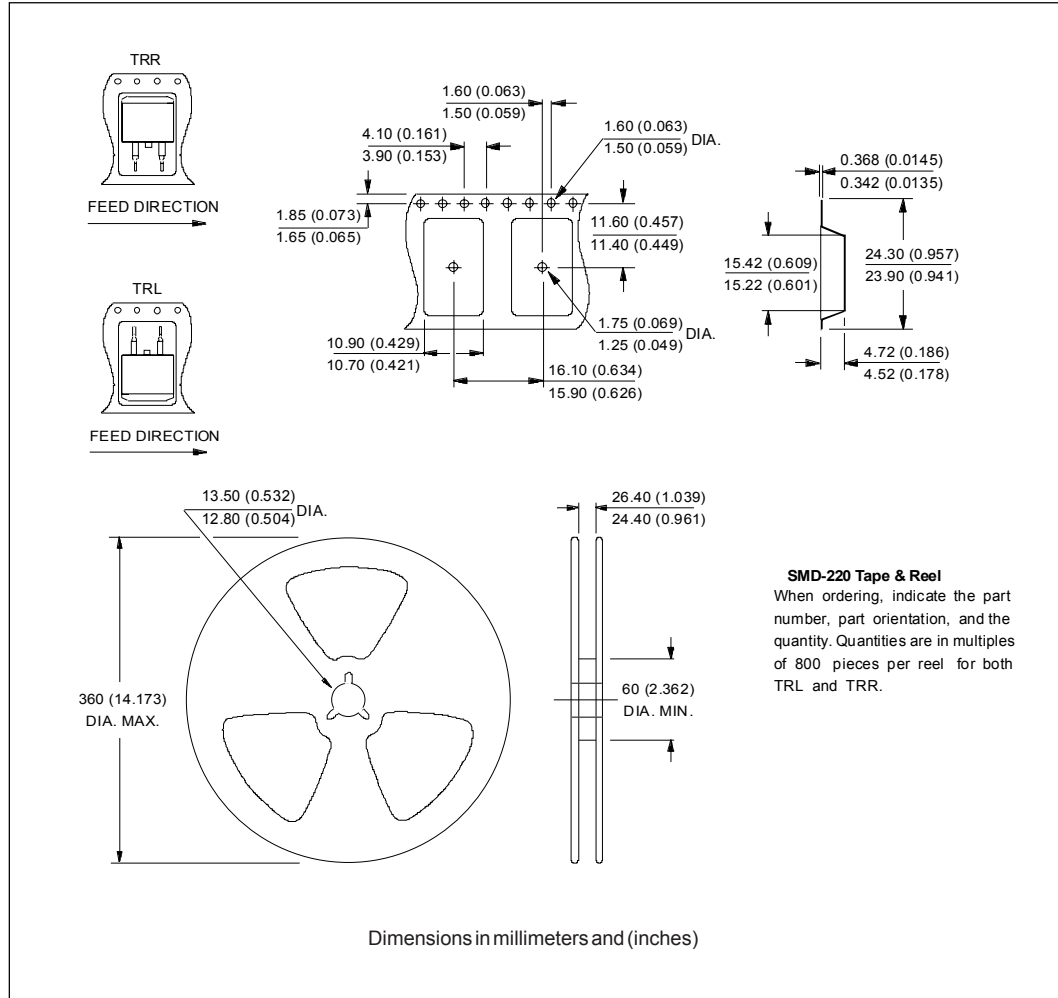

**SMD-220 Tape & Reel**  
When ordering, indicate the part number, part orientation, and the quantity. Quantities are in multiples of 800 pieces per reel for both TRL and TRR.



Ordering Information Table

Device Code	MUR	B	8	20	CT	-1	TRL	PbF
	①	②	③	④	⑤	⑥	⑦	⑧
<b>1</b>	-	Ultrafast MUR Series						
<b>2</b>	-	B = D <sup>2</sup> Pak/ TO-262						
<b>3</b>	-	Current Rating (8 = 8A)						
<b>4</b>	-	Voltage Rating (20 = 200V)						
<b>5</b>	-	CT = Center Tap (Dual) TO-220 /D <sup>2</sup> PAK/ TO-262						
<b>6</b>	-	-1 = TO-262						
<b>7</b>	-	<ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented, for D<sup>2</sup>PAK package)</li> <li>• TRR = Tape &amp; Reel (Right Oriented, for D<sup>2</sup>PAK package)</li> </ul>						
<b>8</b>	-	<ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul>						

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level and Lead-Free.  
 Qualification Standards can be found on IR's Web site.

MURB820PbF, MURB820-1PbF

Bulletin PD-21085 08/05

International  
**IOR** Rectifier

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level and Lead-Free.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 08/05