


Standard Recovery Diodes (Hockey PUK Version), 800 A

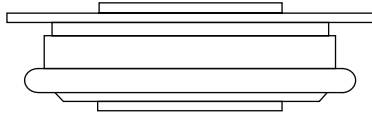

DO-200AA

FEATURES

- Wide current range
- High voltage ratings up to 2400 V
- High surge current capabilities
- Diffused junction
- Hockey PUK version
- Case style DO-200AA
- Lead (Pb)-free
- Designed and qualified for industrial level


**RoHS
COMPLIANT**
PRODUCT SUMMARY

| | |
|-------------|-------|
| $I_{F(AV)}$ | 800 A |
|-------------|-------|

TYPICAL APPLICATIONS

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

MAJOR RATINGS AND CHARACTERISTICS

| PARAMETER | TEST CONDITIONS | VALUES | UNITS |
|--------------|-----------------|-------------|-------------------|
| $I_{F(AV)}$ | | 800 | A |
| | T_{hs} | 55 | °C |
| $I_{F(RMS)}$ | | 1435 | A |
| | T_{hs} | 25 | °C |
| I_{FSM} | 50 Hz | 8250 | A |
| | 60 Hz | 8640 | |
| I^2t | 50 Hz | 340 | kA ² s |
| | 60 Hz | 311 | |
| V_{RRM} | Range | 400 to 2400 | V |
| T_J | | - 40 to 190 | °C |

ELECTRICAL SPECIFICATIONS
VOLTAGE RATINGS

| TYPE NUMBER | VOLTAGE CODE | V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V | V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V | I_{RRM} MAXIMUM AT $T_J = 150\text{ °C}$ mA |
|-------------|--------------|----------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------|
| SD400C..C | 04 | 400 | 500 | 15 |
| | 08 | 800 | 900 | |
| | 12 | 1200 | 1300 | |
| | 16 | 1600 | 1700 | |
| | 20 | 2000 | 2100 | |
| | 24 | 2400 | 2500 | |

| FORWARD CONDUCTION | | | | | |
|---------------------------------------------------------------|---------------|------------------------------------------------------------------------------------------|---------------------------|-----------|--------------------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | VALUES | UNITS |
| Maximum average forward current at heatsink temperature | $I_{F(AV)}$ | 180° conduction, half sine wave Double side (single side) cooled | | 800 (425) | A |
| | | | | 55 (85) | °C |
| Maximum RMS forward current | $I_{F(RMS)}$ | 25 °C heatsink temperature double side cooled | | 1435 | |
| Maximum peak, one-cycle forward, non-repetitive surge current | I_{FSM} | t = 10 ms | No voltage reappplied | 8250 | A |
| | | t = 8.3 ms | | 8640 | |
| | | t = 10 ms | 50 % V_{RRM} reappplied | 6940 | |
| | | t = 8.3 ms | | 7265 | |
| Maximum I^2t for fusing | I^2t | t = 10 ms | No voltage reappplied | 340 | kA ² s |
| | | t = 8.3 ms | | 311 | |
| | | t = 10 ms | 50 % V_{RRM} reappplied | 241 | |
| | | t = 8.3 ms | | 220 | |
| Maximum $I^2\sqrt{t}$ for fusing | $I^2\sqrt{t}$ | t = 0.1 to 10 ms, no voltage reappplied | | 3400 | kA ² √s |
| Low level value of threshold voltage | $V_{F(TO)1}$ | $(16.7 \% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ maximum | | 0.80 | V |
| High level value of threshold voltage | $V_{F(TO)2}$ | $(I > \pi \times I_{F(AV)})$, $T_J = T_J$ maximum | | 0.83 | |
| Low level value of forward slope resistance | r_{f1} | $(16.7 \% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ maximum | | 0.55 | mΩ |
| High level value of forward slope resistance | r_{f2} | $(I > \pi \times I_{F(AV)})$, $T_J = T_J$ maximum | | 0.53 | |
| Maximum forward voltage drop | V_{FM} | $I_{pk} = 1930$ A, $T_J = T_J$ maximum, $t_p = 10$ ms sinusoidal wave | | 1.86 | V |

| THERMAL AND MECHANICAL SPECIFICATIONS | | | | | |
|--------------------------------------------------|--------------|---------------------------------|--|-------------|--------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | VALUES | UNITS |
| Maximum junction operating temperature range | T_J | | | - 40 to 190 | °C |
| Maximum storage temperature range | T_{Stg} | | | - 55 to 200 | |
| Maximum thermal resistance, junction to heatsink | R_{thJ-hs} | DC operation single side cooled | | 0.163 | K/W |
| | | DC operation double side cooled | | 0.073 | |
| Mounting force, ± 10 % | | | | 4900 (500) | N (kg) |
| Approximate weight | | | | 70 | g |
| Case style | | See dimensions - link on page 5 | | DO-200AA | |

| ΔR_{thJ-hs} CONDUCTION | | | | | | |
|--------------------------------|-----------------------|-------------|------------------------|-------------|---------------------|-------|
| CONDUCTION ANGLE | SINUSOIDAL CONDUCTION | | RECTANGULAR CONDUCTION | | TEST CONDITIONS | UNITS |
| | SINGLE SIDE | DOUBLE SIDE | SINGLE SIDE | DOUBLE SIDE | | |
| 180° | 0.017 | 0.018 | 0.011 | 0.012 | $T_J = T_J$ maximum | K/W |
| 120° | 0.020 | 0.020 | 0.020 | 0.020 | | |
| 90° | 0.025 | 0.025 | 0.027 | 0.027 | | |
| 60° | 0.037 | 0.036 | 0.038 | 0.038 | | |
| 30° | 0.064 | 0.062 | 0.065 | 0.062 | | |

Note

- The table above shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC



SD400C..C Series

Standard Recovery Diodes Vishay High Power Products
(Hockey PUK Version), 800 A

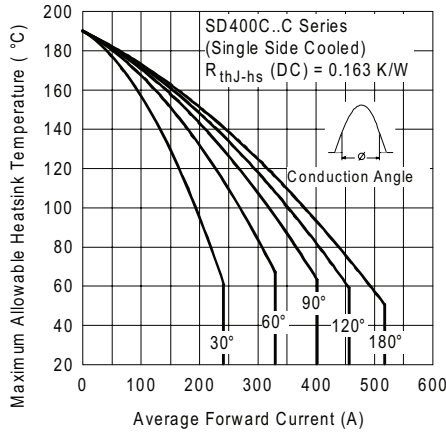


Fig. 1 - Current Ratings Characteristics

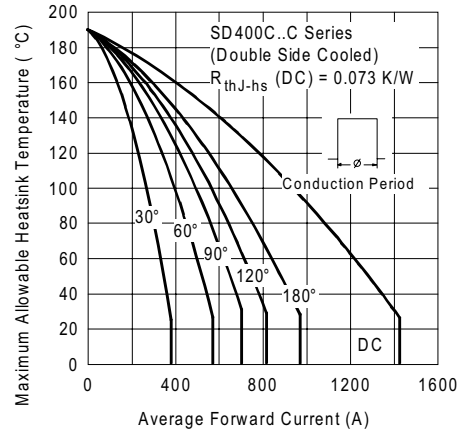


Fig. 4 - Current Ratings Characteristics

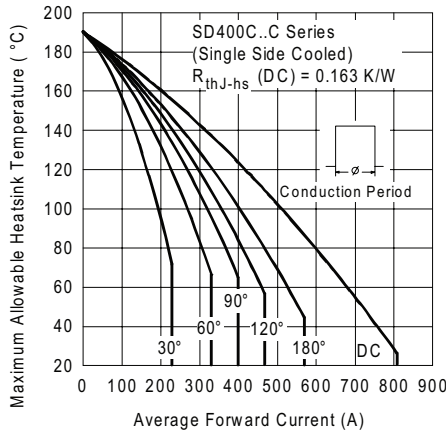


Fig. 2 - Current Ratings Characteristics

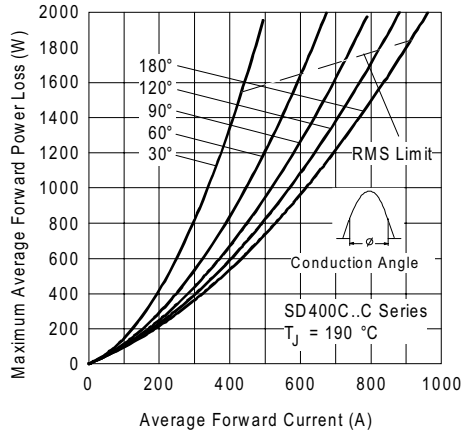


Fig. 5 - Forward Power Loss Characteristics

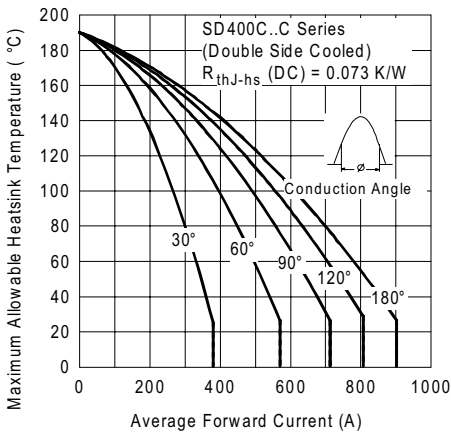


Fig. 3 - Current Ratings Characteristics

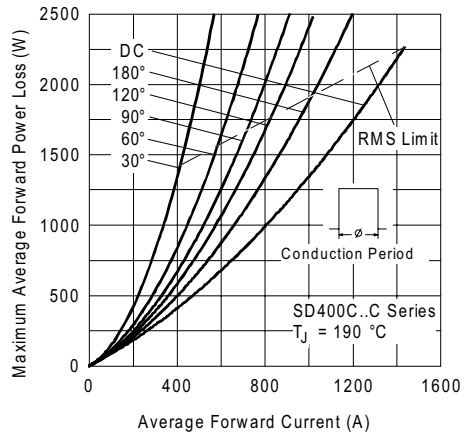


Fig. 6 - Forward Power Loss Characteristics

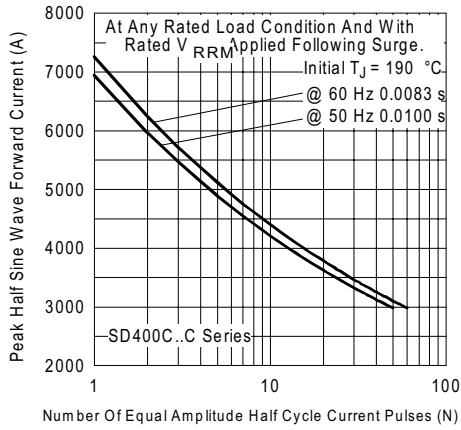


Fig. 7 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

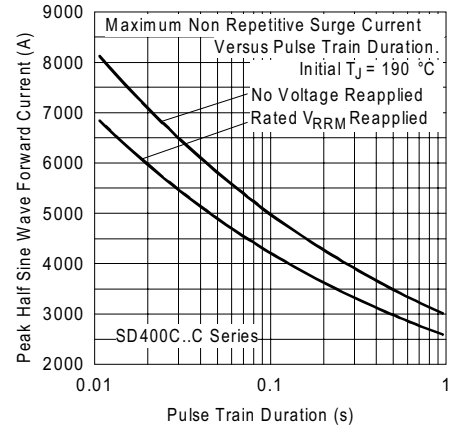


Fig. 8 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

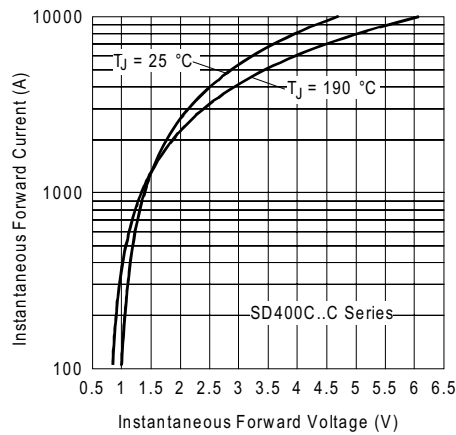


Fig. 9 - Forward Voltage Drop Characteristics


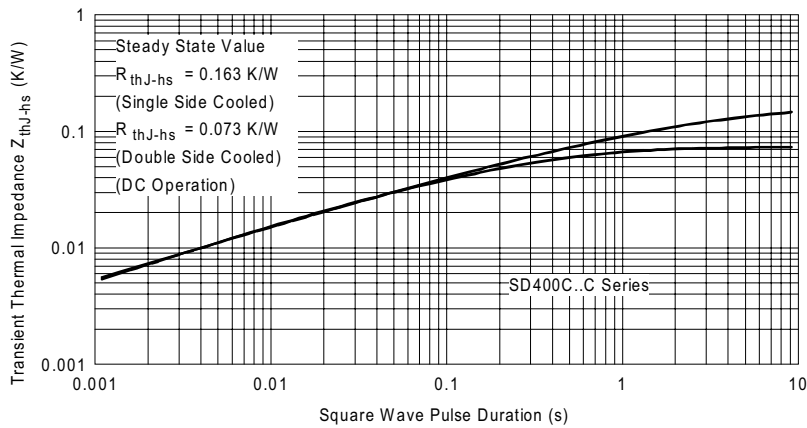


Fig. 10 - Thermal Impedance Z_{thJC} Characteristics



ORDERING INFORMATION TABLE

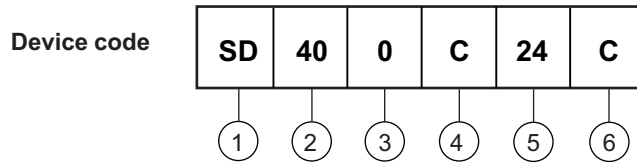

- 1** - Diode
- 2** - Essential part number
- 3** - 0 = Standard recovery
- 4** - C = Ceramic PUK
- 5** - Voltage code x 100 = V_{RRM} (see Voltage Ratings table)
- 6** - C = PUK case DO-200AA

| LINKS TO RELATED DOCUMENTS | |
|----------------------------|-------------------------------------------------------------------------------|
| Dimensions | http://www.vishay.com/doc?95248 |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.