

Dual N-Channel 20-V (D-S) MOSFET with Schottky Diode

PRODUCT SUMMARY			
	V _{DS} (V)	r _{DS(on)} (Ω)	I _D (A)
Channel-1	20	0.012 @ V _{GS} = 10 V	9.6
		0.0175 @ V _{GS} = 4.5 V	7.8
Channel-2		0.010 @ V _{GS} = 10 V	13.5
		0.0115 @ V _{GS} = 4.5 V	12.8


SCHOTTKY PRODUCT SUMMARY		
V _{DS} (V)	V _{SD} (V) Diode Forward Voltage	I _F (A)
20	0.53 V @ 3 A	2.0

FEATURES


- TrenchFET® Power MOSFET
- 100% R_g Tested

APPLICATIONS

- DC/DC Converters
 - Game Stations
 - Notebook PC Logic

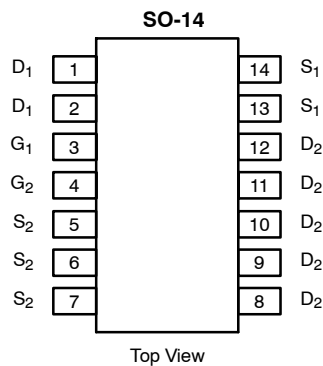

Ordering Information: Si4340DY
Si4340DY-T1 (with Tape and Reel)

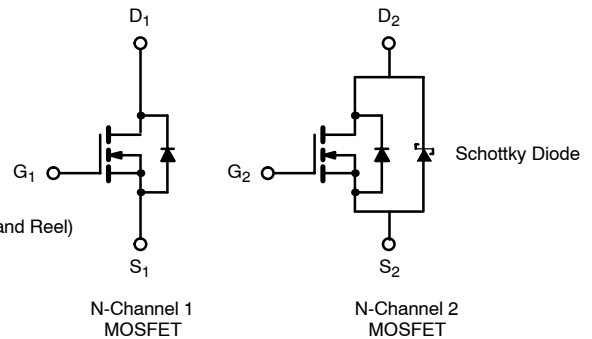

ABSOLUTE MAXIMUM RATINGS (T _A = 25 °C UNLESS OTHERWISE NOTED)							
Parameter	Symbol	Channel-1		Channel-2		Unit	
		10 secs	Steady State	10 secs	Steady State		
Drain-Source Voltage	V _{DS}	20				V	
Gate-Source Voltage	V _{GS}	± 20		± 16			
Continuous Drain Current (T _J = 150 °C) ^a	I _D	T _A = 25 °C	9.6	7.3	13.5	9.5	A
		T _A = 70 °C	7.7	5.8	10.8	7.5	
Pulsed Drain Current	I _{DM}	40		50		A	
Continuous Source Current (Diode Conduction) ^a	I _S	1.8	1.04	2.73	1.30		
Maximum Power Dissipation ^a	P _D	T _A = 25 °C	2.0	1.14	3.0	1.43	W
		T _A = 70 °C	1.28	0.73	1.9	0.91	
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to 150				°C	

THERMAL RESISTANCE RATINGS									
Parameter	Symbol	Channel-1		Channel-2		Schottky		Unit	
		Typ	Max	Typ	Max	Typ	Max		
Maximum Junction-to-Ambient ^a	R _{thJA}	t ≤ 10 sec	53	62.5	35	42	40	48	°C/W
		Steady-State	92	110	72	87	76	93	
Maximum Junction-to-Foot (Drain)	R _{thJF}	Steady-State	35	42	18	23	21	25	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.

MOSFET SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED).							
Parameter	Symbol	Test Condition	Min	Typ ^a	Max	Unit	
Static							
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	Ch-1	0.8		2.00	V
			Ch-2	0.8		1.90	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$	Ch-1			100	nA
		$V_{DS} = 0 \text{ V}, V_{GS} = \pm 12 \text{ V}$	Ch-2			100	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 20 \text{ V}, V_{GS} = 0 \text{ V}$	Ch-1			1	μA
			Ch-2			100	
		$V_{DS} = 20 \text{ V}, V_{GS} = 0 \text{ V}, T_J = 85^\circ\text{C}$	Ch-1			15	
			Ch-2			4000	
On-State Drain Current ^b	$I_{D(on)}$	$V_{DS} = 5 \text{ V}, V_{GS} = 10 \text{ V}$	Ch-1	20			A
			Ch-2	30			
Drain-Source On-State Resistance ^b	$r_{DS(on)}$	$V_{GS} = 10 \text{ V}, I_D = 9.6 \text{ A}$	Ch-1		0.0095	0.012	Ω
		$V_{GS} = 10 \text{ V}, I_D = 13.5 \text{ A}$	Ch-2		0.007	0.010	
		$V_{GS} = 4.5 \text{ V}, I_D = 7.8 \text{ A}$	Ch-1		0.0135	0.0175	
		$V_{GS} = 4.5 \text{ V}, I_D = 12.8 \text{ A}$	Ch-2		0.0085	0.0115	
Forward Transconductance ^b	g_{fs}	$V_{DS} = 15 \text{ V}, I_D = 9.6 \text{ A}$	Ch-1		25		S
		$V_{DS} = 15 \text{ V}, I_D = 13.5 \text{ A}$	Ch-2		38		
Diode Forward Voltage ^b	V_{SD}	$I_S = 1.8 \text{ A}, V_{GS} = 0 \text{ V}$	Ch-1		0.74	1.1	V
		$I_S = 2.73 \text{ A}, V_{GS} = 0 \text{ V}$	Ch-2		0.485	0.53	
Dynamic^a							
Total Gate Charge	Q_g	Channel-1 $V_{DS} = 10 \text{ V}, V_{GS} = 4.5 \text{ V}, I_D = 9.6 \text{ A}$ Channel-2 $V_{DS} = 10 \text{ V}, V_{GS} = 4.5 \text{ V}, I_D = -13.5 \text{ A}$	Ch-1		10	15	nC
			Ch-2		17	25	
Gate-Source Charge	Q_{gs}		Ch-1		3.3		
			Ch-2		4.5		
Gate-Drain Charge	Q_{gd}		Ch-1		3.1		
			Ch-2		4.5		
Gate Resistance	R_g	$f = 1 \text{ MHz}$	Ch-1	0.45	0.9	1.35	Ω
			Ch-2	0.7	1.4	2.1	
Turn-On Delay Time	$t_{d(on)}$	Channel-1 $V_{DD} = 10 \text{ V}, R_L = 10 \Omega$ $I_D \cong 1 \text{ A}, V_{GEN} = 10 \text{ V}, R_G = 6 \Omega$ Channel-2 $V_{DD} = 10 \text{ V}, R_L = 10 \Omega$ $I_D \cong 1 \text{ A}, V_{GEN} = 10 \text{ V}, R_G = 6 \Omega$	Ch-1		15	25	ns
Rise Time	t_r		Ch-1		16	25	
			Ch-2		22	35	
Turn-Off Delay Time	$t_{d(off)}$		Ch-1		42	65	
			Ch-2		68	100	
Fall Time	t_f		Ch-1		16	25	
			Ch-2		19	30	
Source-Drain Reverse Recovery Time	t_{rr}		$I_F = 1.8 \text{ A}, di/dt = 100 \text{ A}/\mu\text{s}$	Ch-1		35	
		$I_F = 2.73 \text{ A}, di/dt = 100 \mu\text{A}/\mu\text{s}$	Ch-2		38	65	

Notes


- a. Guaranteed by design, not subject to production testing.
b. Pulse test; pulse width $\leq 300 \mu\text{s}$, duty cycle $\leq 2\%$.

SCHOTTKY SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)							
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit	
Forward Voltage Drop	V_F	$I_F = 3 \text{ A}$		0.485	0.53	V	
		$I_F = 3 \text{ A}, T_J = 125^\circ\text{C}$		0.42	0.42		
Maximum Reverse Leakage Current	I_{rm}	$V_r = 20 \text{ V}$		0.008	0.100	mA	
		$V_r = 20 \text{ V}, T_J = 75^\circ\text{C}$		0.4	5		
		$V_r = -20 \text{ V}, T_J = 125^\circ\text{C}$		6.5	20		
Junction Capacitance	C_T	$V_r = 15 \text{ V}$		102		pF	




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) CHANNEL-1


Output Characteristics

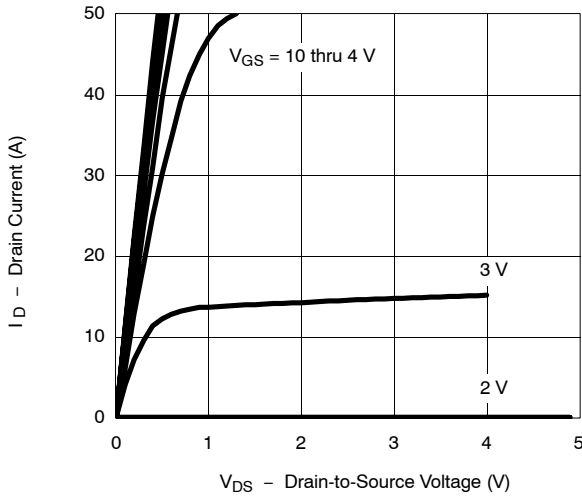


Transfer Characteristics

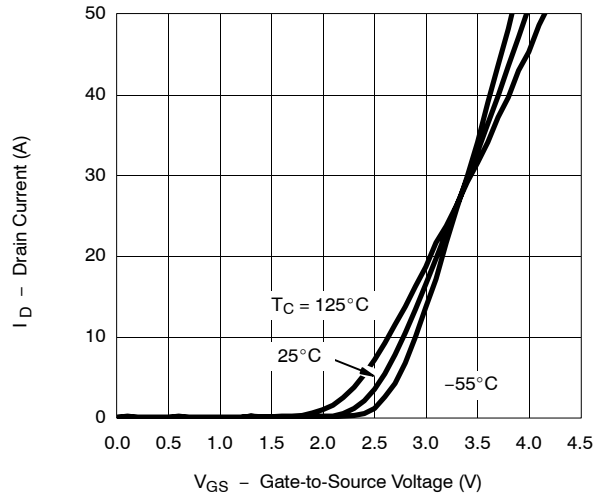


On-Resistance vs. Drain Current

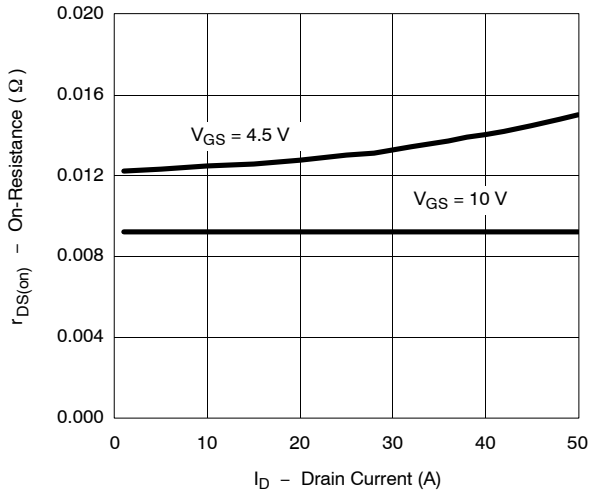


Capacitance

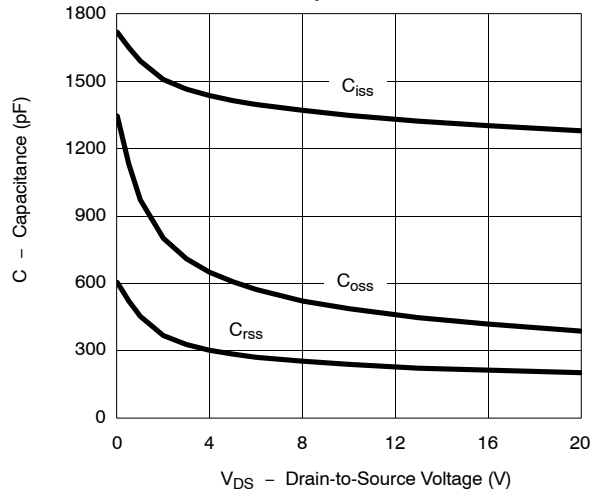

Gate Charge

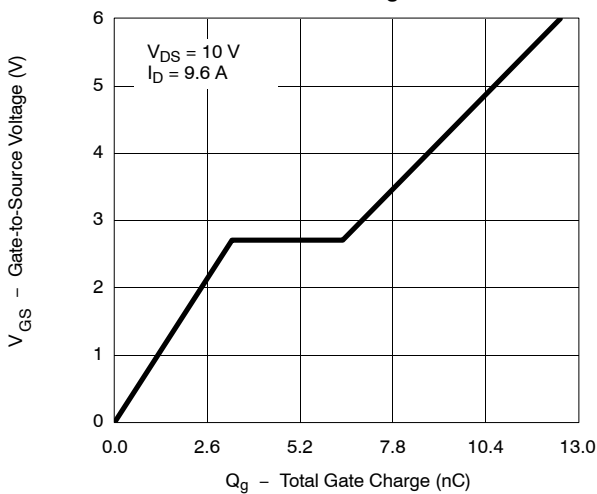

On-Resistance vs. Junction Temperature

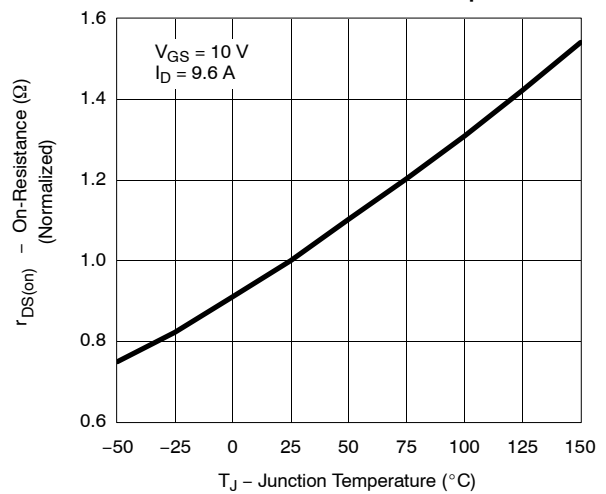





TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

CHANNEL-1


Source-Drain Diode Forward Voltage

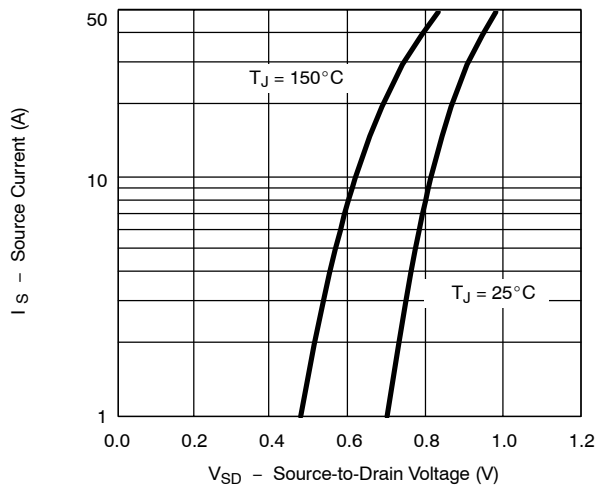


On-Resistance vs. Gate-to-Source Voltage

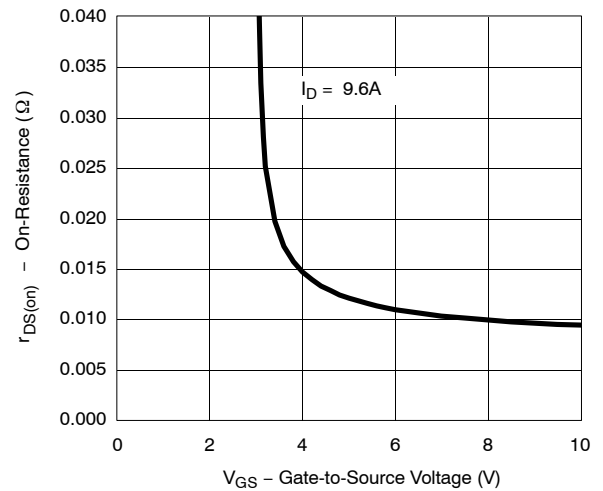


Threshold Voltage

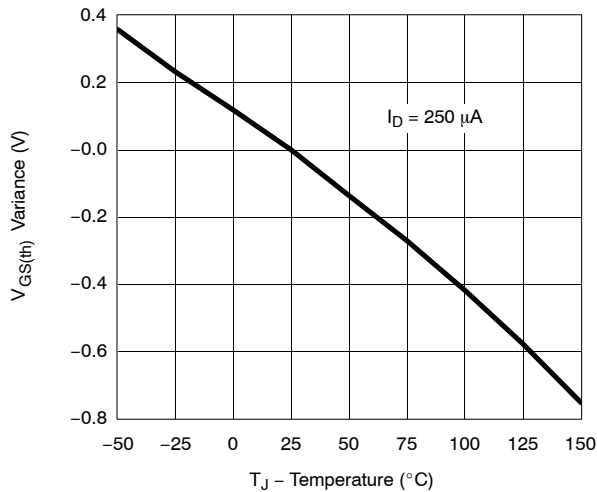

Single Pulse Power

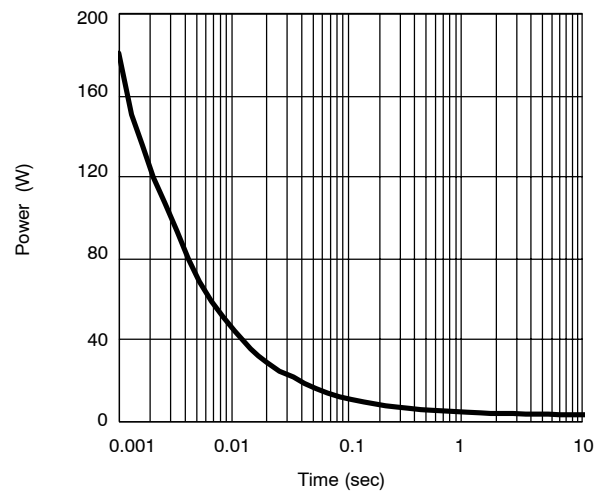


Safe Operating Area, Junction-to-Case

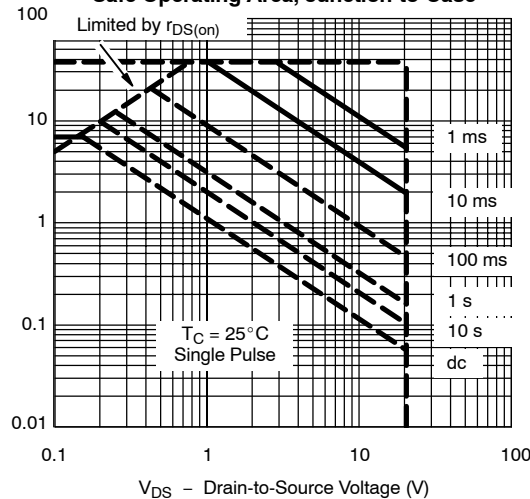




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) CHANNEL-1

Normalized Thermal Transient Impedance, Junction-to-Ambient

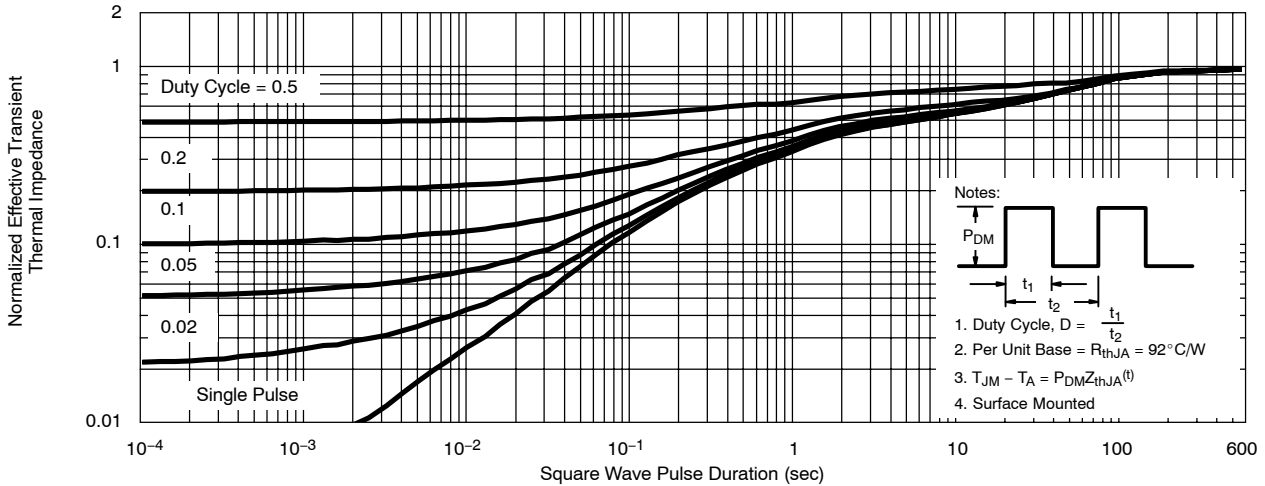







Normalized Thermal Transient Impedance, Junction-to-Foot

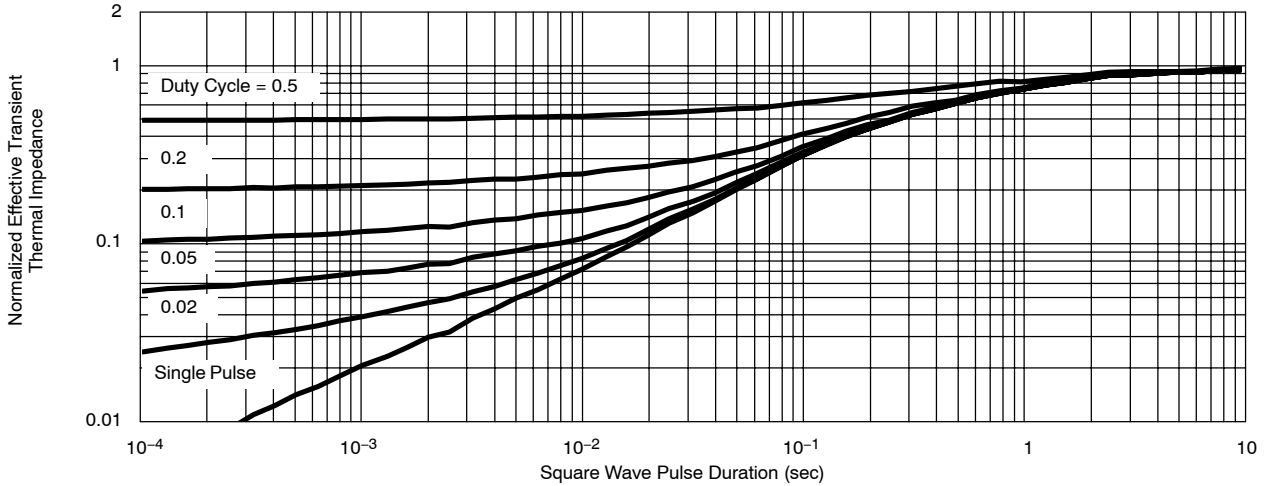



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)


CHANNEL-2

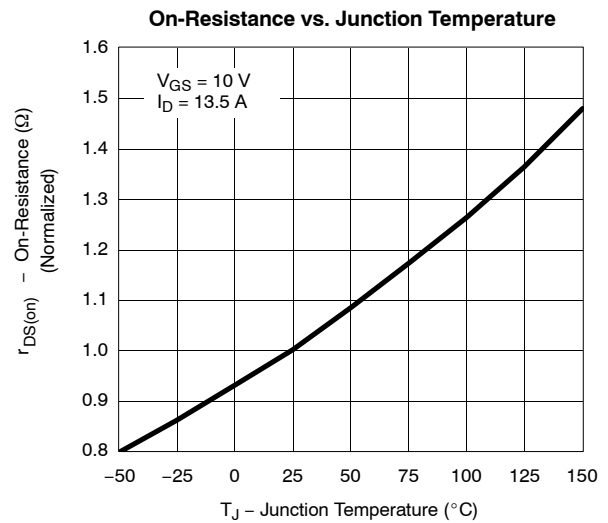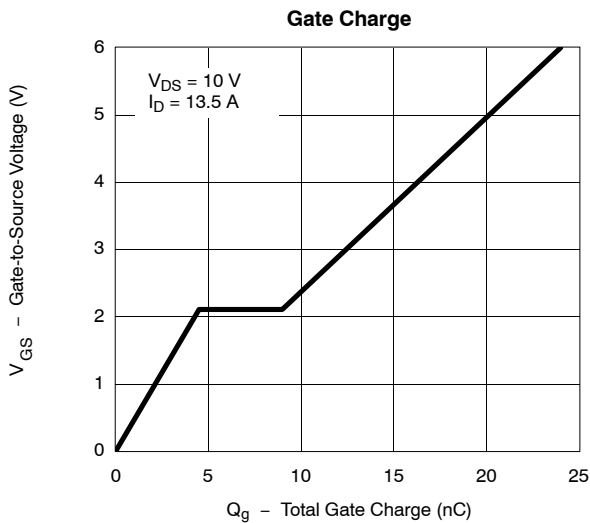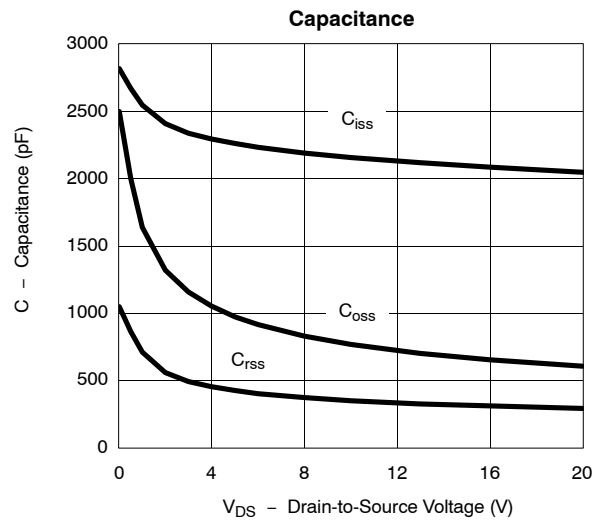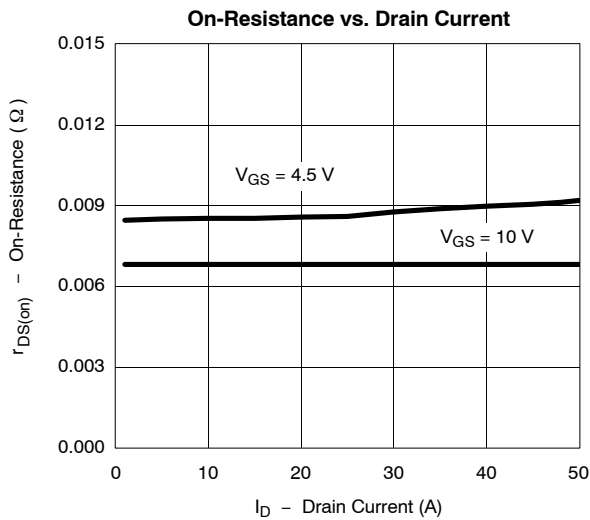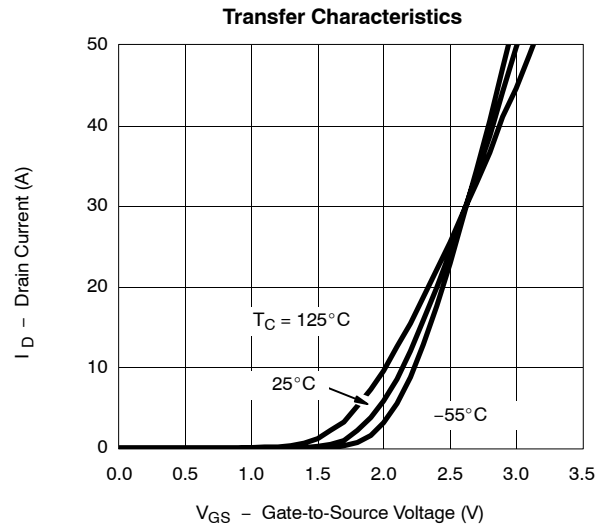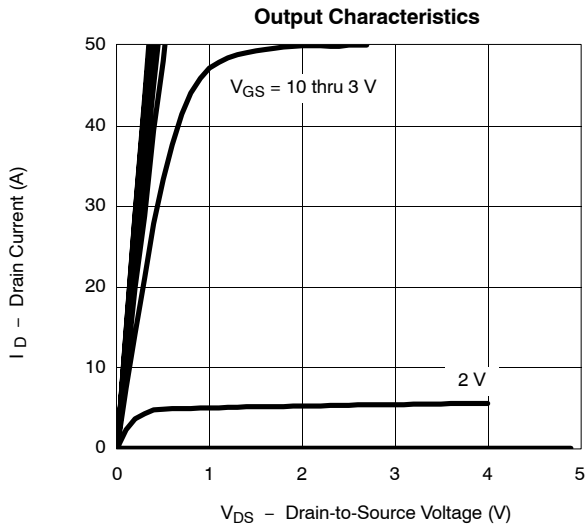




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) CHANNEL-2


Source-Drain Diode Forward Voltage

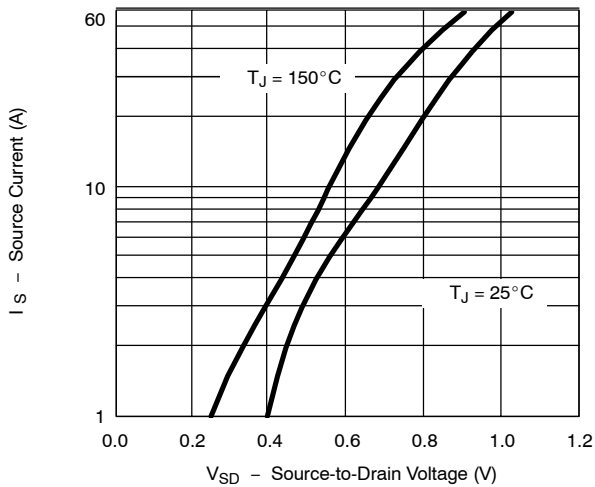


On-Resistance vs. Gate-to-Source Voltage

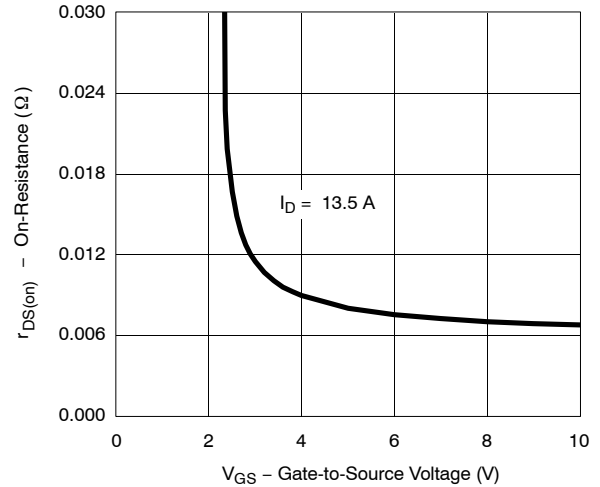


Reverse Current vs. Junction Temperature

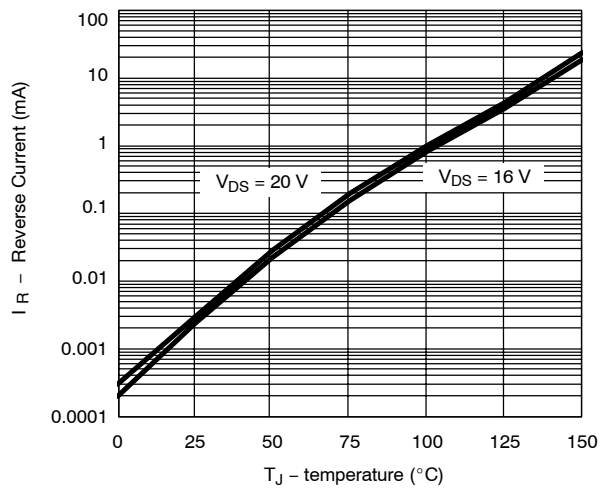

Single Pulse Power

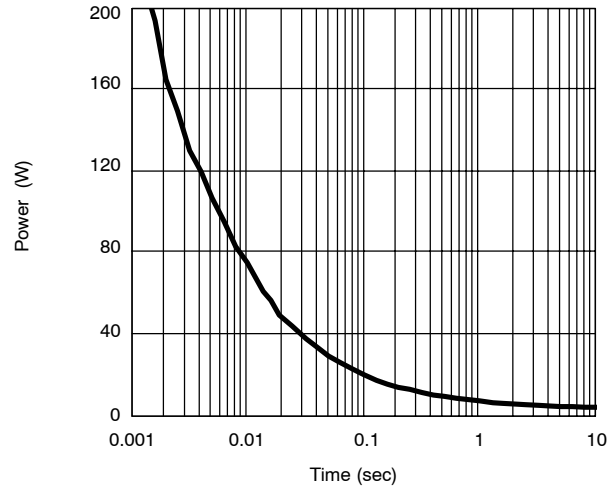


Safe Operating Area, Junction-to-Case

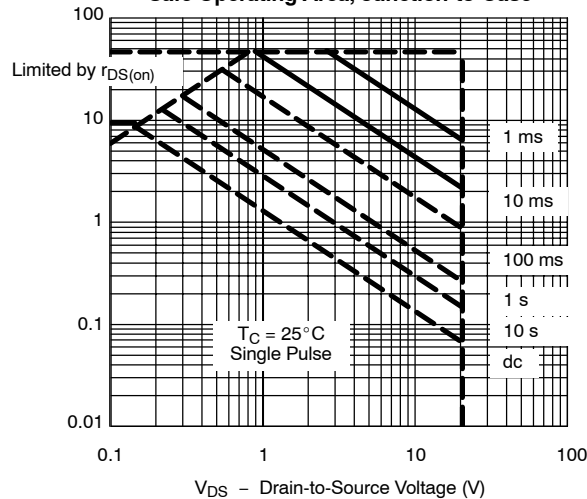


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

CHANNEL-2

Normalized Thermal Transient Impedance, Junction-to-Ambient

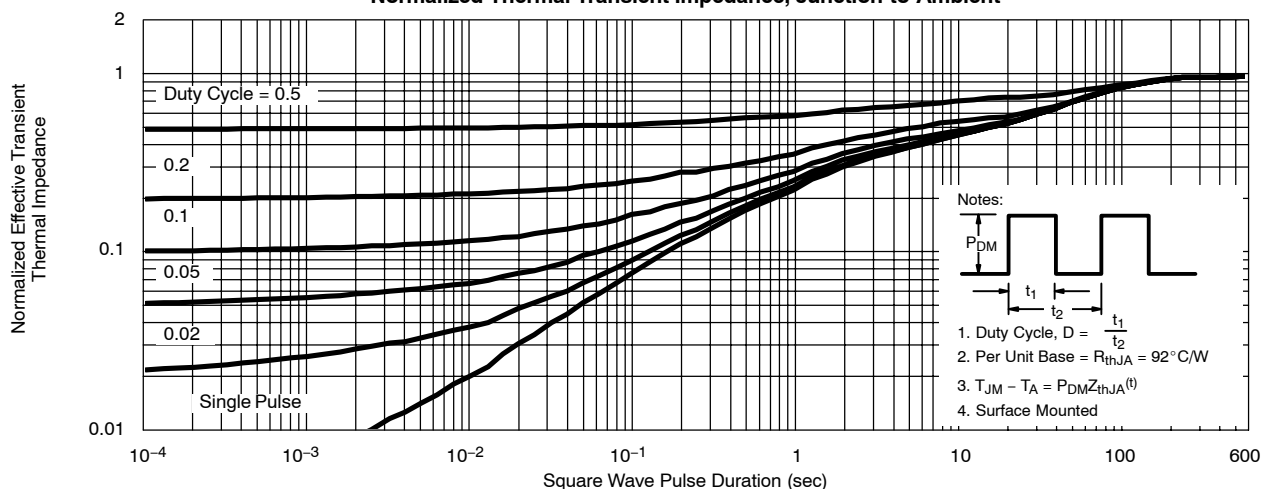


Normalized Thermal Transient Impedance, Junction-to-Foot

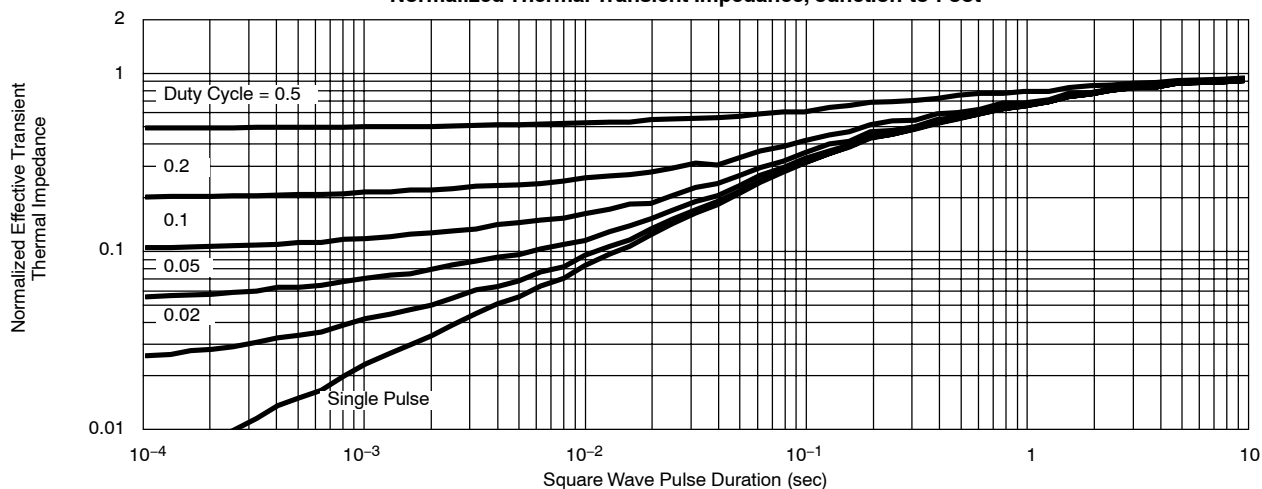


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

SCHOTTKY

Reverse Current vs. Junction Temperature

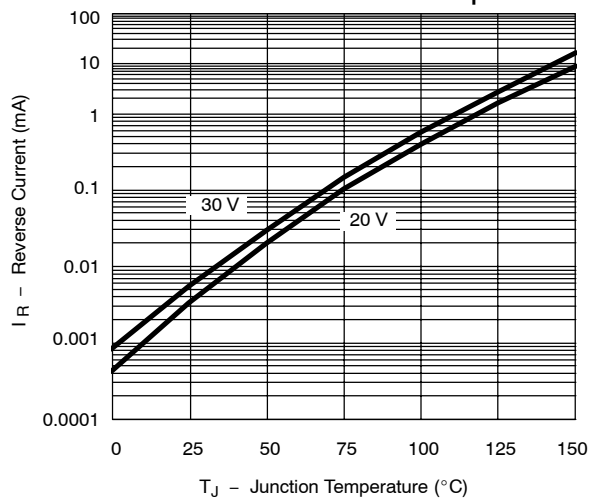




Forward Voltage Drop

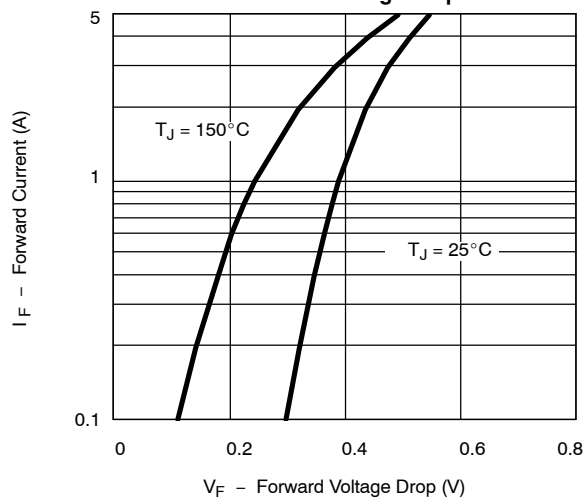



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

SCHOTTKY

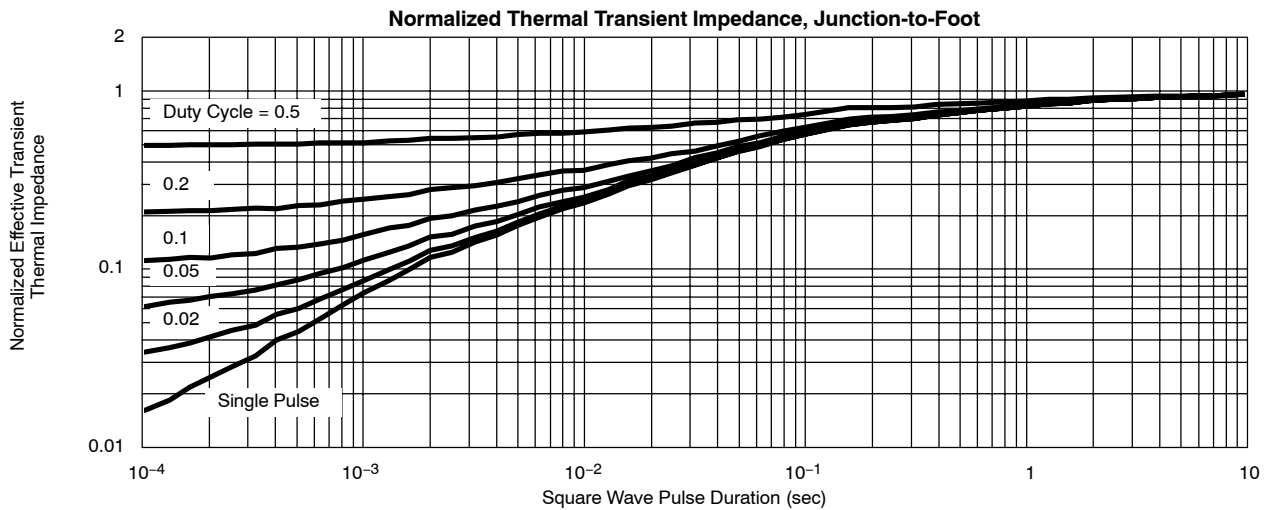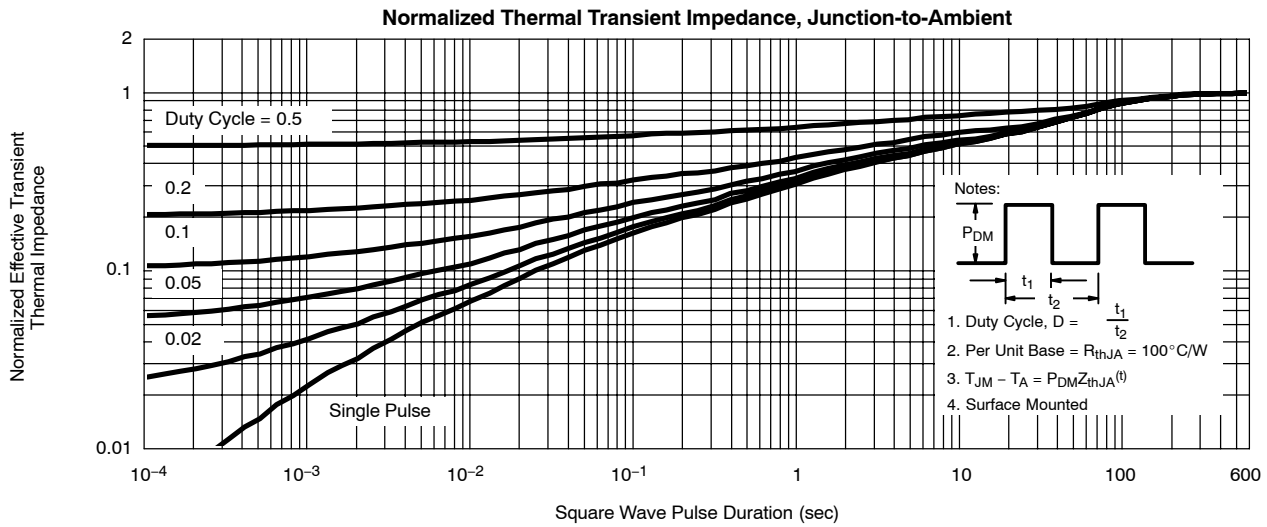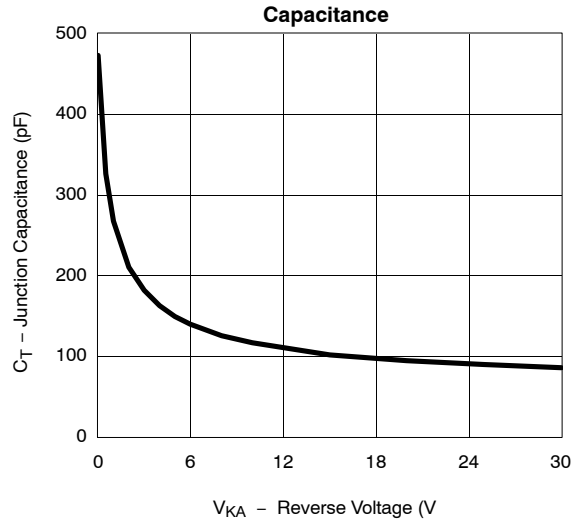



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.