



## STB50NE10

N-channel 100V - 0.021 $\Omega$  - 50A - D<sup>2</sup>PAK  
STripFET™ Power MOSFET

### General features

| Type      | V <sub>DSS</sub> | R <sub>DS(on)</sub> | I <sub>D</sub> |
|-----------|------------------|---------------------|----------------|
| STB50NE10 | 100V             | <0.027 $\Omega$     | 50A            |


- Exceptional dv/dt capability
- 100% avalanche tested
- Low gate charge at 100 °C
- Application oriented characterization

### Description


This Power MOSFET is the latest development of STMicroelectronics unique "Single Feature Size™" strip-based process. The resulting transistor shows extremely high packing density for low on-resistance, rugged avalanche characteristics and less critical alignment steps therefore a remarkable manufacturing reproducibility.

### Applications

- Switching application

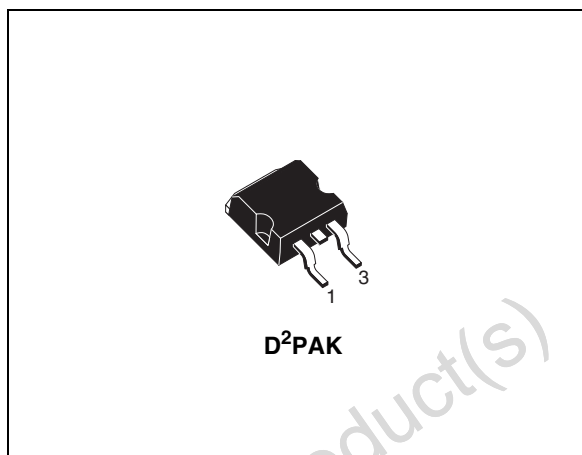

### Internal schematic diagram

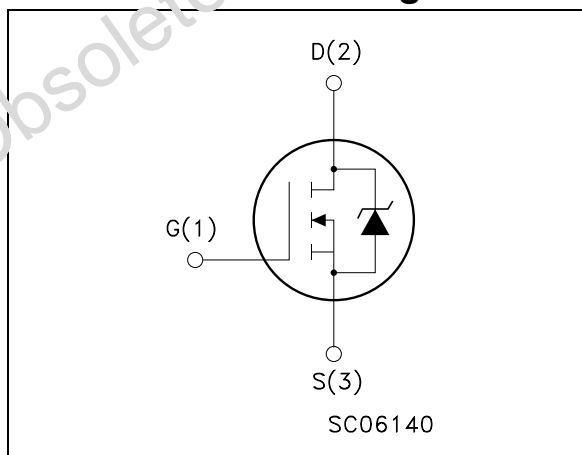

### Order codes

| Part number | Marking | Package            | Packaging   |
|-------------|---------|--------------------|-------------|
| STB50NE10T4 | B50NE10 | D <sup>2</sup> PAK | Tape & reel |

# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Electrical ratings</b> .....           | <b>3</b>  |
| <b>2</b> | <b>Electrical characteristics</b> .....   | <b>4</b>  |
| 2.1      | Electrical characteristics (curves) ..... | 6         |
| <b>3</b> | <b>Test circuit</b> .....                 | <b>8</b>  |
| <b>4</b> | <b>Package mechanical data</b> .....      | <b>9</b>  |
| <b>5</b> | <b>Packing mechanical data</b> .....      | <b>11</b> |
| <b>6</b> | <b>Revision history</b> .....             | <b>12</b> |

Obsolete Product(s) - Obsolete Product(s)

# 1 Electrical ratings

**Table 1. Absolute maximum ratings**

| Symbol         | Parameter   | Value      | Unit                |
|----------------|---|------------|---------------------|
| $V_{DS}$       | Drain-source voltage ( $V_{GS} = 0$ )                   | 100        | V                   |
| $V_{DGR}$      | Drain-gate voltage ( $R_{GS} = 20 \text{ k}\Omega$ )    | 100        | V                   |
| $V_{GS}$       | Gate- source voltage                                    | $\pm 20$   | V                   |
| $I_D$          | Drain current (continuous) at $T_C = 25^\circ\text{C}$  | 50         | A                   |
| $I_D$          | Drain current (continuous) at $T_C = 100^\circ\text{C}$ | 35         | A                   |
| $I_{DM}^{(1)}$ | Drain current (pulsed)                                  | 200        | A                   |
| $P_{tot}$      | Total dissipation at $T_C = 25^\circ\text{C}$           | 180        | W                   |
|                | Derating Factor   | 1.2        | W/ $^\circ\text{C}$ |
| dv/dt          | Peak diode recovery voltage slope                       | 6          | V/ns                |
| $T_{stg}$      | Storage temperature                                     | -65 to 175 | $^\circ\text{C}$    |
| $T_j$          | Max. operating junction temperature                     |            |                     |

1. Pulse width limited by safe operating area.

**Table 2. Thermal data**

|           |  |      |                           |
|-----------|--|------|---------------------------|
| Rthj-case | Thermal resistance junction-case max           | 0.83 | $^\circ\text{C}/\text{W}$ |
| Rthj-amb  | Thermal resistance junction-ambient max        | 62.5 | $^\circ\text{C}/\text{W}$ |
| Rthj-sink | Thermal resistance case-sink max               | 0.5  | $^\circ\text{C}/\text{W}$ |
| $T_J$     | Maximum lead temperature for soldering purpose | 300  | $^\circ\text{C}$          |

**Table 3. Avalanche characteristics**

| Symbol   | Parameter   | Max value | Unit |
|----------|---|-----------|------|
| $I_{AR}$ | Avalanche current, repetitive or not-repetitive (pulse width limited by $T_j$ max)                            | 50        | A    |
| $E_{AS}$ | Single pulse avalanche energy (starting $T_j = 25^\circ\text{C}$ , $I_D = I_{AR}$ , $V_{DD} = 50 \text{ V}$ ) | 300       | mJ   |

## 2 Electrical characteristics

( $T_{CASE}=25^{\circ}C$  unless otherwise specified)

**Table 4. On/off states**

| Symbol        | Parameter  | Test conditions   | Min. | Typ.  | Max.      | Unit               |
|---------------|--|---|------|-------|-----------|--------------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage                   | $I_D = 250\mu A, V_{GS} = 0$  | 100  |       |           | V                  |
| $I_{DSS}$     | Zero gate voltage drain current ( $V_{GS} = 0$ ) | $V_{DS} = \text{Max rating}$<br>$V_{DS} = \text{Max rating},$<br>$T_C = 125^{\circ}C$ |      |       | 1<br>10   | $\mu A$<br>$\mu A$ |
| $I_{GSS}$     | Gate-body leakage current ( $V_{DS} = 0$ )       | $V_{GS} = \pm 20V$  |      |       | $\pm 100$ | nA                 |
| $V_{GS(th)}$  | Gate threshold voltage                           | $V_{DS} = V_{GS}, I_D = 250\mu A$   | 2    | 3     | 4         | V                  |
| $R_{DS(on)}$  | Static drain-source on resistance                | $V_{GS} = 10V, I_D = 25A$   |      | 0.021 | 0.027     | $\Omega$           |

**Table 5. Dynamic**

| Symbol  | Parameter   | Test conditions   | Min. | Typ.                  | Max. | Unit                 |
|---|---|---|------|-----------------------|------|----------------------|
| $g_{fs}^{(1)}$                                | Forward transconductance  | $V_{DS}=V_{DS}>I_{D(on)}\times R_{DS(on)}$<br>$max, I_D = 20A$                                    | 20   | 35                    |      | S                    |
| $C_{iss}$<br>$C_{oss}$<br>$C_{rss}$           | Input capacitance<br>Output capacitance<br>Reverse transfer capacitance | $V_{DS} = 25V, f = 1MHz,$<br>$V_{GS} = 0$   |      | 4350<br>500<br>175    | 6000 | pF<br>pF<br>pF       |
| $t_{d(on)}$<br>$t_r$<br>$t_{d(off)}$<br>$t_f$ | Turn-on delay time<br>Rise time<br>Turn-off delay time<br>Fall time     | $V_{DD} = 50V, I_D = 25A$<br>$R_G = 4.7\Omega, V_{GS} = 10V$<br>(see <a href="#">Figure 12</a> )  |      | 25<br>100<br>45<br>35 |      | ns<br>ns<br>ns<br>ns |
| $Q_g$<br>$Q_{gs}$<br>$Q_{gd}$                 | Total gate charge<br>Gate-source charge<br>Gate-drain charge            | $V_{DD} = 80V, I_D = 50A,$<br>$V_{GS} = 10V, R_G = 4.7\Omega$<br>(see <a href="#">Figure 13</a> ) |      | 123<br>24<br>47       | 166  | nC<br>nC<br>nC       |

1. Pulsed: Pulse duration = 300  $\mu s$ , duty cycle 1.5 %.

**Table 6. Source drain diode**

| Symbol                            | Parameter  | Test conditions  | Min. | Typ.               | Max.      | Unit          |
|-----------------------------------|--|--|------|--------------------|-----------|---------------|
| $I_{SD}$<br>$I_{SDM}^{(1)}$       | Source-drain current<br>Source-drain current<br>(pulsed)                     |  |      |                    | 50<br>200 | A<br>A        |
| $V_{SD}^{(2)}$                    | Forward on voltage   | $I_{SD} = 50A, V_{GS} = 0$   |      |                    | 1.5       | V             |
| $t_{rr}$<br>$Q_{rr}$<br>$I_{RRM}$ | Reverse recovery time<br>Reverse recovery charge<br>Reverse recovery current | $I_{SD} = 50A, di/dt = 100A/\mu s,$<br>$V_{DD} = 30V, T_j = 150^\circ C$<br>(see <a href="#">Figure 14</a> ) |      | 155<br>815<br>10.5 |           | ns<br>nC<br>A |

1. Pulse width limited by safe operating area.
2. Pulsed: Pulse duration = 300  $\mu s$ , duty cycle 1.5 %

Obsolete Product(s) - Obsolete Product(s)

## 2.1 Electrical characteristics (curves)

Figure 1. Safe operating area

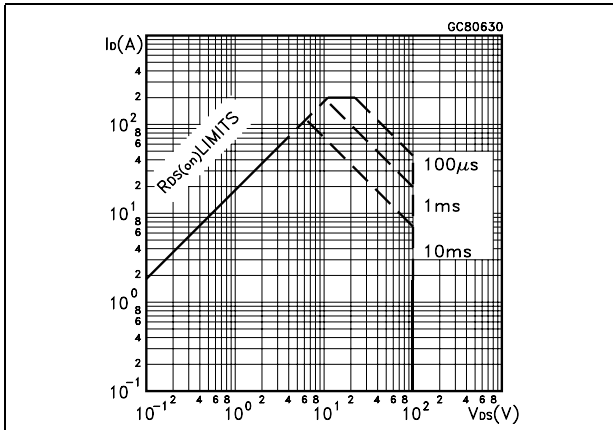


Figure 2. Thermal impedance

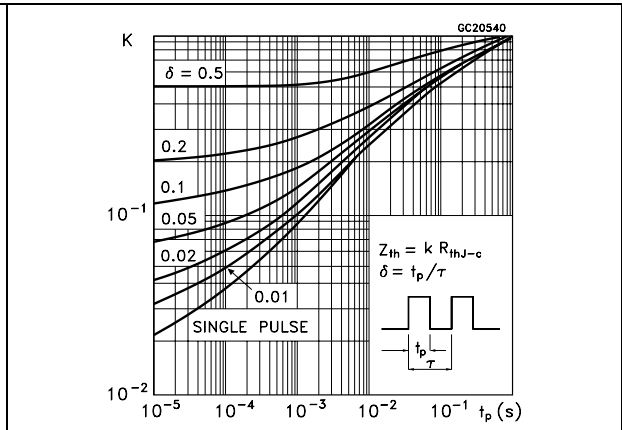


Figure 3. Output characteristics

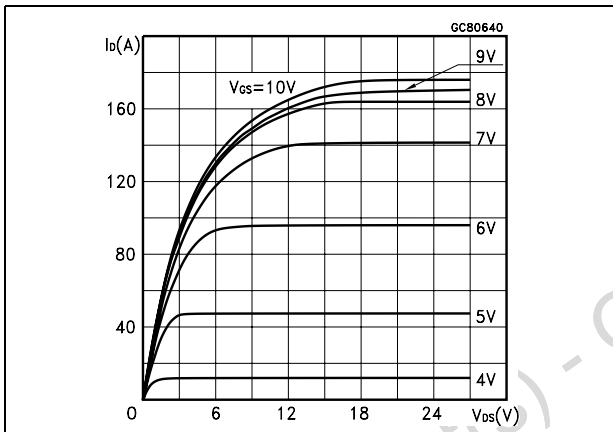


Figure 4. Transfer characteristics

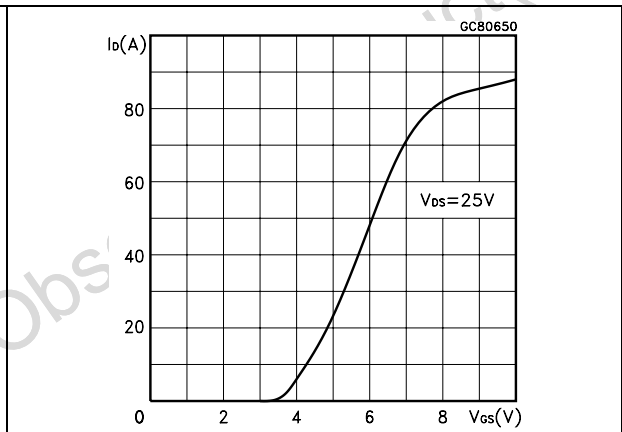


Figure 5. Transconductance

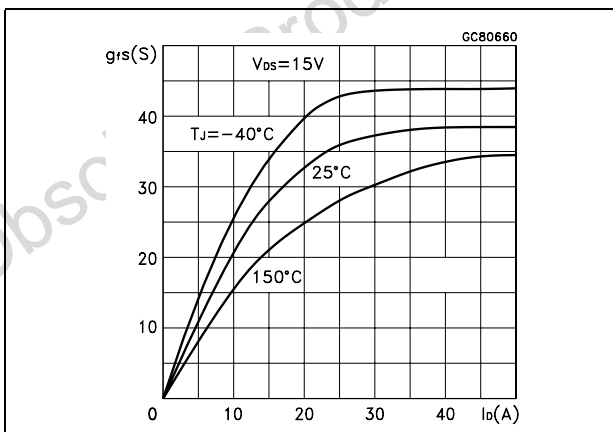


Figure 6. Static drain-source on resistance

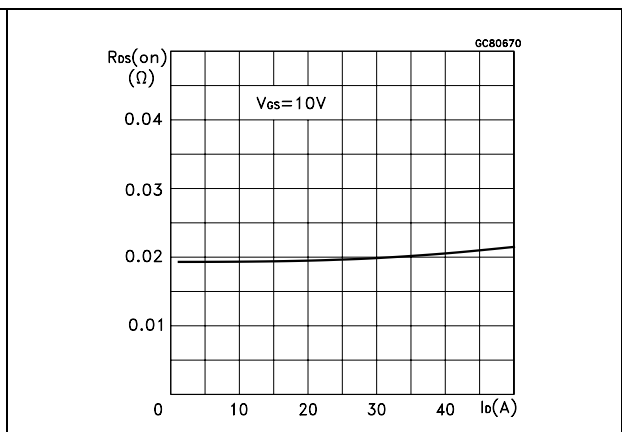


Figure 7. Gate charge vs gate-source voltage Figure 8. Capacitance variations

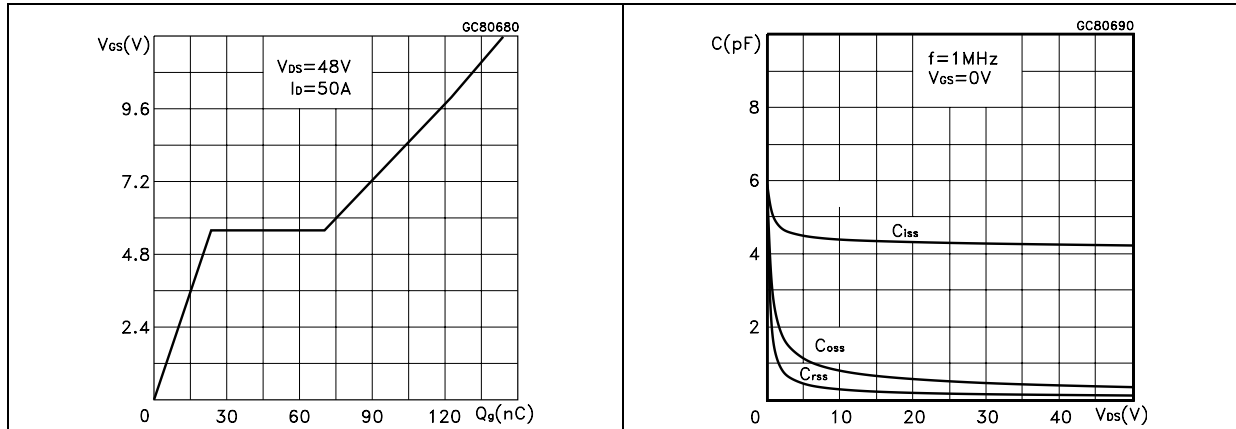


Figure 9. Normalized gate threshold voltage vs temperature Figure 10. Normalized on resistance vs temperature


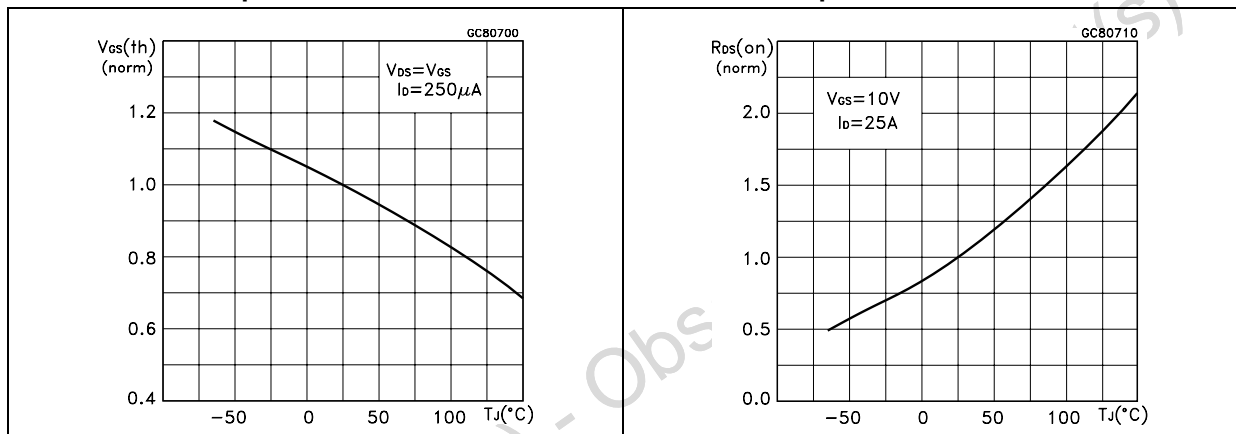


Figure 11. Source-drain diode forward characteristics

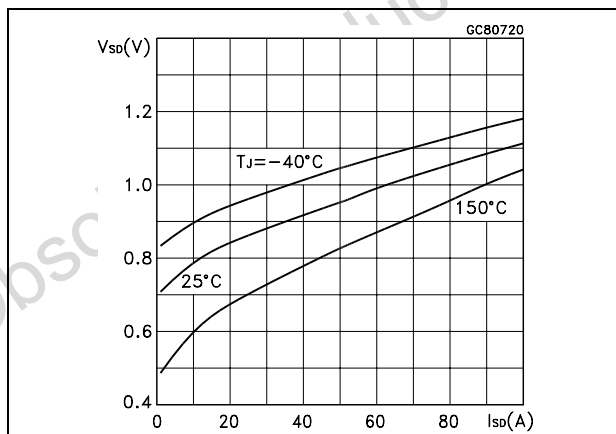

### 3 Test circuit

Figure 12. Switching times test circuit for resistive load

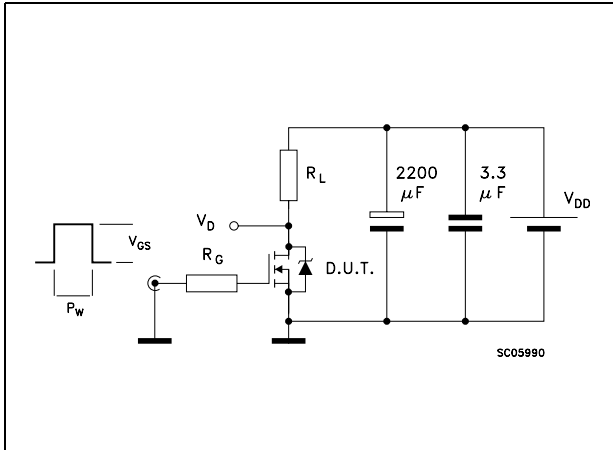


Figure 13. Gate charge test circuit

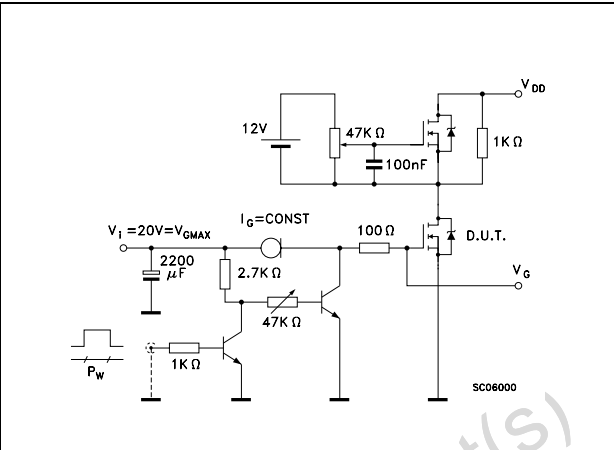


Figure 14. Test circuit for inductive load switching and diode recovery times

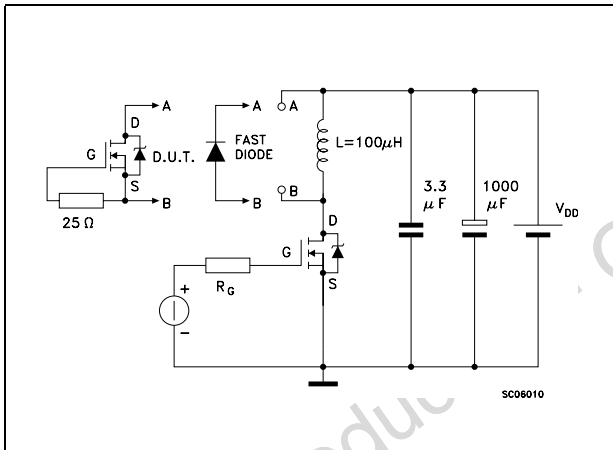


Figure 15. Unclamped Inductive load test circuit

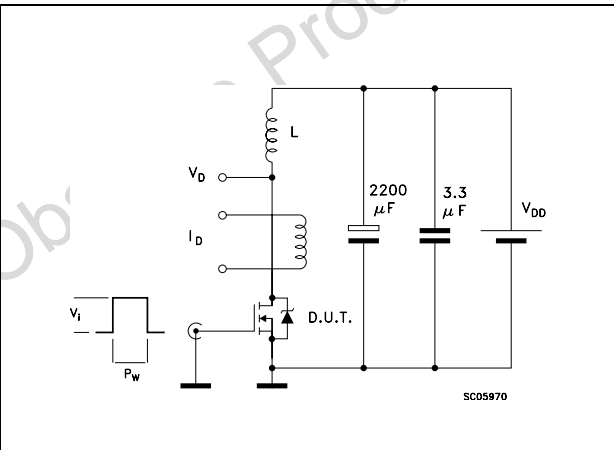


Figure 16. Unclamped inductive waveform


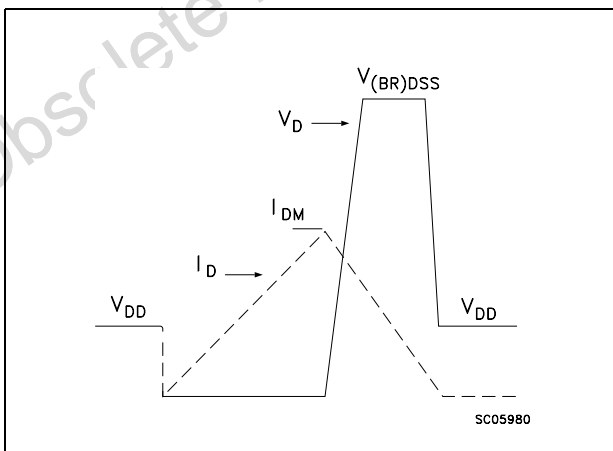


Figure 17. Switching time waveform



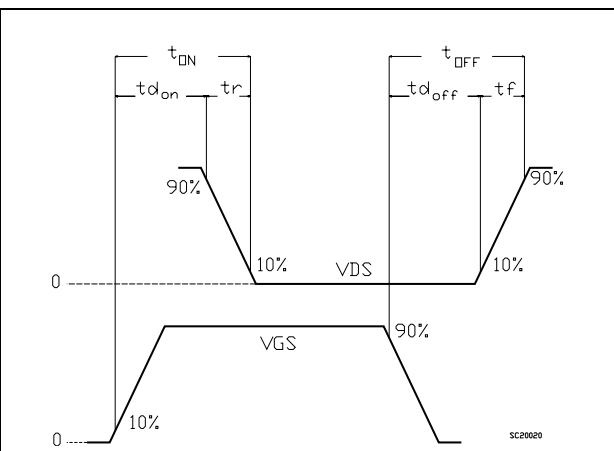


## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com)

Obsolete Product(s) - Obsolete Product(s)


**D<sup>2</sup>PAK MECHANICAL DATA**

| DIM. | mm.  |      |       | inch  |       |       |
|------|------|------|-------|-------|-------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.4  |      | 4.6   | 0.173 |       | 0.181 |
| A1   | 2.49 |      | 2.69  | 0.098 |       | 0.106 |
| A2   | 0.03 |      | 0.23  | 0.001 |       | 0.009 |
| B    | 0.7  |      | 0.93  | 0.027 |       | 0.036 |
| B2   | 1.14 |      | 1.7   | 0.044 |       | 0.067 |
| C    | 0.45 |      | 0.6   | 0.017 |       | 0.023 |
| C2   | 1.23 |      | 1.36  | 0.048 |       | 0.053 |
| D    | 8.95 |      | 9.35  | 0.352 |       | 0.368 |
| D1   |      | 8    |       |       | 0.315 |       |
| E    | 10   |      | 10.4  | 0.393 |       |       |
| E1   |      | 8.5  |       |       | 0.334 |       |
| G    | 4.88 |      | 5.28  | 0.192 |       | 0.208 |
| L    | 15   |      | 15.85 | 0.590 |       | 0.625 |
| L2   | 1.27 |      | 1.4   | 0.050 |       | 0.055 |
| L3   | 1.4  |      | 1.75  | 0.055 |       | 0.068 |
| M    | 2.4  |      | 3.2   | 0.094 |       | 0.126 |
| R    |      | 0.4  |       |       | 0.015 |       |
| V2   | 0°   |      | 4°    |       |       |       |

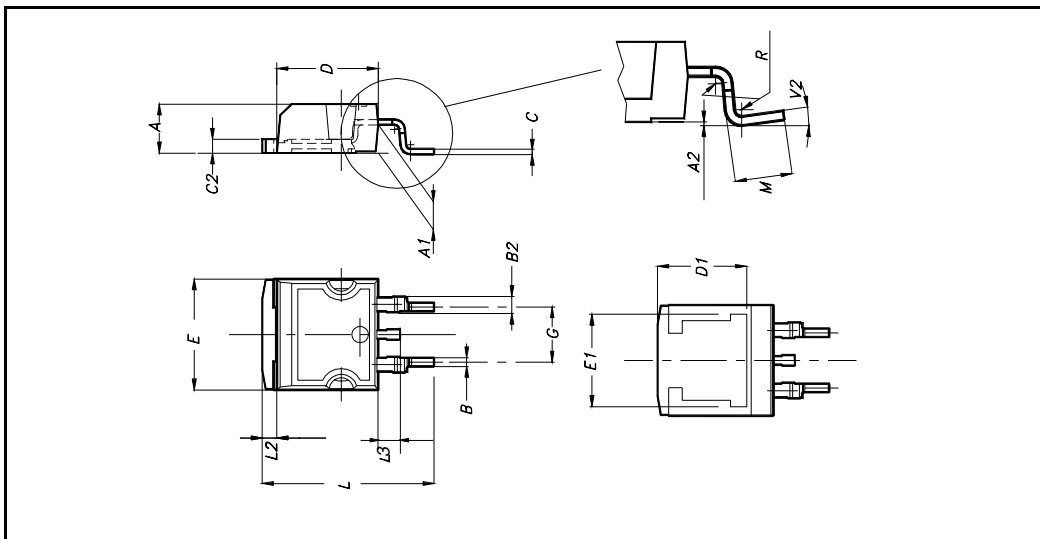

# 5 Packing mechanical data

## D<sup>2</sup>PAK FOOTPRINT

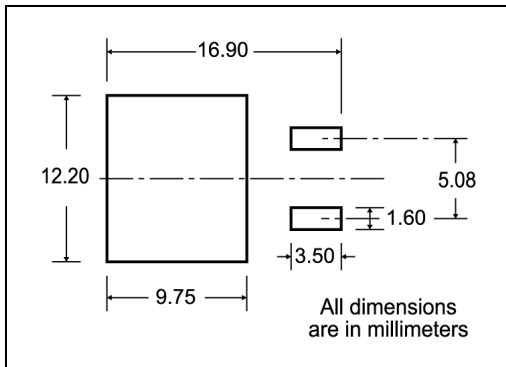

## TAPE AND REEL SHIPMENT

**TAPE MECHANICAL DATA**

| DIM. | mm   |      | inch   |        |
|------|------|------|--------|--------|
|      | MIN. | MAX. | MIN.   | MAX.   |
| A0   | 10.5 | 10.7 | 0.413  | 0.421  |
| B0   | 15.7 | 15.9 | 0.618  | 0.626  |
| D    | 1.5  | 1.6  | 0.059  | 0.063  |
| D1   | 1.59 | 1.61 | 0.062  | 0.063  |
| E    | 1.65 | 1.85 | 0.065  | 0.073  |
| F    | 11.4 | 11.6 | 0.449  | 0.456  |
| K0   | 4.8  | 5.0  | 0.189  | 0.197  |
| P0   | 3.9  | 4.1  | 0.153  | 0.161  |
| P1   | 11.9 | 12.1 | 0.468  | 0.476  |
| P2   | 1.9  | 2.1  | 0.075  | 0.082  |
| R    | 50   |      | 1.574  |        |
| T    | 0.25 | 0.35 | 0.0098 | 0.0137 |
| W    | 23.7 | 24.3 | 0.933  | 0.956  |

**REEL MECHANICAL DATA**

| DIM. | mm   |      | inch  |        |
|------|------|------|-------|--------|
|      | MIN. | MAX. | MIN.  | MAX.   |
| A    |      | 330  |       | 12.992 |
| B    | 1.5  |      | 0.059 |        |
| C    | 12.8 | 13.2 | 0.504 | 0.520  |
| D    | 20.2 |      | 0.795 |        |
| G    | 24.4 | 26.4 | 0.960 | 1.039  |
| N    | 100  |      | 3.937 |        |
| T    |      | 30.4 |       | 1.197  |

| BASE QTY | BULK QTY |
|----------|----------|
| 1000     | 1000     |

10 pitches cumulative tolerance on tape +/- 0.2 mm

Center line of cavity

Feeding radius

\* on sales type

## 6 Revision history

Table 7. Revision history

| Date        | Revision | Changes                         |
|-------------|----------|---------------------------------|
| 21-Jun-2004 | 4        | Complete version                |
| 26-Jun-2006 | 5        | New template, no content change |

Obsolete Product(s) - Obsolete Product(s)

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)