



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

DMMT3906

Features

- Epitaxial Planar Die Construction
- Ultra-small surface mount package
- Available in RoHs compliant version
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking:K3Q

PNP Small Signal Transistors

Maximum Ratings

Symbol	Parameter	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	-40	V
V_{CBO}	Collector-Base Voltage	-40	V
V_{EBO}	Emitter-Base Voltage	-5.0	V
I_C	Collector Current-Continuous ⁽¹⁾	-200	mA
P_C	Power dissipation ⁽¹⁾	200	mW
R_{THJA}	Thermal Resistance	625	$^{\circ}C/W$
T_J	Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS ⁽²⁾


$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-1.0mA$, $I_B=0$)	-40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-10\mu A$, $I_E=0$)	-40	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=-10\mu A$, $I_C=0$)	-5.0	---	Vdc
I_{CEX}	Collector-Base Cutoff Current ($V_{CE}=-30Vdc$, $V_{EB(OFF)}=-3.0Vdc$)	---	-50	nAdc
I_{BL}	Emitter-Base Cutoff Current ($V_{CE}=-30Vdc$, $V_{EB(OFF)}=-3.0Vdc$)	---	-50	nAdc

ON CHARACTERISTICS ⁽²⁾

h_{FE}	DC Current Gain ($I_C=-100\mu A$, $V_{CE}=-1.0Vdc$) ($I_C=-1.0mA$, $V_{CE}=-1.0Vdc$) ($I_C=-10mA$, $V_{CE}=-1.0Vdc$) ($I_C=-50mA$, $V_{CE}=-1.0Vdc$) ($I_C=-100mA$, $V_{CE}=-1.0Vdc$)	60 80 100 60 30	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=-10mA$, $I_B=-1.0mA$) ($I_C=-50mA$, $I_B=-5.0mA$)	---	-0.25 -0.40	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=-10mA$, $I_B=-1.0mA$) ($I_C=-50mA$, $I_B=-5.0mA$)	-0.65 ---	-0.85 -0.95	Vdc

Note: 1. Valid provided that terminals are kept at ambient temperature.

SOT-363

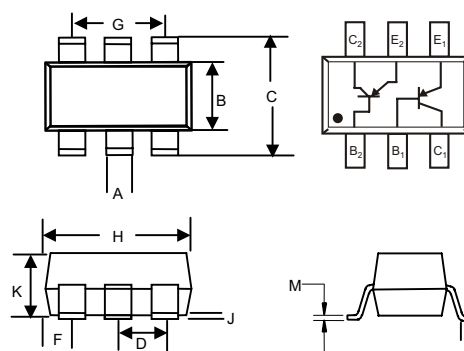

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.004	.012	0.10	0.30	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026		0.65Nominal		
F	.012	.016	0.30	0.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.039	0.90	1.00	
L	.010	.016	0.25	0.40	
M	.004	.016	0.10	0.25	

DMMT3906

SMALL SIGNAL CHARACTERISTICS

C_{obo}	Output Capacitance ($V_{CB}=-5.0Vdc$, $f=1.0MHz$, $I_E=0$)	---	4.5	pF
f_T	Current Gain-Bandwidth Product ($V_{CE}=-20Vdc$, $I_C=-10mAdc$, $f=100MHz$)	250	---	MHz

SWITCHING CHARACTERISTICS

t_d	Delay Time	$V_{CC}=-3.0Vdc$, $I_C=-10mAdc$,	---	35	ns
t_r	Rise Time	$V_{BE(off)}=0.5Vdc$, $I_{B1}=-1.0mAdc$	---	35	ns
t_s	Storage Time	$V_{CC}=-3.0Vdc$, $I_C=-10mAdc$,	---	225	ns
t_f	Fall Time	$I_{B1}=I_{B2}=-1.0mAdc$	---	75	ns

DMMT3906

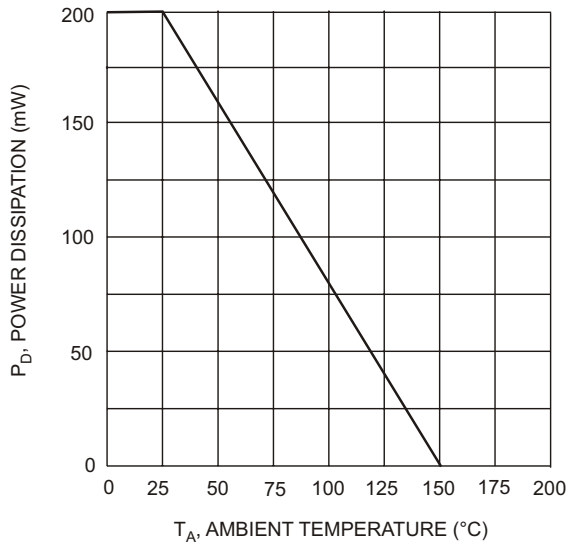


Fig. 1, Max Power Dissipation vs Ambient Temperature

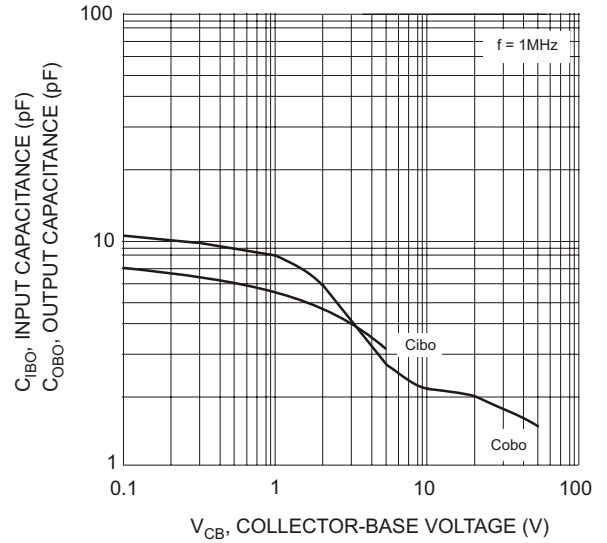


Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

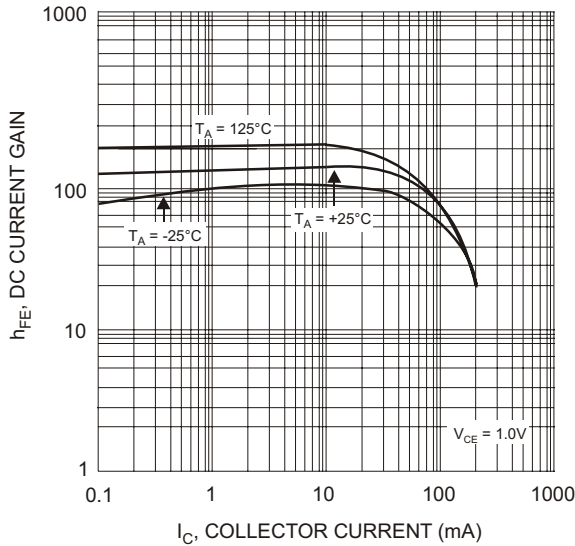


Fig. 3, Typical DC Current Gain vs Collector Current

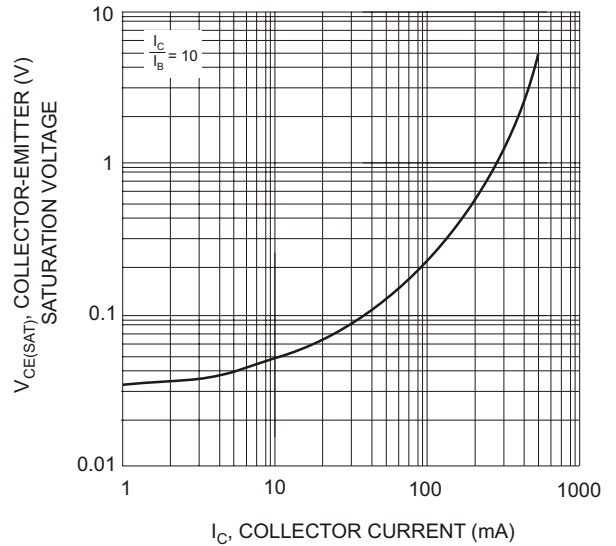


Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

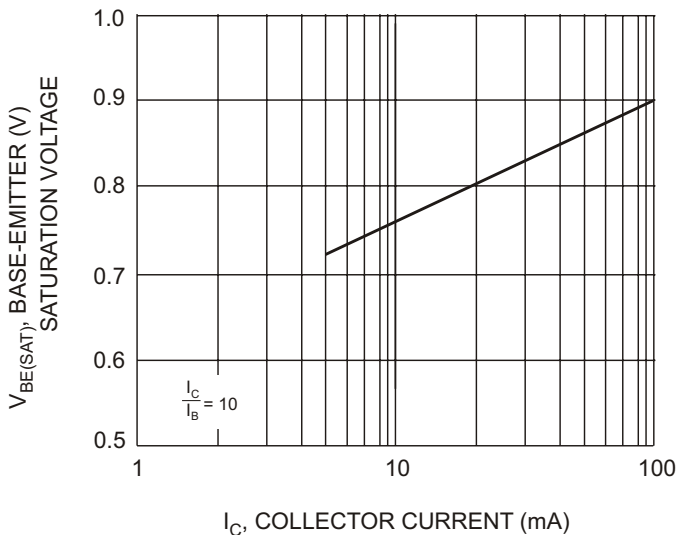


Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current



Micro Commercial Components

Ordering Information

Device (Part Number)-TP	Packing Tape&Reel;3Kpcs/Reel
----------------------------	---------------------------------

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.