



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MMDT3904

**200mW
Plastic-Encapsulate
Transistors**

Features

- Case Material: Molded Plastic. UL Flammability Classificatio Rating 94-0 and MSL Rating 1
- Collector Current: $I_C=0.2A$
- Marking: K6N
- Operating and Storage Junction Temperatures: $-55^{\circ}C$ to $150^{\circ}C$

Electrical Characteristics @ $25^{\circ}C$ Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1.0mA$, $I_E=0$)	40		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10\mu A$, $I_E=0$)	60		Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=10\mu A$, $I_C=0$)	5.0		Vdc
I_{EBO}	Emitter Cutoff Current ($V_{EB}=5V$, $I_C=0$)		50	nAdc
I_{CEO}	Collector Cutoff Current ($V_{CE}=30V$, $I_B=0$)		50	nAdc
I_{CBO}	Collect Cutoff Current ($V_{CB}=30V$, $I_E=0$)		50	nAdc

ON CHARACTERISTICS

h_{FE}	DC Current Gain* ($I_C=10mA$, $V_{CE}=1.0V$) ($I_C=50mA$, $V_{CE}=1.0V$)	100 60	300	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=50mA$, $I_B=5.0mA$)		0.3	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=50mA$, $I_B=5.0mA$)		0.95	Vdc



SMALL-SIGNAL CHARACTERISTICS

f_T	Current Gain-Bandwidth Product ($I_C=10mA$, $V_{CE}=20V$, $f=100MHz$)	300		MHz
C_{obo}	Output Capacitance ($V_{CB}=5.0V$, $I_E=0$, $f=1.0MHz$)		4.0	pF

SWITCHING CHARACTERISTICS

t_d	Delay Time	$(V_{CC}=3.0V$, $V_{BE}=0.5V$)	35	ns
t_r	Rise Time	$I_C=10mA$, $I_{B1}=1.0mA$	35	ns
t_s	Storage Time	$(V_{CC}=3.0V$, $I_C=10mA$)	200	ns
t_f	Fall Time	$I_{B1}=I_{B2}=1.0mA$	50	ns

SOT-363

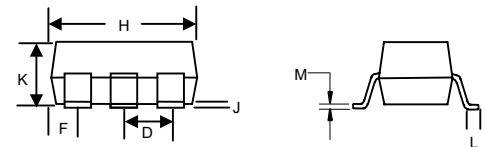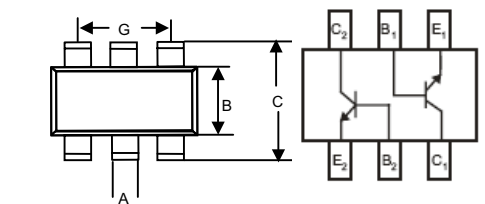

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.004	.012	0.10	0.30	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026		0.65Nominal		
F	.012	.016	0.30	0.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.039	0.90	1.00	
L	.010	.016	0.25	0.40	
M	.004	.016	0.10	0.25	



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.