

DDTA (R1≠R2 SERIES) E

PNP PRE-BIASED SMALL SIGNAL SURFACE MOUNT TRANSISTOR


Features

- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDTC)
- Built-In Biasing Resistors, R1≠R2
- **Lead Free Finish/RoHS Compliant (Note 1)**
- **"Green" Device (Note 2 and 3)**

Mechanical Data


- Case: SOT-523
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Terminal Connections: See Diagram
- Marking & Date Code Information: See Diagrams & Page 4
- Ordering Information: See Page 4
- Weight: 0.002 grams (approximate)

P/N	R1 (NOM)	R2 (NOM)	Marking
DDTA113ZE	1KΩ	10KΩ	P02
DDTA123YE	2.2KΩ	10KΩ	P05
DDTA123JE	2.2KΩ	47KΩ	P06
DDTA143XE	4.7KΩ	10KΩ	P09
DDTA143FE	4.7KΩ	22KΩ	P10
DDTA143ZE	4.7KΩ	47KΩ	P11
DDTA114YE	10KΩ	47KΩ	P14
DDTA114WE	10KΩ	4.7KΩ	P15
DDTA124XE	22KΩ	47KΩ	P18
DDTA144VE	47KΩ	10KΩ	P21
DDTA144WE	47KΩ	22KΩ	P22

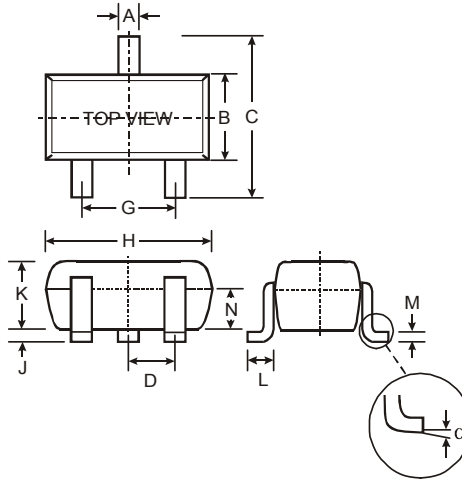


SOT-523			
Dim	Min	Max	Typ
A	0.15	0.30	0.22
B	0.75	0.85	0.80
C	1.45	1.75	1.60
D	—	—	0.50
G	0.90	1.10	1.00
H	1.50	1.70	1.60
J	0.00	0.10	0.05
K	0.60	0.80	0.75
L	0.10	0.30	0.22
M	0.10	0.20	0.12
N	0.45	0.65	0.50
α	0°	8°	—

All Dimensions in mm

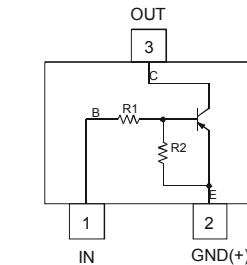

Schematic and Pin Configuration

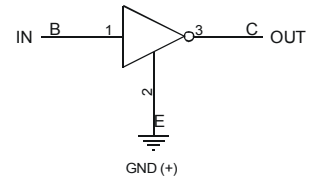

Equivalent Inverter Circuit

Maximum Ratings @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage, (2) to (3)	V _{CC}	-50	V
Input Voltage, (1) to (2)	V _{IN}	DDTA113ZE	+5 to -10
		DDTA123YE	+5 to -12
		DDTA123JE	+5 to -12
		DDTA143XE	+7 to -20
		DDTA143FE	+6 to -30
		DDTA143ZE	+5 to -30
		DDTA114YE	+6 to -40
		DDTA114WE	+10 to -30
		DDTA124XE	+10 to -40
		DDTA144VE	+15 to -40
		DDTA144WE	+10 to -40
Output Current	I _O	DDTA113ZE	-100
		DDTA123YE	-100
		DDTA123JE	-100
		DDTA143XE	-100
		DDTA143FE	-100
		DDTA143ZE	-100
		DDTA114YE	-70
		DDTA114WE	-100
		DDTA124XE	-50
		DDTA144VE	-30
		DDTA144WE	-30
Output Current	I _C (Max)	-100	mA

- Notes:
1. No purposefully added lead.
 2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 3. Product manufactured with Date Code UO (week 40, 2007) and newer are built with Green Molding Compound. Product manufactured prior to Date Code UO are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Thermal Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Power Dissipation	P_d	150	mW
Thermal Resistance, Junction to Ambient Air (Note 4)	$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_j, T_{STG}	-55 to +150	$^\circ\text{C}$

Notes: 4. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition	
Input Voltage	$V_{I(off)}$	DDTA113ZE	-0.3			V	$V_{CC} = 5V, I_O = 100\mu\text{A}$
		DDTA123YE	-0.3				
		DDTA123JE	-0.5				
		DDTA143XE	-0.3				
		DDTA143FE	-0.3				
		DDTA143ZE	-0.5	—	—		
		DDTA114YE	-0.3				
		DDTA114WE	-0.8				
		DDTA124XE	-0.4				
		DDTA144VE	-1.0				
	DDTA144WE	-0.8					
	$V_{I(on)}$	DDTA113ZE			-3.0	V	$V_O = -0.3V, I_O = -20\text{mA}$ $V_O = -0.3V, I_O = -20\text{mA}$ $V_O = -0.3V, I_O = -5\text{mA}$ $V_O = -0.3V, I_O = -20\text{mA}$ $V_O = -0.3V, I_O = -3\text{mA}$ $V_O = -0.3V, I_O = -5\text{mA}$ $V_O = -0.3V, I_O = -1\text{mA}$ $V_O = -0.3V, I_O = -2\text{mA}$ $V_O = -0.3V, I_O = -2\text{mA}$ $V_O = -0.3V, I_O = -2\text{mA}$ $V_O = -0.3V, I_O = -2\text{mA}$
		DDTA123YE			-3.0		
		DDTA123JE			-1.1		
		DDTA143XE			-2.5		
		DDTA143FE			-1.3		
		DDTA143ZE	—	—	-1.3		
		DDTA114YE			-1.4		
		DDTA114WE			-3.0		
DDTA124XE				-2.5			
Output Voltage	$V_{O(on)}$		—	-0.1	V	$I_O/I_I = -5\text{mA}/-0.25\text{mA}$ DDTA123E $I_O/I_I = -5\text{mA}/-0.25\text{mA}$ DDTA143E $I_O/I_I = -5\text{mA}/-0.25\text{mA}$ DDTA114E $I_O/I_I = -10\text{mA}/-0.5\text{mA}$ All Others	
				-0.3			
Input Current	I_I	DDTA113ZE			mA	$V_I = -5V$	
		DDTA123YE					-7.2
		DDTA123JE					-3.8
		DDTA143XE					-3.6
		DDTA143FE					-1.8
		DDTA143ZE	—	—			-1.8
		DDTA114YE					-1.8
		DDTA114WE					-0.88
		DDTA124XE					-0.88
		DDTA144VE					-0.36
		DDTA144WE					-0.16
Output Current	$I_{O(off)}$	—	—	-0.5	μA	$V_{CC} = -50V, V_I = 0V$	
DC Current Gain	G_I	DDTA113ZE			—	$V_O = -5V, I_O = -10\text{mA}$	
		DDTA123YE					-33
		DDTA123JE					-33
		DDTA143XE					-80
		DDTA143FE					-30
		DDTA143ZE					-68
		DDTA114YE					-80
		DDTA114WE					-68
		DDTA124XE					-24
		DDTA144VE					-68
		DDTA144WE					-33
Input Resistor Tolerance	ΔR_1	-30	—	+30	%	—	
Resistance Ratio Tolerance	$\Delta R_2/R_1$	-20	—	+20	%	—	
Gain-Bandwidth Product*	f_T	—	250	—	MHz	$V_{CE} = -10V, I_E = 5\text{mA}, f = 100\text{MHz}$	

* Transistor – For Reference Only

TYPICAL CURVES - DDTA123JE

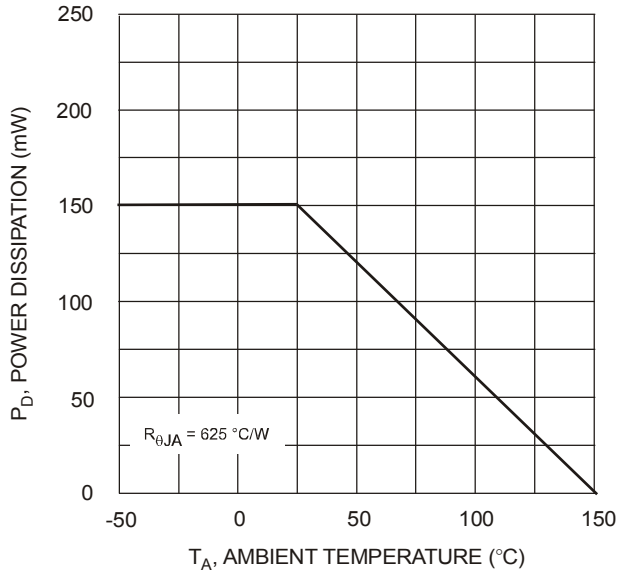


Fig. 1 Derating Curve

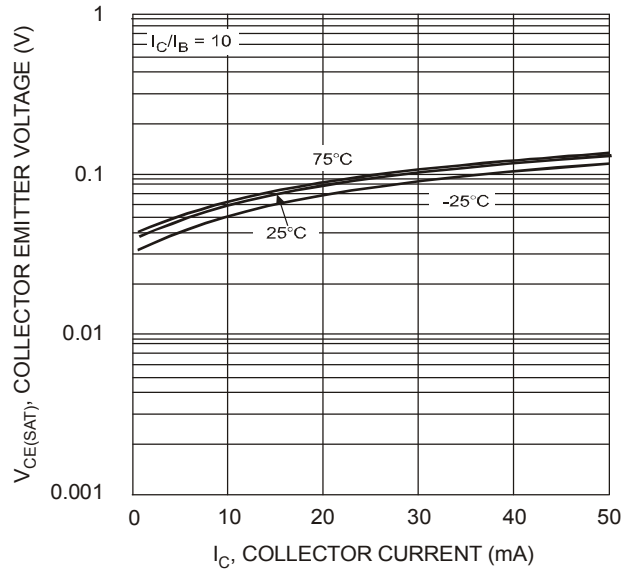


Fig. 2 $V_{CE(SAT)}$ vs. I_C

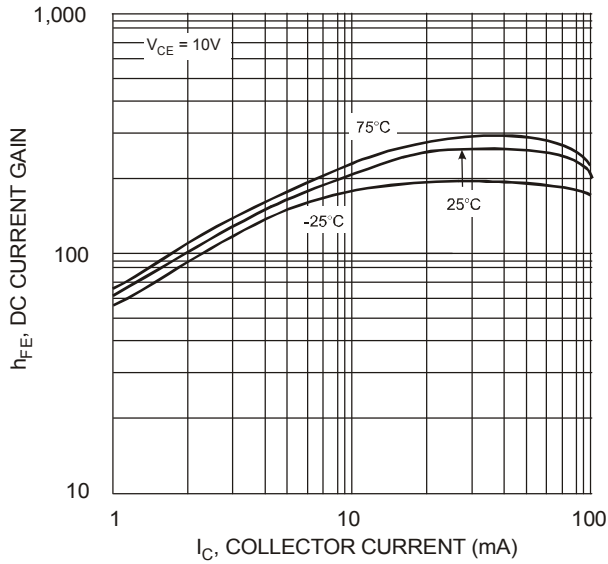


Fig. 3 DC Current Gain

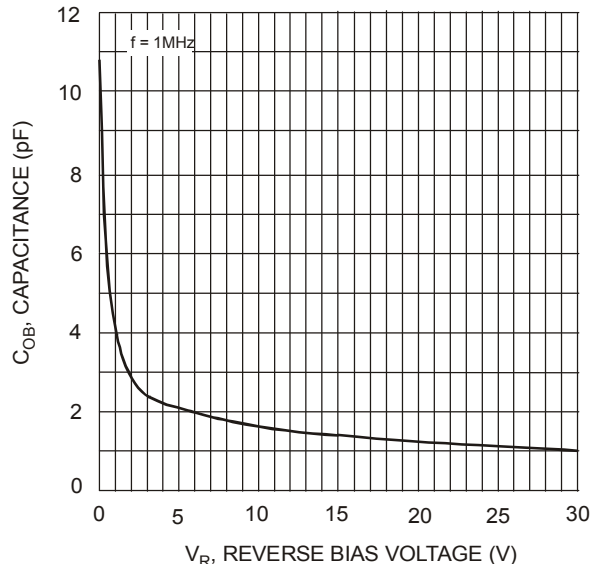


Fig. 4 Output Capacitance

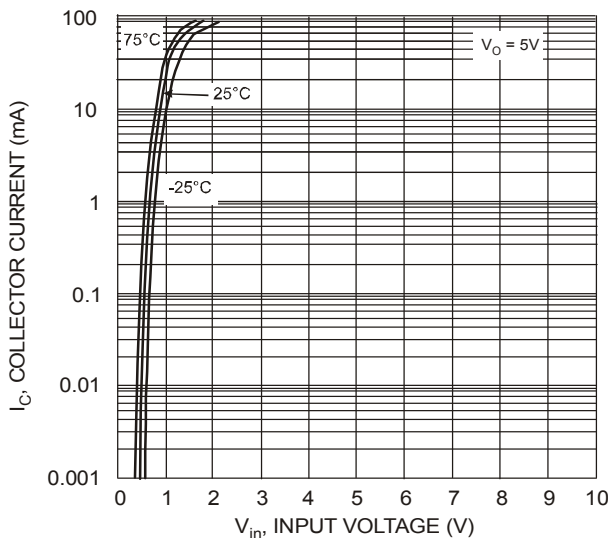


Fig. 5 Collector Current vs. Input Voltage

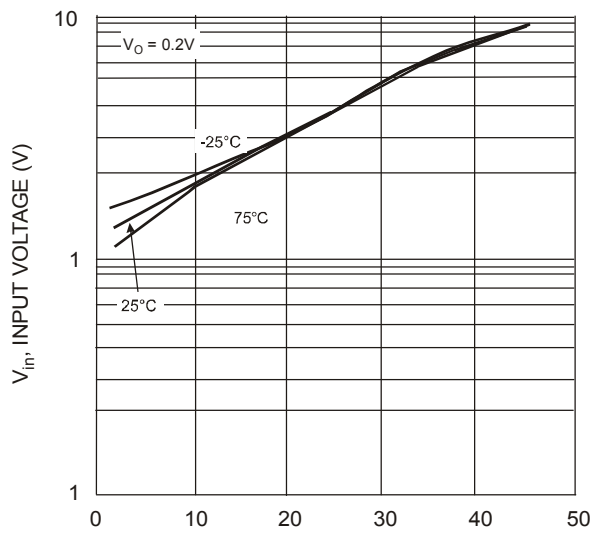



Fig. 6 Input Voltage vs. Collector Current

Ordering Information (Note 5)

Device	Packaging	Shipping
DDTA113ZE-7-F	SOT-523	3000/Tape & Reel
DDTA123YE-7-F	SOT-523	3000/Tape & Reel
DDTA123JE-7-F	SOT-523	3000/Tape & Reel
DDTA143XE-7-F	SOT-523	3000/Tape & Reel
DDTA143FE-7-F	SOT-523	3000/Tape & Reel
DDTA143ZE-7-F	SOT-523	3000/Tape & Reel
DDTA114YE-7-F	SOT-523	3000/Tape & Reel
DDTA114WE-7-F	SOT-523	3000/Tape & Reel
DDTA124XE-7-F	SOT-523	3000/Tape & Reel
DDTA144VE-7-F	SOT-523	3000/Tape & Reel
DDTA144WE-7-F	SOT-523	3000/Tape & Reel

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



Xxx = Product Type Marking Code (See Page 1, e.g. P02 = DDTA113ZE)
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

Year	2005	2006	2007	2008	2009	2010	2011	2012
Code	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.