



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# MMBTA05 THRU MMBTA06

## Features


- Epitaxial Planar Die Construction
- Complementary PNP Types Available (MMBTA55/MMBTA56)
- Ideal for Medium Power Amplification and Switching.
- Case Material: Molded Plastic. UL Flammability Classification Rating 94-0 and MSL Rating 1
- Marking: MMBTA05:1H/B05  
MMBTA06:1GM/B06

## NPN Small Signal General Purpose Amplifier Transistors

## Maximum Ratings

Symbol	Rating	Rating	Unit
$V_{CEO}$	Collector-Emitter Voltage MMBTA05 MMBTA06	60 80	V
$V_{CBO}$	Collector-Base Voltage MMBTA05 MMBTA06	60 80	V
$V_{EBO}$	Emitter-Base Voltage	4.0	V
$I_C$	Collector Current-Continuous	500	mA
$P_D$	Power Dissipation*	300	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	357	K/W
$T_J$	Operating Junction Temperature	-55 to +150	°C
$T_{STG}$	Storage Temperature	-55 to +150	°C

## SOT-23

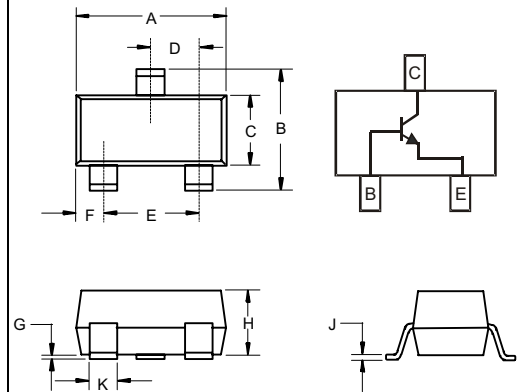

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

### OFF CHARACTERISTICS

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ( $I_C=1.0\text{mA}$ , $I_B=0$ ) MMBTA05 MMBTA06	60 80	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_E=100\mu\text{A}$ , $I_C=0$ )	4.0	---	Vdc
$I_{CBO}$	Collector Cutoff Current ( $V_{CB}=60\text{Vdc}$ , $I_E=0$ ) MMBTA05 ( $V_{CB}=80\text{Vdc}$ , $I_E=0$ ) MMBTA06	---	0.1	$\mu\text{A}$
$I_{CES}$	Emitter Cutoff Current ( $V_{CE}=60\text{Vdc}$ , $I_B=0$ ) MMBTA05 ( $V_{CE}=80\text{Vdc}$ , $I_B=0$ ) MMBTA06	---	0.1	$\mu\text{A}$


### ON CHARACTERISTICS

$h_{FE}$	DC Current Gain ( $V_{CE}=1.0\text{Vdc}$ , $I_C=10\text{mA}$ ) ( $V_{CE}=1.0\text{Vdc}$ , $I_C=100\text{mA}$ )	100 100	---	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ( $I_C=100\text{mA}$ , $I_B=10\text{mA}$ )	---	0.25	Vdc
$V_{BE(on)}$	Base-Emitter On Voltage ( $I_C=100\text{mA}$ , $I_B=10\text{mA}$ )	---	1.2	Vdc
$f_T$	Current-Gain—Bandwidth Product ( $I_C=10\text{mA}$ , $V_{CE}=2.0\text{Vdc}$ , $f=100\text{MHz}$ )	100	---	MHz

\* Valid provided that terminals are kept at ambient temperature..

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

## Suggested Solder Pad Layout

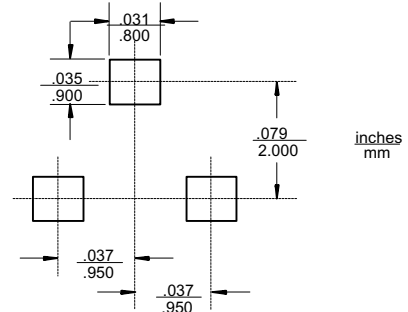



Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.