




# QK08A Series Crossflow Blower

502... 641mm x Ø 92mm

- AC blower with single phase motor. 90° or 180° air flow. Ball bearings and terminals. Max ambient temperature of 40 C.
- Wide, even air flow distribution. "V" shaped guide vane suppresses noise.
- Fan propeller of aluminium and air duct housing of sheet steel.
- Rotational direction CW looking at rotor.
- UL, CSA, VDE approvals on some models. Please contact application engineering

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
QK08A-2/203530	6	620	115	60	290	76	40	Ball	Leads	22	10.0
QK08A-2/207886	5	445	115	60	175	74	40	Ball	Leads	12	10.0
QK08A-4/105638	1	250	230	50/60	68	60	40	Ball	Leads	2	13.0
QK08A-4/208443	2	340	230	60	66	60	40	Ball	Leads	1.5	10.0
QK08A-2/208135	4	410	230	60	210	74	40	Ball	Leads	4	10.0
QK08A-2/205828	6	620	230	60	290	76	40	Ball	Leads	6	11.0
QK08A-2/205737	3	670	230	60	290	76	40	Ball	Leads	6	11.0

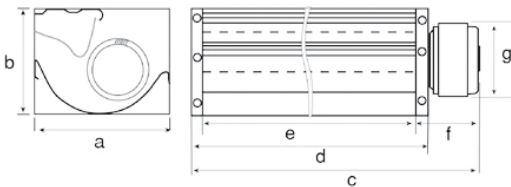

PART NUMBER	a	b	c	d	e	f	g
.../105638	6.30 (160)	5.12 (130)	17.60 (447)	15.35 (390)	13.78 (350)	2.95 (75)	3.62 (92)
.../208443	6.30 (160)	5.12 (130)	23.50 (597)	21.26 (540)	19.69 (500)	2.95 (75)	3.62 (92)
.../208135	6.30 (160)	5.12 (130)	18.39 (467)	15.35 (390)	13.78 (350)	3.94 (100)	3.62 (92)
.../203530	7.87 (200)	6.89 (175)	25.20 (640)	22.44 (570)	19.69 (500)	4.09 (104)	3.62 (92)
.../205828	6.30 (160)	5.12 (130)	25.24 (640)	22.44 (570)	19.69 (500)	4.09 (104)	3.62 (92)
.../207886	6.30 (160)	5.12 (130)	18.39 (467)	15.35 (390)	13.78 (350)	3.94 (100)	3.62 (92)
.../205737	6.30 (160)	5.12 (130)	25.20 (640)	22.44 (570)	19.69 (500)	4.09 (104)	3.62 (92)

