


Data Sheet

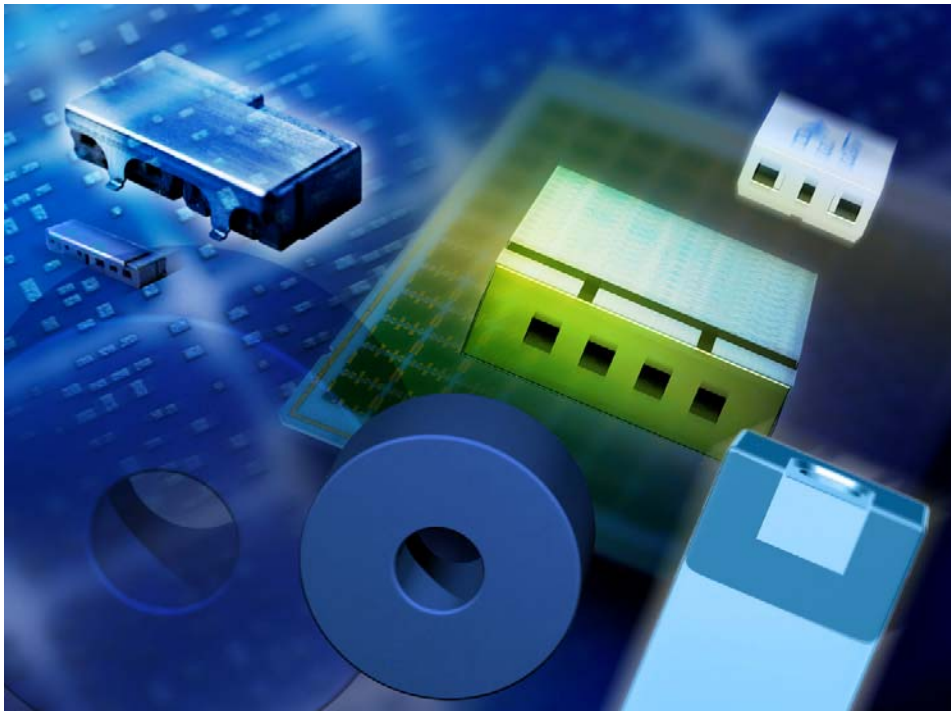

**Application**

- RF filter for WLL (Wireless Local Loop)

**Features**

- SMD filter consisting of coupled resonators with stepped impedances
- $MgTiO_3-CaTiO_3$  ( $\epsilon_r = 21 / TC_f = 0 \pm 10$  ppm/K) with a coating of copper ( $10\mu m$ ) and tin ( $>5\mu m$ )
- Excellent reflow solderability, no migration effect due to copper/tin metallization
- ESD insensitivity and ESD protecting due to filter characteristics


**Index**

- Page 2
  - Component drawing
  - Footprint
- Page 3
  - Characteristics
  - Maximum ratings
  - Typical passband characteristic
- Page 4
  - Processing information
  - Soldering requirements
  - Delivery mode

ISSUE DATE	05.07.04	ISSUE	P1	PUBLISHER	SAW MWC PD	PAGE	1/4
------------	----------	-------	----	-----------	------------	------	-----


Data Sheet

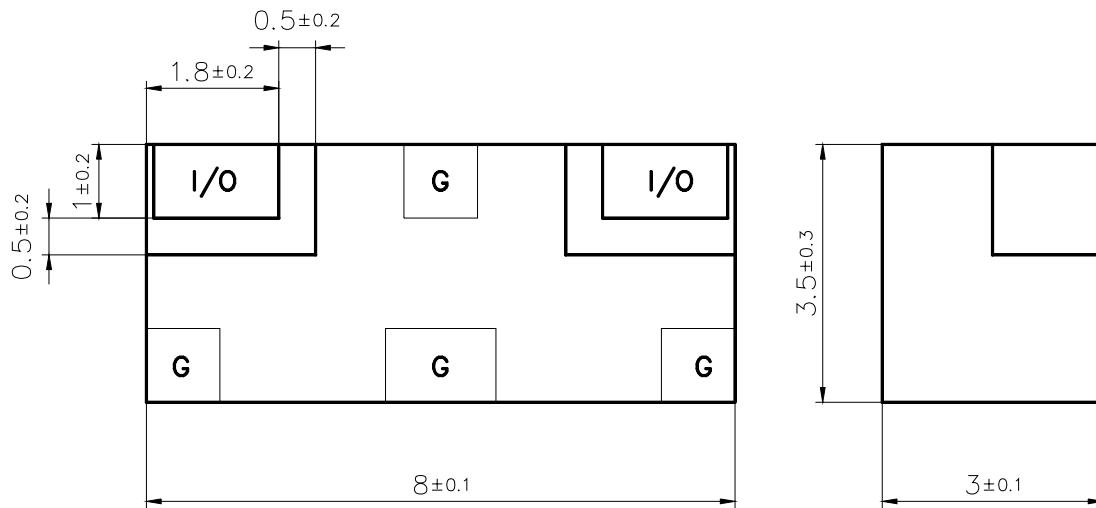

Component drawing



View from below onto the solder terminals and view from beside

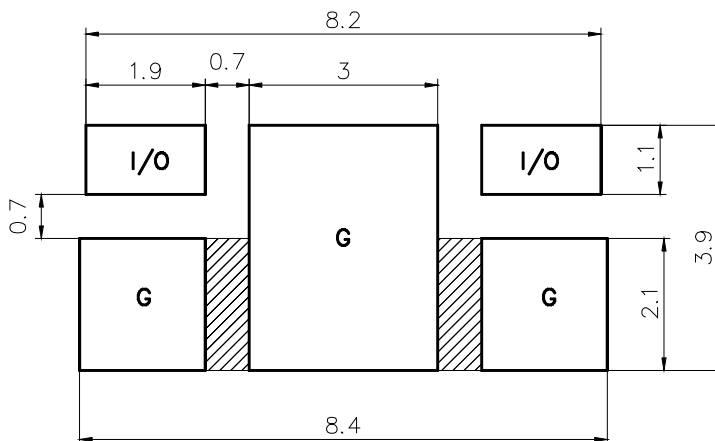Recommended Footprint



-  solder pads
-  ground area below solder resist with vias to second ground layer
- I/O** connected to lines with an impedance of 50 Ohm

**Standard condition** FR4 material  
 permittivity : 4.4  
 preferred thickness : 0.3  
 Vias: Ø0.3mm / mm<sup>2</sup>  
 For other thickness correlation might be necessary

ISSUE DATE	05.07.04	ISSUE	P1	PUBLISHER	SAW MWC PD	PAGE	2/4
------------	----------	-------	----	-----------	------------	------	-----

Data Sheet


Characteristics

		min.	typ.	max.	
Center frequency	$f_C$	-	3450.0	-	MHz
Insertion loss	$\alpha_{IL}$		1.6	2.0	dB
Passband	$B$	120			MHz
Amplitude ripple (peak - peak) at any 10MHz BW	$\Delta\alpha$			0.4	dB
Standing wave ratio	$SWR$		1.5	2.0	
Impedance	$Z$		50		$\Omega$
Power	$P$			1.0	W
Attenuation	$\alpha$				
	at 2944 to 3044 MHz	45	51		dB
	at 3800 to 4200 MHz	20	29		dB

Maximum ratings

IEC climatic category (IEC 68-1)		- 40/+ 90/56	
Operating temperature	$T_{Op}$	-40 / + 85	$^{\circ}C$

Typical passband characteristic

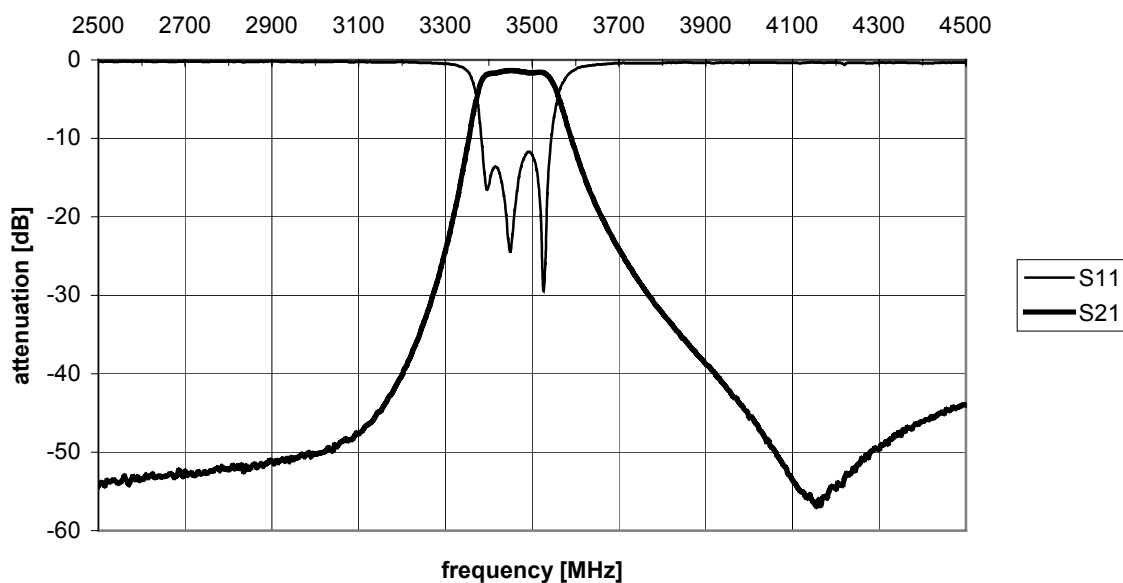

Data Sheet


Processing information

- Wettability to IEC 68-2-58:  $\geq 75\%$  (after aging)

Soldering Requirements


	Profile for eutectic SnPb solder paste	Profile for leadfree solder paste	
Soldering type	reflow	reflow	
Maximum soldering temperature (measuring point on top surface of the component)	235 (max. 2 sec.) 225 (max. 10 sec.)	260 (max. 2 sec.) 250 (max. 10 sec.)	$^{\circ}\text{C}$ $^{\circ}\text{C}$

Recommended soldering conditions (infrared):

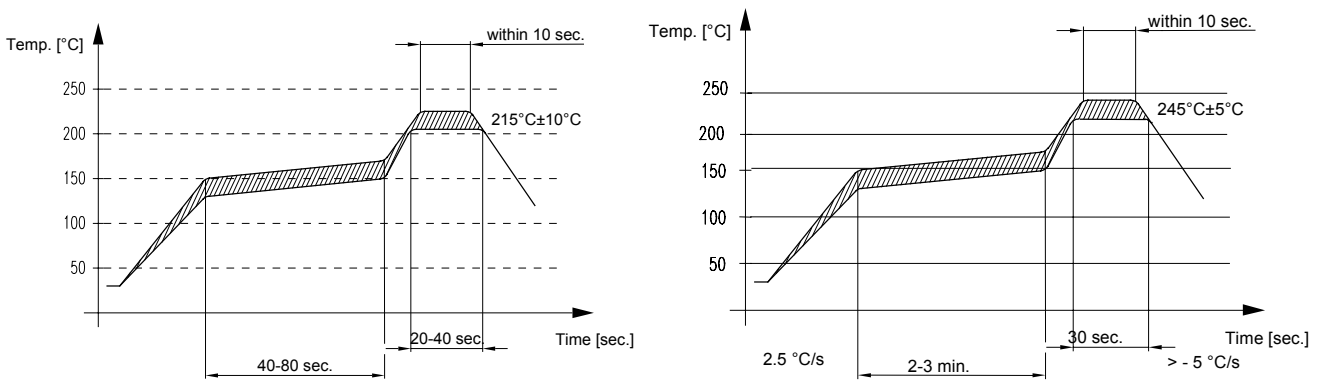

Delivery mode

- Blister tape acc. to IEC 286-3, PS, grey
- Pieces/tape: 2000

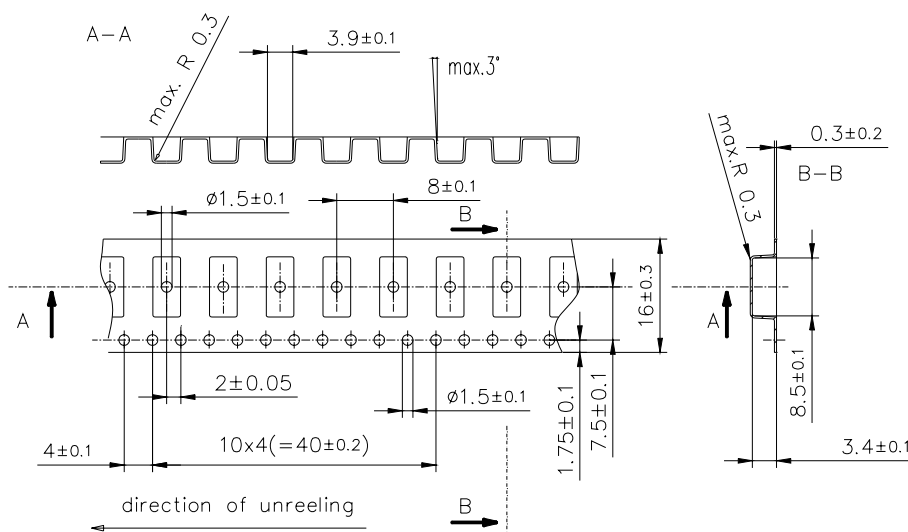

© EPCOS AG 2001. All Rights Reserved. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this data sheet describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

ISSUE DATE	05.07.04	ISSUE	P1	PUBLISHER	SAW MWC PD	PAGE	4/4
------------	----------	-------	----	-----------	------------	------	-----