


UNCONTROLLED DOCUMENT

CM1922X330R-10

PHYSICAL DIMENSIONS:

A	4.70 [.185]	+ 0.25 [.010]
B	5.60 [.220]	+ 0.25 [.010]
C	2.85 [.112]	+ 0.25 [.010]
D	2.24 [.088]	+ 0.23 [.009]
E	0.58 [.023]	+ 0.18 [.007]

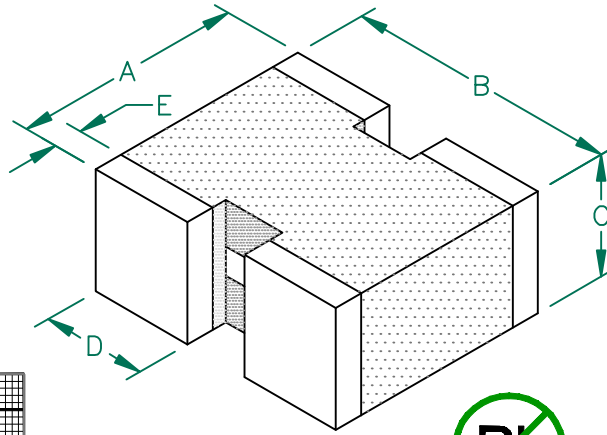


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	33	
Minimum	25	
Maximum	41	10,000 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 2500 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. U.S. PATENT 6,288,626 SHOULD APPEAR ON THE LABEL OF EACH REEL OF PACKAGED PARTS.
4. TERMINATION FINISH IS 100% TIN.


Z vs. FREQUENCY (C,N,O)

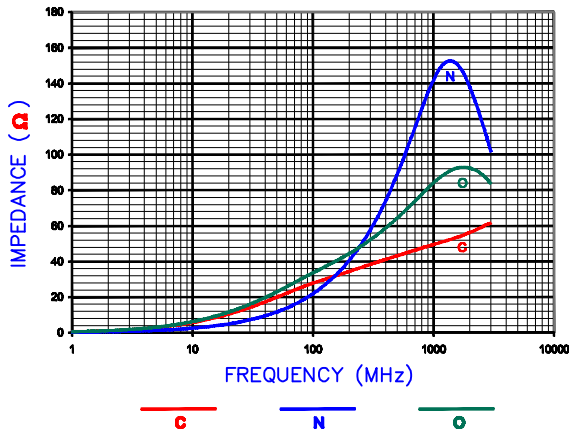


Z, R, XL vs. FREQUENCY

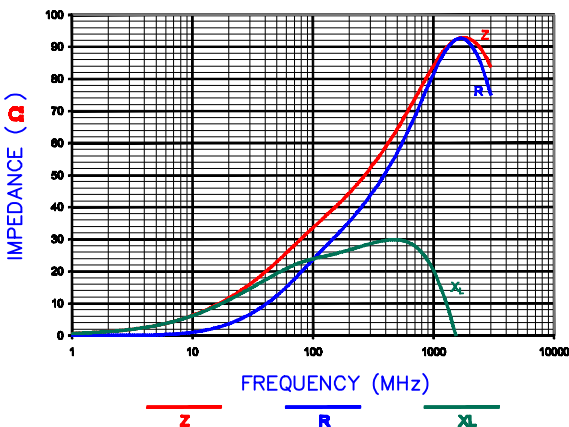

LAND PATTERNS FOR REFLOW SOLDERING

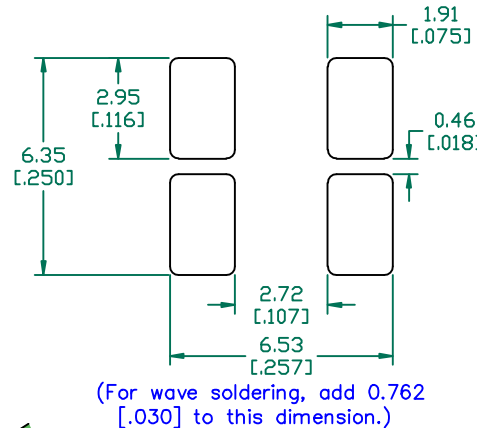

RECOMMENDED SOLDERING CONDITIONS

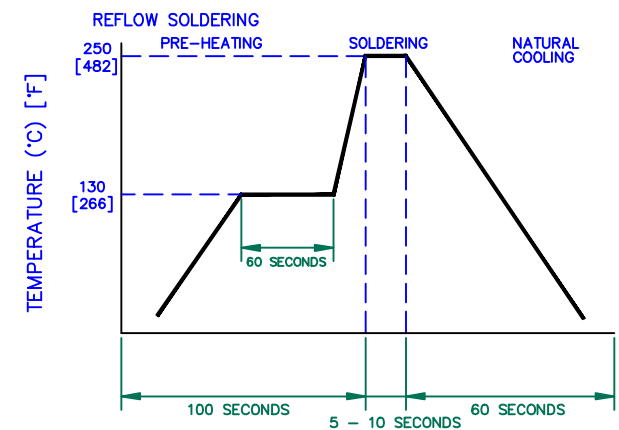

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.				
				PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
				CM1922X330R-10		B	CO-FIRE	JRK
B	UPDATE COMPANY LOGO, ADD ROHS SYMB	05/17/07	JRK	DATE:	04/27/04	SCALE:	NTS	SHEET:
A	ORIGINAL DRAFT	04/27/04	JRK	CAD #	CM1922X330R-10-B	TOOL #	-	2 of 2
REV	DESCRIPTION	DATE	INT					