


CM2722R201R-10



PHYSICAL DIMENSIONS:

A	6.99 [.275]	± 0.10 [.004]
B	5.72 [.225]	± 0.10 [.004]
B ₁	6.73 [.265]	MAX
C	9.53 [.375]	± 0.15 [.006]
C ₁	10.31 [.406]	MAX.
D	2.41 [.095]	± 0.08 [.003]
E	0.89 [.035]	± 0.13 [.005]
E ₁	1.91 [.075]	± 0.13 [.005]
WIRE:		
T ₁	1.91 [.075]	± 0.25 [.010]
T ₂	0.38 [.015]	± TYP.
T ₃	0.38 [.015]	± TYP.


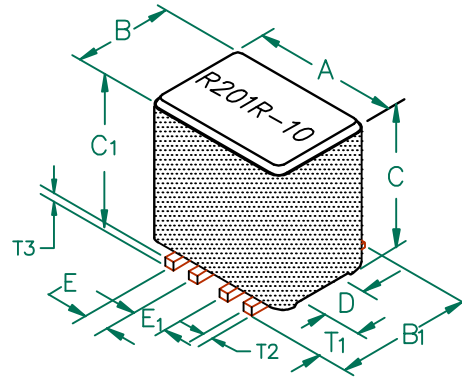


ELECTRICAL CHARACTERISTICS:		
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	200	
Minimum	160	
Maximum	-	0.02
		5,000 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS, 13" REELS 500 PCS per REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION# CART2722-2P.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.

Z vs. FREQUENCY (C,O,N)

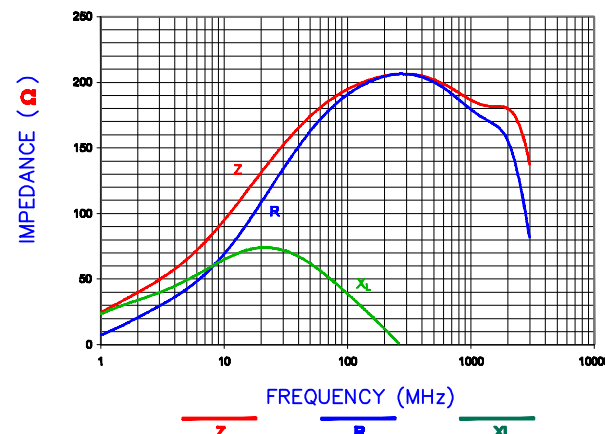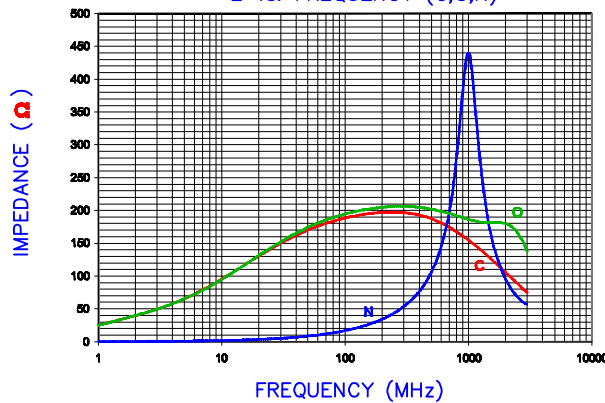


LAND PATTERNS FOR REFLOW SOLDERING

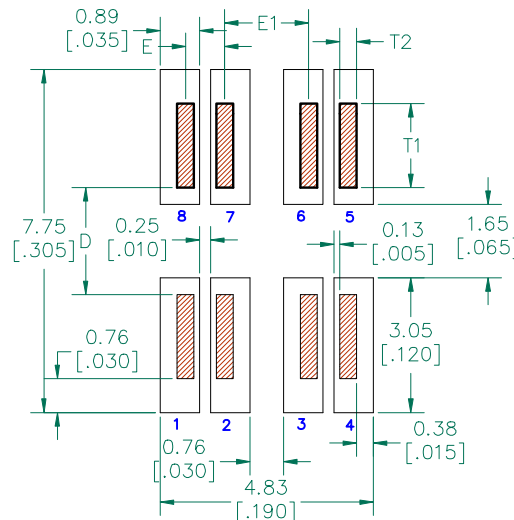

UNCONTROLLED DOCUMENT

RECOMMENDED SOLDERING CONDITIONS

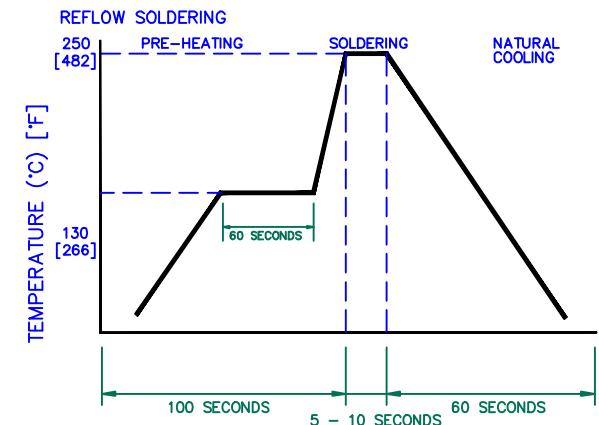

DIMENSIONS ARE IN mm (INCHES).		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.	
PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
CM2722R201R-10	B	ASSEMBLY	JRK
B UPDATE COMPANY LOGO & ROHS SYMB.	11/14/07	JRK	DATE: 06/01/04
A ORIGINAL DRAFT	6/01/04	JRK	SCALE: NTS
REV	DESCRIPTION	DATE	INT
		CM2722R201R-10-B-2	TOOL # H0275-2
		SHEET: 2 of 3	