


# CM2545X171B-10



## PHYSICAL DIMENSIONS:

A	6.30	[.248]	±	0.10	[.004]
B	11.38	[.448]	±	0.18	[.007]
C	9.32	[.367]	±	0.18	[.007]
D	7.62	[.300]	±	0.10	[.004]
E	2.54	[.100]	±	0.13	[.005]
T <sub>1</sub>	3.43	[.135]	±	0.25	[.010]
T <sub>2</sub>	0.64	[.025]	±	TYP.	



**UNCONTROLLED DOCUMENT**

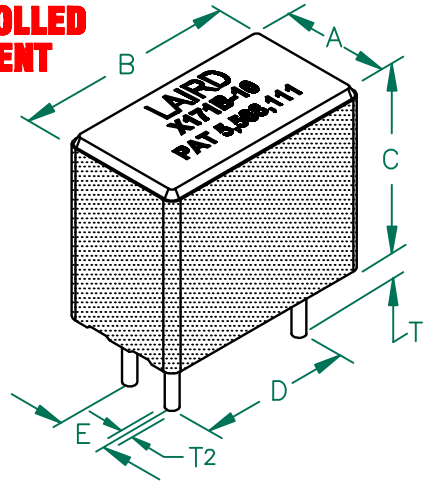


## ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	170	
Minimum	128	
Maximum	212	10,000 mA


- NOTES: UNLESS OTHERWISE SPECIFIED
1. BULK PACKED, 1260 per CASE.
  2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
  3. TERMINATION FINISH IS 100% TIN.
  4. THIS PART HAS NO PIN POLARITY.

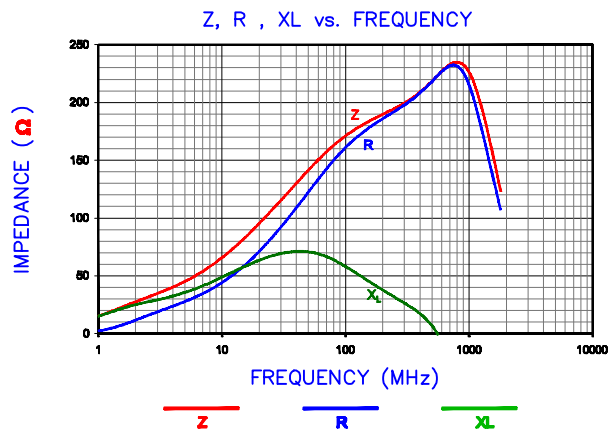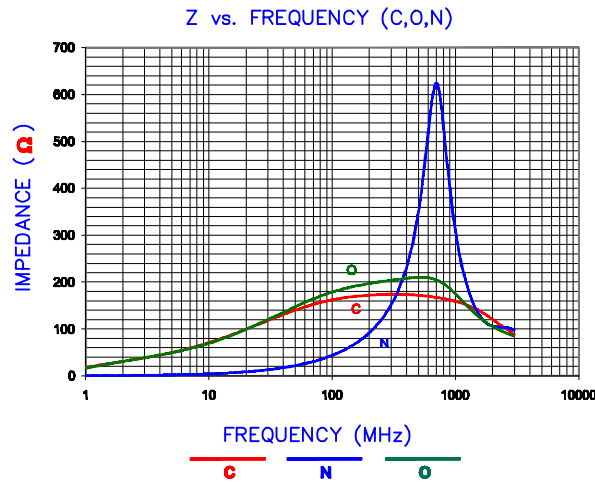

## EQUIVALENT CIRCUIT



## HOLE PATTERN FOR WAVE SOLDERING

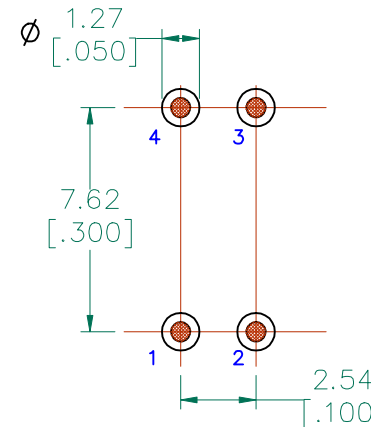

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
C	UPDATE COMPANY LOGO UPDATE ROHS SYMBOL AND KAPTON LABEL ADD EC	11/05/08	JRK	PROJECT/PART NUMBER:	CM2545X171B-10	REV	C
B	UPDATE COMPANY LOGO	05/17/07	JRK	DATE:	5/26/04	SCALE:	NTS
A	ORIGINAL DRAFT	5/26/04	JRK	CAD #	CM2545X171B-10-C-2	TOOL #	H0249-600
REV	DESCRIPTION	DATE					2 of 3

