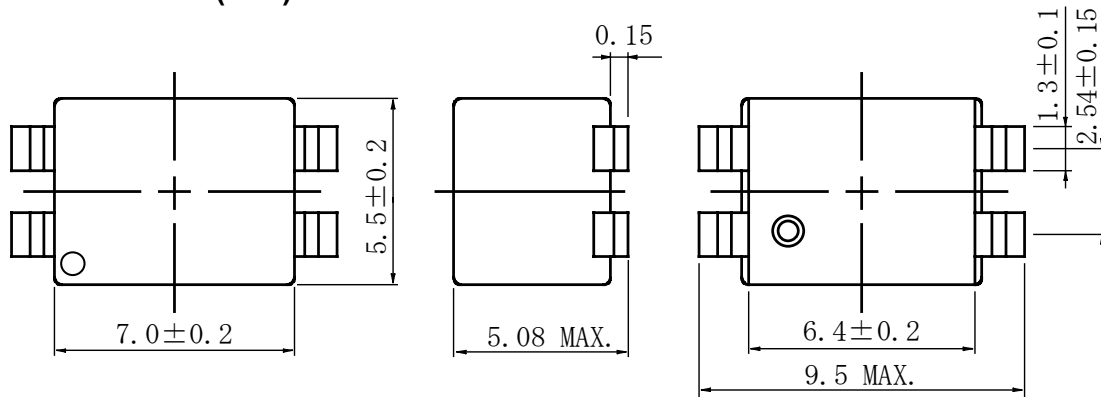


Type: CPFC74
◆ Product Description

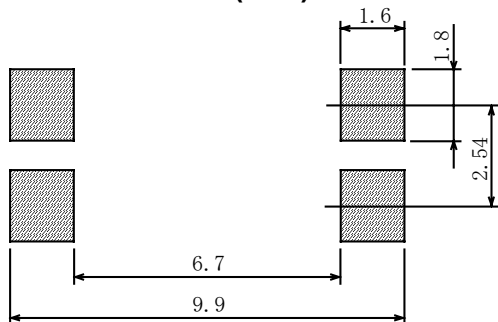
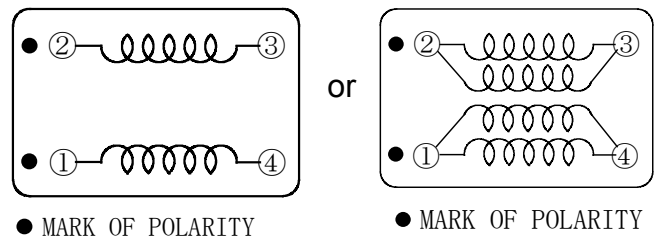
- 9.5×5.7mm Max.(L×W), 5.1mm Max. Height .

◆ Feature

- Ideally used in CAN BUS ,AV,OA equipment.
- RoHS Compliance


◆ Dimensions (mm)


* Dimension does not include solder used on coil.

◆ Land Pattern (mm)

◆ Schematics (Bottom)

◆ Specification (For CAN bus)

| Part Name. | Stamp | Impedance (Ω) (L1,L2 Parallel) (10~100MHz) | Insulation Resistance (MΩ)(Coil-Coil) (DC80V 1min) | Withstanding Voltage (coil-coil) (5sec) | D.C.R. (Ω) (1-2)at 20°C (3-4) short ※ |
|-----------------|-------|--|---|---|--|
| CPFC74NP-CB1ØM4 | C10M | 1000 MIN. | 100 MIN. | 200V DC | 0.6 MAX. |
| CPFC74NP-CBØ8M6 | C08M | 800 MIN. | 100 MIN. | 200V DC | 0.5 MAX. |

※ D.C.R. is measured by 2 lines as series because impedance will be deteriorated when D.C.R. is measured by 1 line.

Type: CPFC74
◆ Specification (For Power supply)

| Part Name. | Stamp | Impedance (Ω) (L1,L2 Parallel) | Insulation Resistance (MΩ)(Coil-Coil) (DC100V 1min.) | Withstanding Voltage (Coil-Coil) (5sec) | D.C.R. (mΩ) (1-2)at 20°C (3-4) Short ※2 | Rated Current (1-2)(A) (3-4) Short ※1 |
|--------------------|-------|-----------------------------------|---|--|--|---|
| CPFC74NP-PS1ØH2A15 | P15H | 700 MIN. (100 MHz) | 10 MIN. | D.C.125V | 120 | 1.5 |
| CPFC74NP-PSØ2H2A2Ø | P20H | 200 MIN. (20~300MHz) | 10 MIN. | D.C.125V | 120 | 2.0 |
| CPFC74NP-PSØ3H2A25 | P25H | 300 MIN. (160 MHz) | 10 MIN. | D.C.125V | 120 | 2.5 |
| CPFC74NP-PSØ1H2A3Ø | P30H | 100 MIN. | 10 MIN. | D.C.125V | 60 | 3.0 |

※1: Rated current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$.($T_a=20^{\circ}\text{C}$).

※2: D.C.R is measured by 2 lines as series because impedance will be deteriorated when D.C.R. is measured by 1 line.