


LI0805H121R-10

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:

A	2.00 [.079]	±	0.20 [.008]
B	1.25 [.049]	±	0.20 [.008]
C	0.90 [.035]	±	0.20 [.008]
D	0.51 [.020]	±	0.25 [.010]

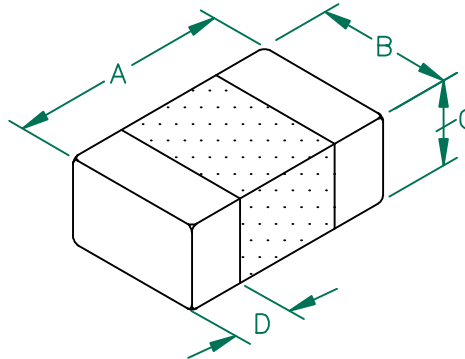


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	120		
Minimum	90		
Maximum	150	0.15	800 mA




NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

LAND PATTERNS FOR REFLOW SOLDERING

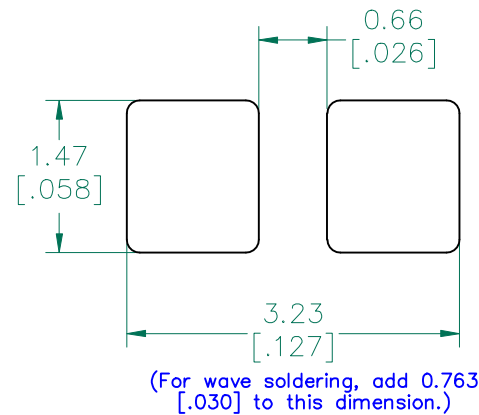

RECOMMENDED SOLDERING CONDITIONS

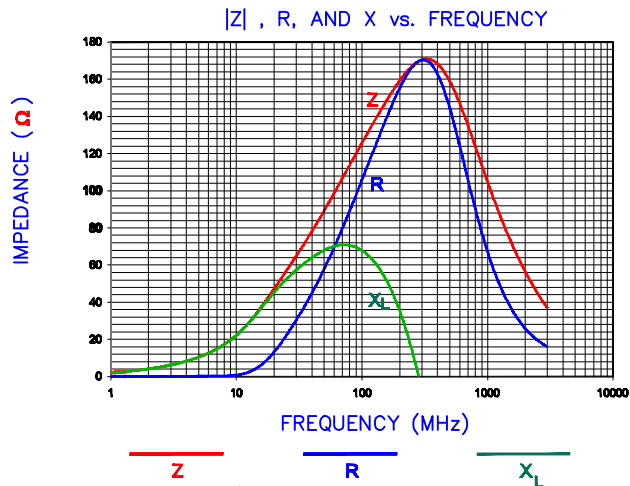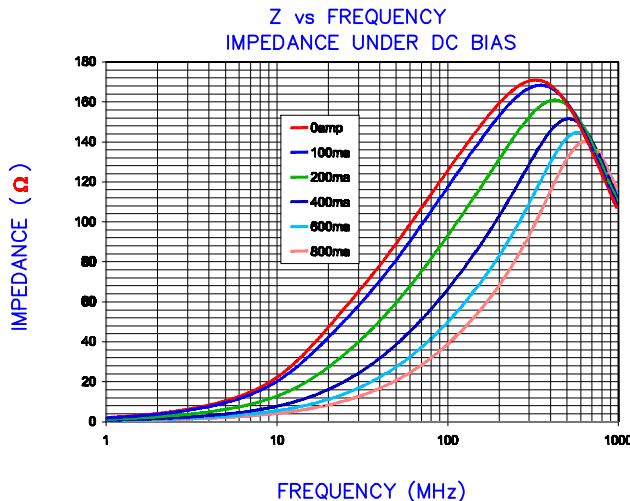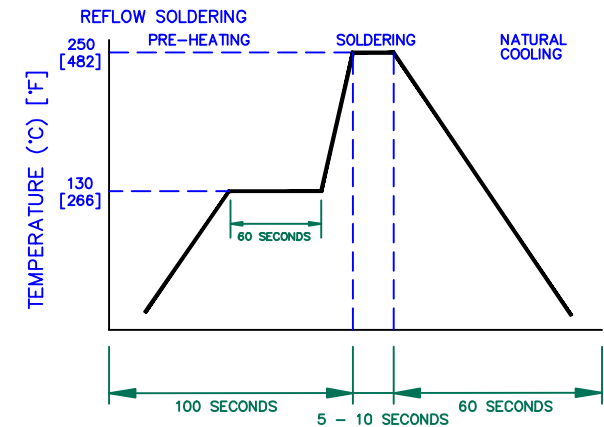

DIMENSIONS ARE IN mm [INCHES]					This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
PROJECT/PART NUMBER:					REV	PART TYPE:	DRAWN BY:	
C UPDATE COMPANY LOGO ADD ROHS SYM 07/21/08 JRK					LI0805H121R-10	C	CO-FIRE	JRK
B ADD DC BIAS CURVE UPDATE ZRX CURVE 04/07/03 JRK					DATE:	SCALE:	SHEET:	
A ORIGINAL DRAFT 10/30/02 JRK					10/30/02	NTS	2 of 2	
REV DESCRIPTION DATE INT					GAD #	TOOL #		
					LI0805H121R-10-C	-		

