

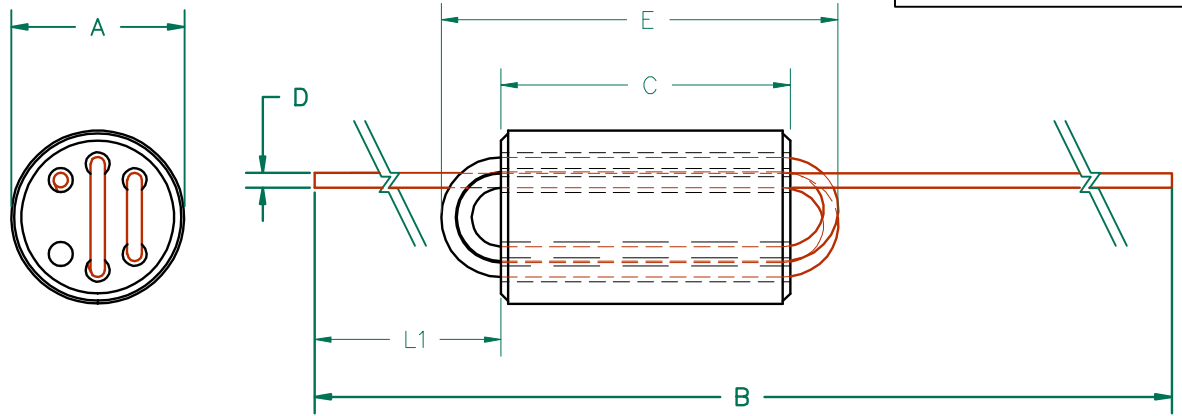


UNCONTROLLED DOCUMENT

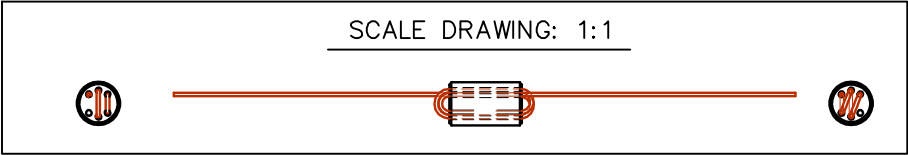

ELECTRICAL TESTING

TEST:	Z	Z
FREQUENCY	25 MHz	100 MHz
NOMINAL	538 Ω	835 Ω
MINIMUM	- Ω	626 Ω

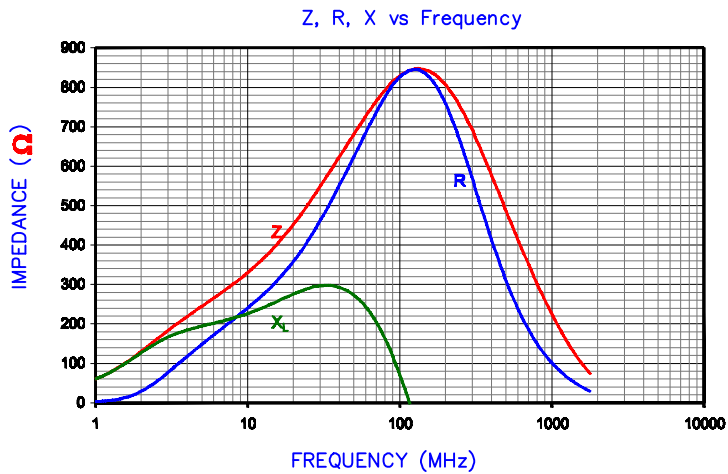



NOTES: UNLESS OTHERWISE SPECIFIED

1. WIRE: 2-1/2 TURNS, 24 AWG 0.51 [.020] DIA,
2. PLATING: 100% TIN 5 μ ± 2 μ [200 μ in ± 80 μ in]
3. REF. STEWARD CORE P/N 28C0236-000.
4. SOLDERABILITY:
 - A. LEADS SOLDERABILITY CONFORMS TO MIL-STD-202F, METHOD 208F.
5. WEIGHT/1000 1.22 kgs. 2.7 lbs.

AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture

DIMENSIONS:

A	6.00 [.236]	+	0.20 [.008]
B	86.46 [3.404]	+	6.35 [.250]
C	10.00 [.394]	+	0.25 [.010]
D	0.51 [.020]	+	TYP.
E	14.61 [.575]	+	MAX.
L1	38.10 [1.50]	+	3.18 [.125]

DIMENSIONS ARE IN mm [INCHES]				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
M	UPDATE COMPANY LOGO	04/16/07	JRK	 			
L	REV A DIM & TOLS ADD ROHS SYMBOL	03/08/07	JRK				
K	CORRECT REV BLOCK mm [INCHES]	10/20/06	JRK				
J	CORRECT NOTE 5	07/07/05	JRK				
H	ADD RIGHT HAND VIEW OF PART UPDATE CENTER VIEW	12/09/03	JRK				
G	CORRECT END VIEW OF PART	12/09/03	JRK				
F	CHANGE P/N TO -10 REVISE NOTES 2&5	10/07/03	JRK				
E	ADD Z,R, XI CURVE UPDATE NOTES	05/15/02	JRK				
D	UPDATE PRINT FORMAT,CHG NOTE #1	12/15/00	JRK				
REV	DESCRIPTION	DATE	INT				