


UNCONTROLLED DOCUMENT

29F0303-0T0-10



PHYSICAL DIMENSIONS:

A	7.62	[.300]	± 0.13	[.005]
B	5.08	[.200]	± 0.08	[.003]
C	10.44	[.411]	± 0.20	[.008]
C1	11.43	[.450]		MAX
D	2.54	[.100]	± 0.13	[.005]
E	2.54	[.100]	± 0.13	[.005]

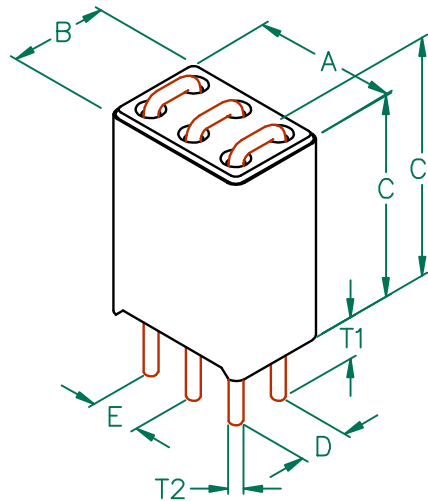

ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	266	
Minimum	200	
Maximum	333	0.01
		8,000 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. BULK PACKED, 1260 per CASE.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.


WIRE DIMENSIONS:

T1	3.18	[.125]	TYP
T2	0.64	[.025]	REF

|Z| , R, AND X vs. FREQUENCY

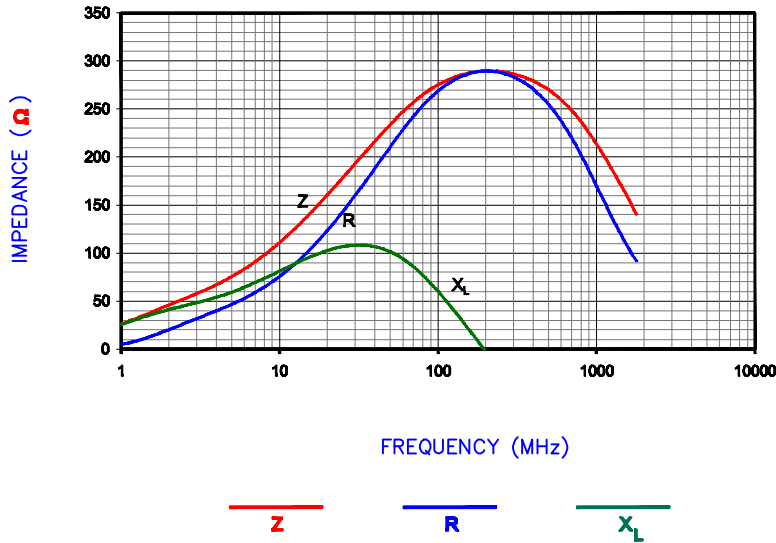

HOLE PATTERN FOR THRU-HOLE INSERTION

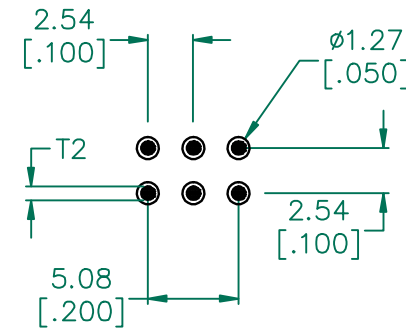

Agilent E4991 Network/Spectrum Analyzer
HP 16194A Test Fixture

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
PROJECT/PART NUMBER:				REV	PART TYPE:
C ADD ROHS SYMBOL UPDATE COMPANY LOGO 10/20/08 JRK				C	ASSEMBLY
B UPDATE COMPANY LOGO 04/24/07 JRK				DATE:	DRN BY:
A ORIGINAL DRAFT 04/28/04 JRK				04/28/04	JRK
REV DESCRIPTION DATE INT				SCALE:	SHEET:
				NTS	
CAD # 29F0303-0T0-10-C				TOOL #	
				H0303	2 of 3

