

29F0818-0SR-10




PHYSICAL DIMENSIONS:

A	11.43 [.450]	+ 0.18 [.007]
B	4.50 [.177]	+ 0.08 [.003] - 0.10 [.004]
B1	7.04 [.277]	MAX
C	2.92 [.115]	+ 0.08 [.003]
C1	3.56 [.140]	MAX
D	2.24 [.088]	+ 0.08 [.003]
E	1.27 [.050]	+ 0.13 [.005]

WIRE DIMENSIONS:

T1	2.16 [.085]	+ 0.25 [.010]
T2	0.50 [.020]	TYP.
T3	0.25 [.010]	TYP.

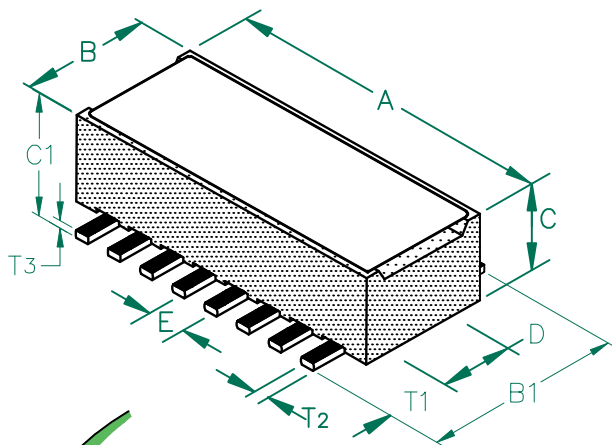


ELECTRICAL CHARACTERISTICS:

	Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	75		
Minimum	56		
Maximum	94	0.01	6,000 mA



NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 900 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION # CART818-03.
4. TERMINATION FINISH IS 100% TIN.

LAND PATTERNS FOR REFLOW SOLDERING

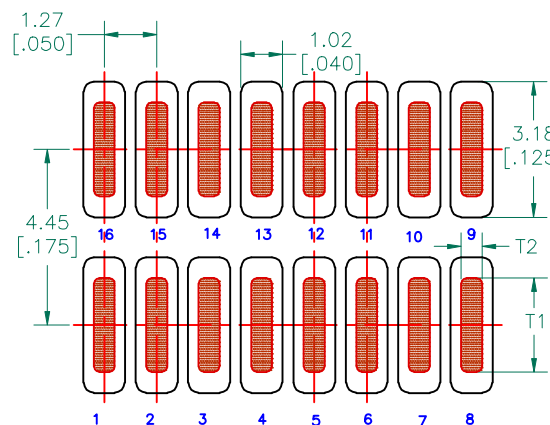

RECOMMENDED SOLDERING CONDITIONS

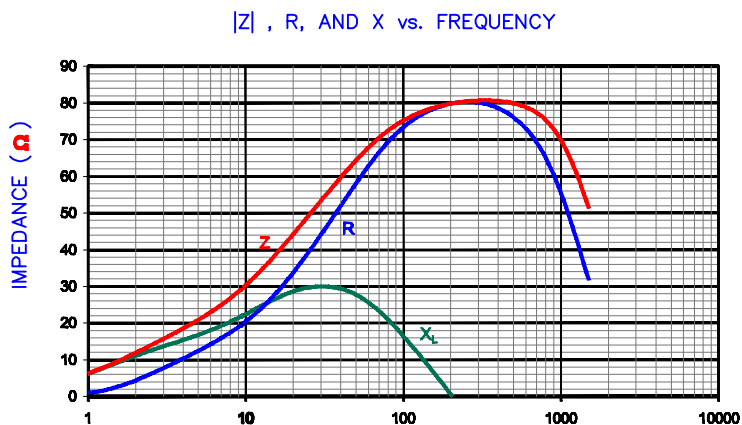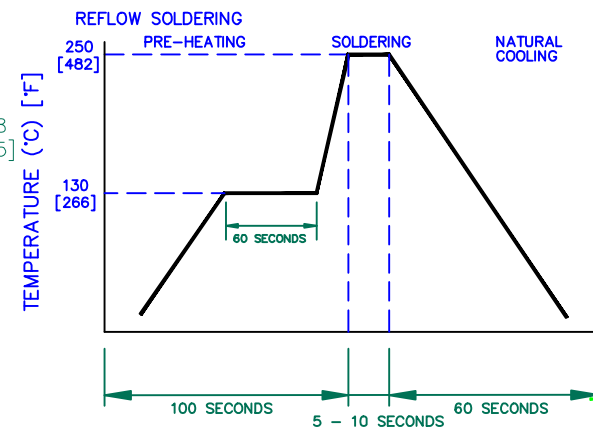

Z R X_L

UNCONTROLLED DOCUMENT

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	UPDATE COMPANY LOGO	10/22/08	JRK	PROJECT/PART NUMBER: 29F0818-0SR-10	REV D	DRAWN BY: JRK	SHEET: 2 of 3
C	UPDATE COMPANY LOGO	05/03/07	JRK				
B	CHG TOLS ON E, ADD ROHS COR T2/T3	03/20/07	JRK				
A	ORIGINAL DRAFT	04/30/04	JRK	DATE: 04/30/04	SCALE: NTS		
REV	DESCRIPTION	DATE	INT	CAD # 29F0818-0SR-10-D	TOOL # -		

