


HF1206J150R-10

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:

A	3.20 [.126]	+ 0.20 [.008]
B	1.60 [.063]	+ 0.20 [.008]
C	1.10 [.043]	+ 0.20 [.008]
D	0.51 [.020]	+ 0.25 [.010]


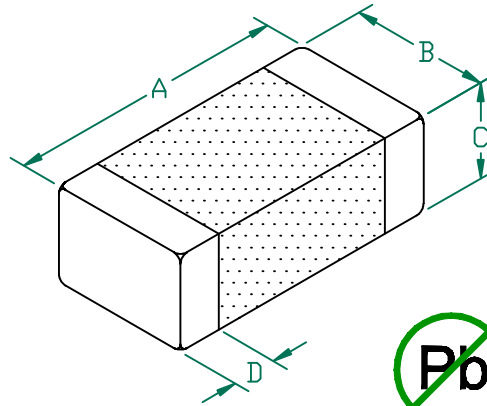


ELECTRICAL CHARACTERISTICS:


Z @ 1GHz (Ω)	DCR (Ω)	Rated Current
Nominal	15	
Minimum	11	
Maximum	19	1000 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.

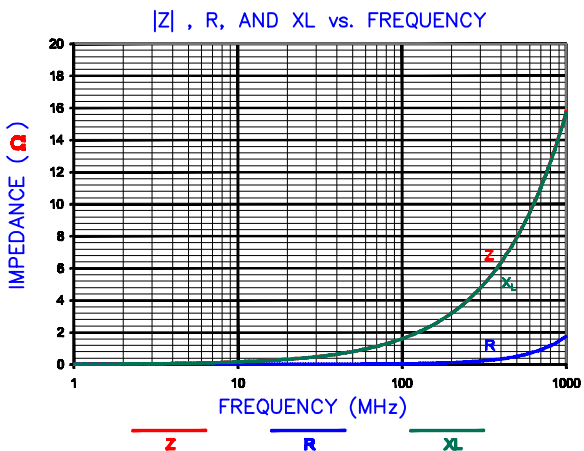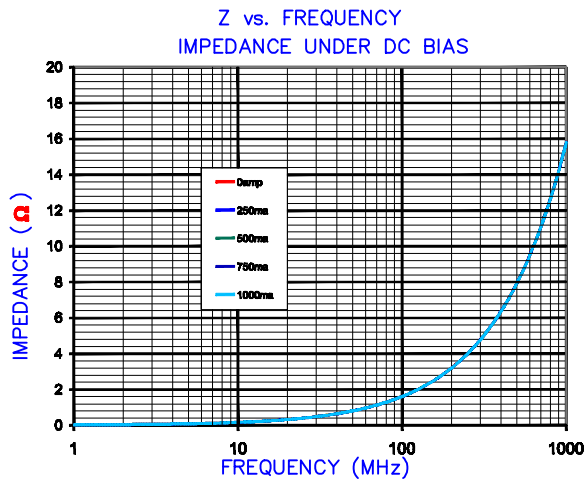


LAND PATTERNS FOR REFLOW SOLDERING

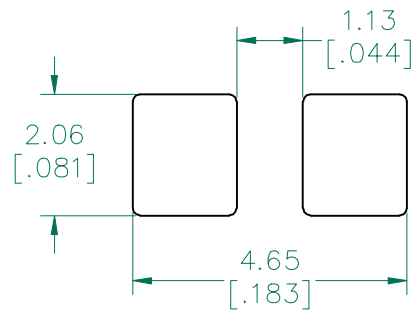

(For wave soldering, add 0.762 [0.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

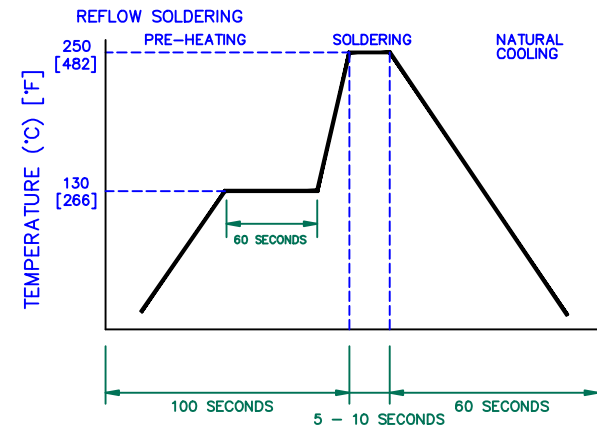

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				Steward		<small>part of</small> Laird	
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:	
C UPDATE COMPANY LOGO 01/14/08 JRK				HF1206J150R-10	C	CO-FIRE	JRK
B CORRECT LANDPATTERN DIMENSIONS 08/28/06 JRK				DATE:	SCALE:	SHEET:	
A ORIGINAL DRAFT 08/23/04 JRK				08/23/04	NTS	2 of 2	
REV	DESCRIPTION	DATE	INT	CAD #	TOOL #		
				HF1206J150R-10-C	-		