SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 (TRACEABLE TO F4340)

CSA CERTIFIED: CSA 22.2, # 0,0.4,8 (TRACEABLE TD F4340)

VDE APPROVED: EN 133 200 (TRACEABLE TO F4340)

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 10 AMP/40°C, 120/250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.16 mA@ 120V 60Hz 0.28 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, $T_{0}\,,$ HIGHER THAN 40°C, THE MAXIMUM OPERATING

CURRENT, IO, IS AS FOLLOWS:

 $/ 100 - T_0$ $I_0 = I_r -$ 60

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDS

CATALOG # 10ERK1 EC # APPRVD. DATE Р.ЛП 07-027019 14N□V07 26N0V07 PJ0 07-027915

CUSTOMER DRAWING

TEST SPECIFICATIONS:

INDUCTANCE: 4.97 mH NDMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0044 μF ±20% LINE TO LINE: 0.741 μF±20% DISCHARGE RESISTOR: 1.0M \cap

L/G AND L/L I.R.

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

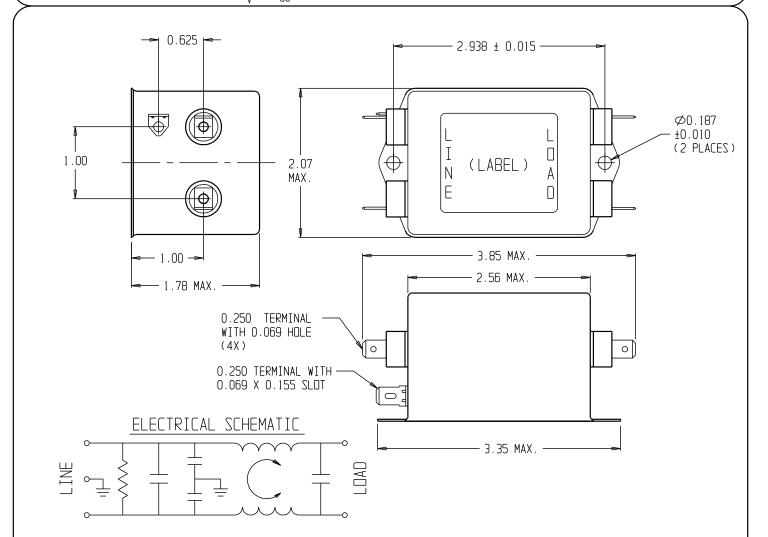

SHALL COMPLY WITH TYCO ELECTRONICS 230-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES

50A- 50A(MINIMUM) INSERTION LOSS											THIRD ANGLE		
FREQUENCY MHz	. 05	. 10	. 15	.50	1.0	2.0	5.0	10	20	30	PROJECTION UNLESS OTHERWISE SPECIFIED,	Tyco Electronics CORCOM PRODUCTS, 620 S. BUTTERFIELD RD. MUNDELEIN IL 60060	
COMMON dB	20	27	31	45	45	44	46	47	53	44	TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO THE SUPPLIED THE SUPPLIED AND PROPRIETARY AND THE SUPPLIED AND SUPP	POWER LINE FILTER TYCO ELECTRONICS PART NO. 2-1609089-5	
DIFF. dB	14	12	30	65	80	84	78	70	60	50	_TYCO ELECTRONICS CORPORATION AND ITS MORLOWICE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYDE OTHER THAN TYCO ELECTRONICS PRESDNEL, MITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA USA	SCALE: NTS OFFEBOG OFF	