

Customer & part number :




Toko sample number : 302HXPK-1278B

FOR REFERENCE ONLY

Dimensions.

	λ (max)
302HXPK	14.6
302HXPK	14.6
302HXPK	14.6
302HXPK	14.6

(Unit in m/m)

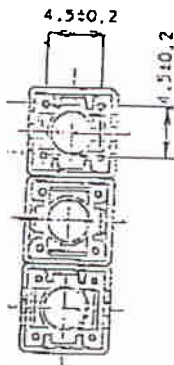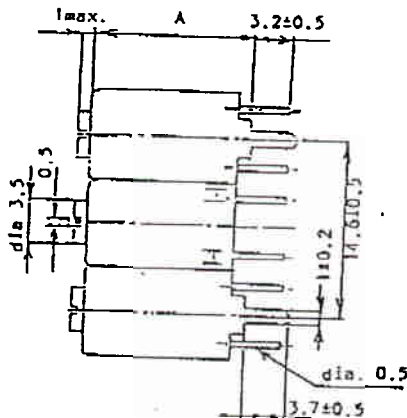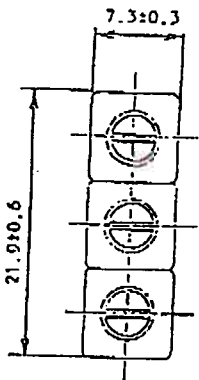


Electrical characteristics.

Center frequency (Fo)	:	904MHz
Turning range	-----	Fo ± 3
- 3 db bandwidth at Fo	:	20MHz min
Insertion loss at Fo	:	3.5dB max
Selectivity		
Fo + 60 Mhz	:	28dB min
Fo - 60. Mhz	:	35db min
Ripple in pass band	:	0.5dB max
Input impedance	:	50 ohms
Output impedance	:	50 ohms

Connections.

(Bottom view)

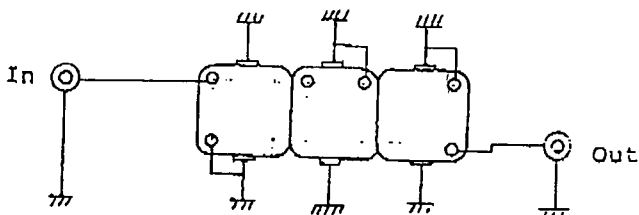

Remarks.

1. Please return one copy with your signature when samples are approved under the above specification.

MKR(125):904MHz

A(*):MAGTD

-1.86dB

10dB/

M0


B(*):B

-1.88dB

1dB/

~~-1.88dB~~

0.01dB

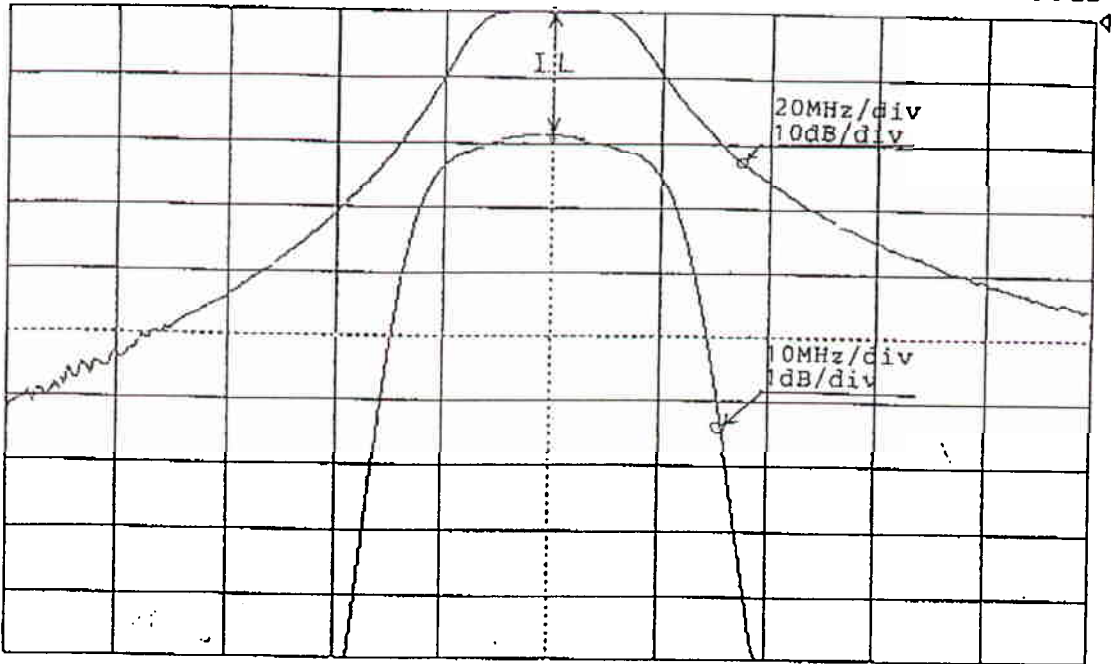

CF: 904MHz

SPAN: 200MHz

OUT(B): 0.00dBm

ST: 1.80sec

EL: 0.00cm

IRG(R): 0dBm

IRG(T): 0dBm


RBW: 10kHz

UBW: 10kHz

50Ω

MAGTD

OFFSET TOP

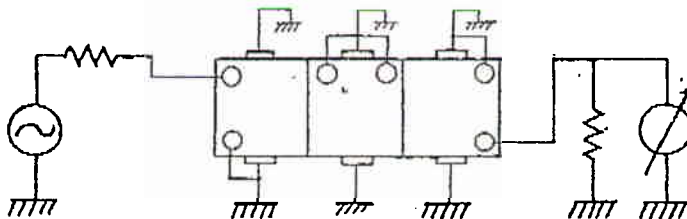

(Bottom View)