

High Frequency Ceramic Solutions

2.45 GHz Band Pass Filter

P/N 2500BP15M400

Detail Specification: 02/06/06

Page 1 of 2


General Specifications

| | |
|--------------------|--------------------------|
| Part Number | 2500BP15M400 |
| Frequency (MHz) | 2300 - 2700 |
| Insertion Loss | 2.0 dB max. |
| Return Loss | 9.5 dB min. |
| Attenuation (min.) | 15 dB @ 100 -1800 MHz |
| Attenuation (min.) | 20 dB @ 3400 - 11700 MHz |

| | |
|-----------------------|--------------|
| Impedance | 50 Ω |
| Input Power | 500 mW max. |
| Operating Temperature | -40 to +85°C |
| Storage Temperature | -40 to +85°C |
| Reel Quantity | 4,000 |


| | | | | |
|--------|-------------------|------------|---------------|-----------------------------|
| P/N | Packaging Style | Bulk | Suffix = S | Eg. 2500BP15M400S |
| | | T & R | Suffix = E | Eg. 2500BP15M400E |
| Suffix | Termination Style | 100% Tin | Suffix = None | Eg. 2500BP15M400(E or S) |
| | | Tin / Lead | Suffix = /Pb | Eg. 2500BP15M400(E or S)/Pb |

| Terminal Configuration | |
|------------------------|----------|
| No. | Function |
| 1 | GND |
| 2 | OUT |
| 3 | GND |
| 4 | IN |



Mechanical Dimensions


| | In | mm |
|---|---------------|-------------|
| L | 0.079 ± 0.006 | 2.00 ± 0.15 |
| W | 0.049 ± 0.004 | 1.25 ± 0.10 |
| T | 0.037 ± 0.004 | 0.95 ± 0.10 |
| a | 0.049 ± 0.006 | 1.25 ± 0.15 |
| b | 0.012 ± 0.006 | 0.30 ± 0.15 |
| c | 0.010 ± 0.006 | 0.25 ± 0.15 |
| d | 0.014 ± 0.006 | 0.35 ± 0.15 |

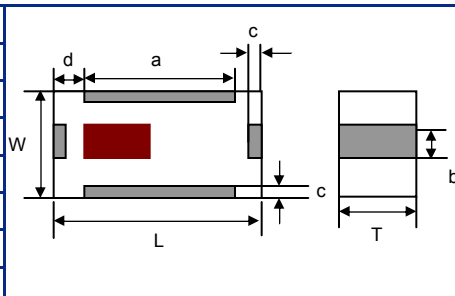

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

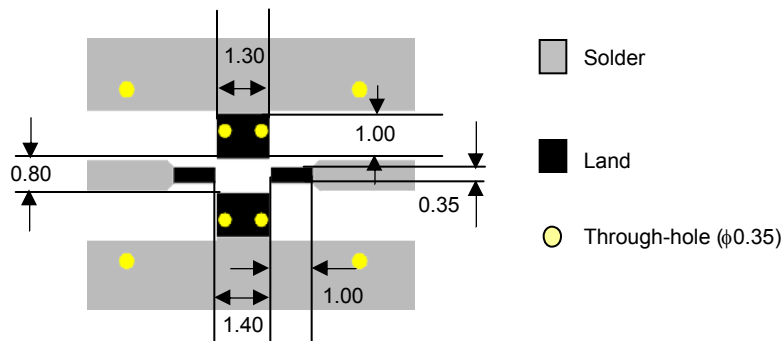

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


2.45 GHz Band Pass Filter

P/N 2500BP15M400

Detail Specification: 02/06/06

Page 2 of 2

Typical Electrical Performance (T=25°C)

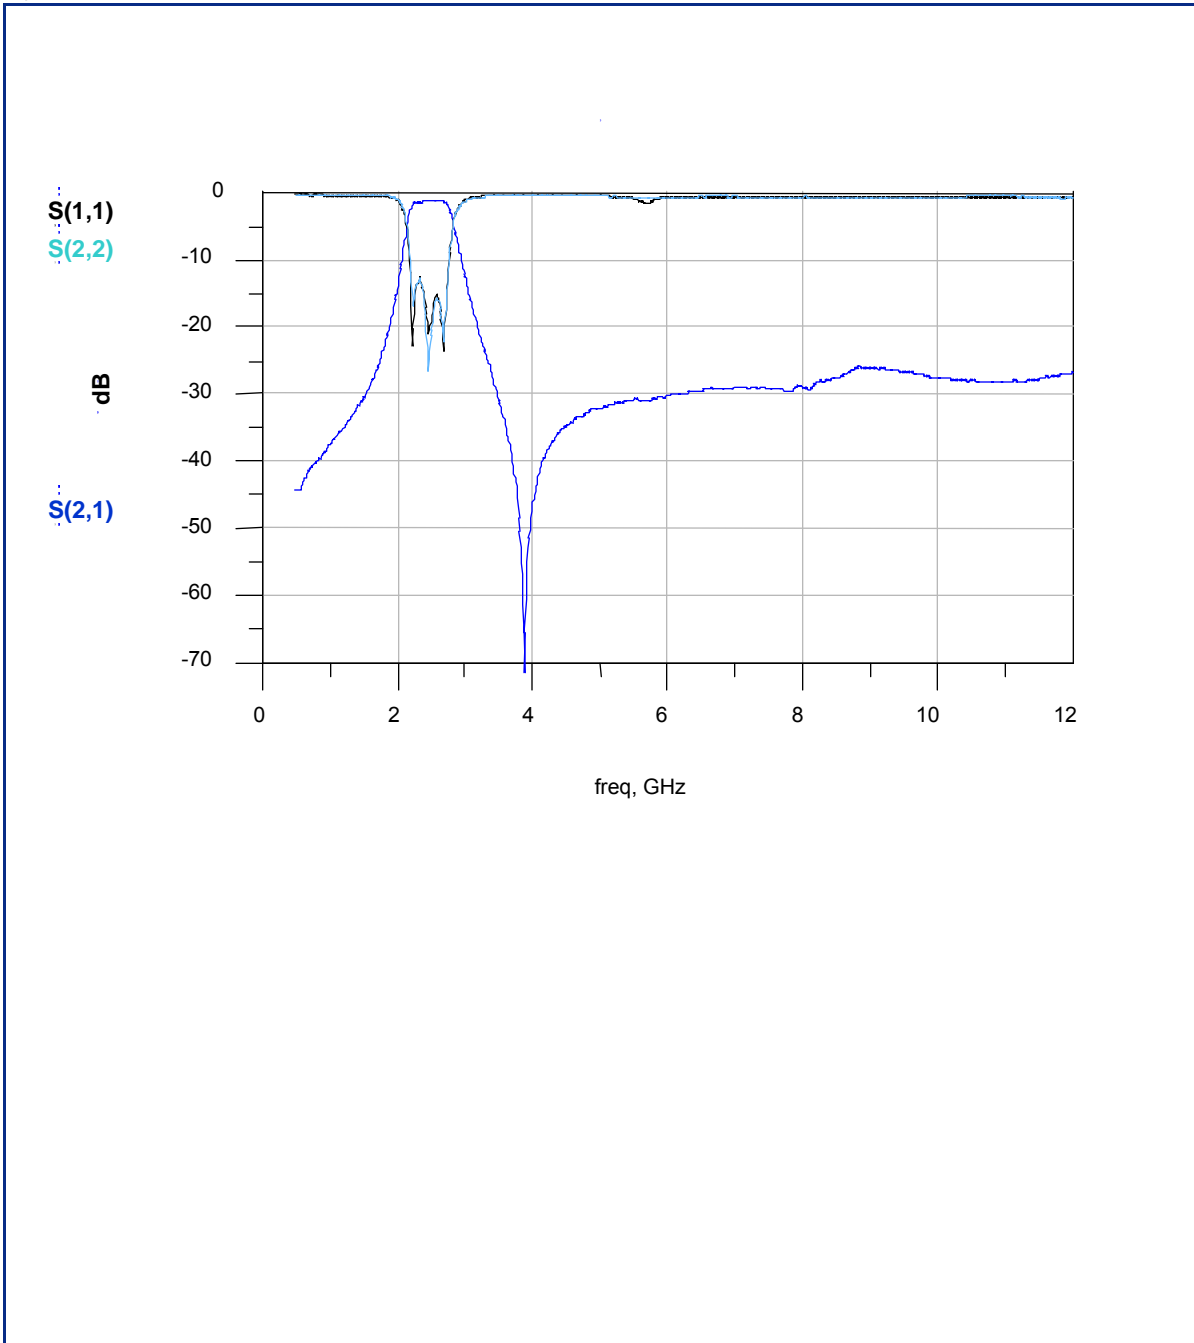

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved