



7mm TYPE 7PA

Frequency Range: 10–200kHz
 Inductance Range: 1-25mH
 Temperature Coefficient: TC(L) 250ppm/°C max
 Internal Capacitance Values: 10–6800pF

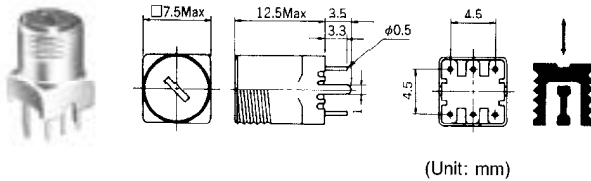

7mm TYPE 7PLA

Frequency Range: 10–200kHz
 Inductance Range: 1-15mH
 Temperature Coefficient: TC (L) 750±250ppm/°C
 Internal Capacitance Values: 10-6800pF

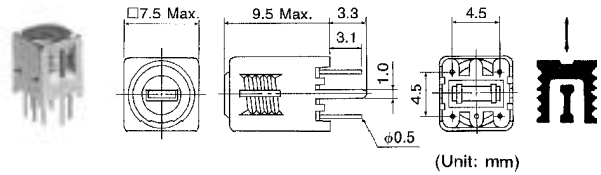

Features

- Designed for low frequencies and for use in RF applications, where a high saturation level becomes useful in achieving an extended dynamic range.

STANDARD COILS SELECTION GUIDE

TYPE 7PA				
TOKO Part Number	Inductance Range (mH)	Q (min.)	Test Frequency (KHz)	
126ANS-T1094Z	1.0±6%	60	252	
126ANS-T1095Z	1.2±6%	60	252	
126ANS-T1096Z	1.5±6%	60	252	
126ANS-T1097Z	1.8±6%	60	252	
126ANS-T1098Z	2.2±6%	60	252	
126ANS-T1099Z	2.7±6%	60	252	
126ANS-T1100Z	3.3±6%	60	252	
126ANS-T1101Z	3.9±6%	60	252	
126ANS-T1102Z	4.7±6%	60	252	
126ANS-T1103Z	5.6±6%	60	252	
126ANS-T1104Z	6.8±6%	60	252	
126ANS-T1105Z	8.2±6%	60	252	
126ANS-T1106Z	10.0±6%	60	79.6	
126ANS-T1107Z	12.0±6%	60	79.6	
126ANS-T1108Z	15.0±6%	60	79.6	
126ANS-T1109Z	18.0±6%	60	79.6	
126ANS-T1110Z	22.0±6%	60	79.6	

TYPE 7PLA				
TOKO Part Number	Inductance Range (mH)	Q (min.)	Test Frequency (KHz)	
284XNS-1111Z	2.7±6%	80	252	
284XNS-1158Z	3.3±6%	70	252	
284XNS-1356Z	3.9±4%	70	252	
284XNS-1357Z	4.7±3%	80	252	
284XNS-1015Z	6.8±6%	70	252	
284XNS-1132Z	8.2±5%	70	252	
284XNS-1394Z	10.0±5%	50	252	
284XNS-1016Z	12.0±6%	50	79.6	
284XNS-1017Z	15.0±6%	50	79.6	