



	<b>SPECIFICATION</b>	
	SUMIDA TYPE      CDRH125	PART NO.    REF. TO THE ATTACHED SHEET.

1. DIMENSION (UNIT mm)

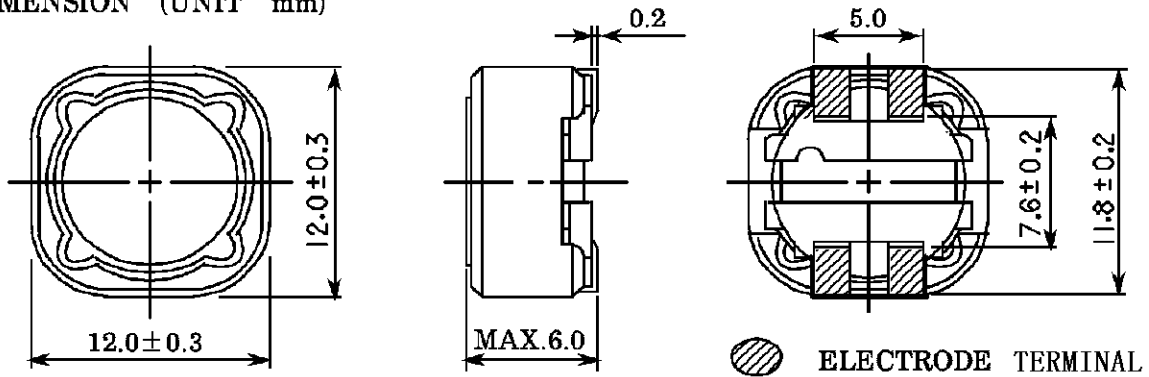


\* DIMENSION WITHOUT TOLERANCE ARE APPROX.

2. CONNECTION (BOTTOM)



3. STAMP (Ex.)

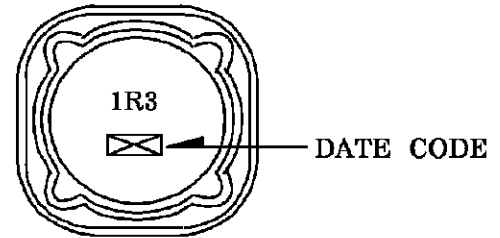


DIRECTLY STAMP  
UNFIXED THE POSITION

4. NOTE

\* PLEASE DO NOT USE A WASHING AGENT.

\* ENCLOSING CONDITION OF COILS.

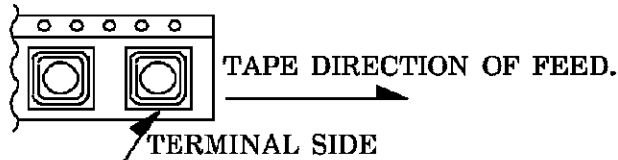

\* CARRIER TAPE PACKING SPECIFICATION IN DETAIL.(S-074-500)


\* RECOMMENDED REFLOW CONDITION TO BE ACCORDING TO S-074-5003.

6 th DEC . , 1996			SUMIDA CODE	4735
C H K.	C H K.	D R G.	DRG. NO.      2/5	
O.SATO	NISHI MURA	MONMA M		
			<b>S-074-542</b>	

# GENERAL CHARACTERISTICS

TYPE	CDRH125
------	---------

1. OPERATING TEMPERATURE : - 25 ~ +80 °C (COIL CONTAIN HEAT)
2. EXTERNAL APPEARANCE : ON VISUAL INSPECTION, THE COIL HAS NO EXTERNAL DEFECTS.
3. ELECTRODE STRENGTH  $\Delta$  : AFTER SOLDERING, BETWEEN COPPER PLATE AND ELECTRODE OF COIL, PUSH IN TWO DIRECTIONS OF X, Y WITHSTANDING 5.0N(0.51kgf) FOR 10±2 SECONDS. ELECTRODE SHOULD NOT PEEL OFF. (REFER TO FIGURE AT RIGHT)
 


4. HEAT ENDURANCE TEST : REFER TO S-074-5002.
5. DIELECTRIC STRENGTH : NO APPARENT AT 100V D.C. FOR 1 MINUTE BETWEEN COIL-CORE.
6. INSULATING RESISTANCE : OVER 100 MΩ AT 100V D.C. BETWEEN COIL-CORE.
7. INDUCTANCE TEMPERATURE COEFFICIENT : ( 0 ~ 2000 )×10<sup>-9</sup>/°C ( -25 ~ + 80°C )
8. HUMIDITY TEST : INDUCTANCE DEVIATION WITHIN ± 5.0 % AFTER 96 HOURS IN 90 ~ 95 % RELATIVE HUMIDITY AT 40 ± 2°C AND 1 HOUR DRYING UNDER NORMAL CONDITION.
9. VIBRATION TEST : INDUCTANCE DEVIATION WITHIN ± 3.0 % AFTER VIBRATION FOR 1 HOUR. IN EACH OF THREE ORIENTATIONS AT SWEEP VIBRATION (10~55~10 Hz) WITH 1.5 mm P-P AMPLITUDE.
10. SHOCK TEST : INDUCTANCE DEVIATION WITHIN ± 3.0 % AFTER DROP DOWN WITH 981m/s<sup>2</sup>(100G) SHOCK ATTITUDE UPON A RUBBER BLOCK METHOD SHOCK TESTING MACHINE, FOR 1 TIME, IN EACH OF THREE ORIENTATIONS.

6 th DEC . , 1996

C H K .	C H K .	D R G .
O.SATO	NISHI MURA	MONMA  M

DRG. NO.	3/5
<b>S-074-542</b>	

# SPECIFICATION

TYPE	CDRH125
------	---------

## ELECTRICAL CHARACTERISTICS

NO.	PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. ( $\Omega$ ) [MAX.] (at 20°C) (TYPICAL BALUE)	RATED CURREN T (A) ※2	SUMIDA CODE
01	CDRH125-1R3NC	1R3	1.3 $\mu$ H + 30% - 20%	12 m ( 9 m)	8.00	-1062
02	CDRH125-2R1NC	2R1	2.1 $\mu$ H + 30% - 20%	14 m (11 m)	7.00	-1073
03	CDRH125-3R1NC	3R1	3.1 $\mu$ H + 30% - 20%	17 m (13 m)	6.00	-1084
04	CDRH125-4R4NC	4R4	4.4 $\mu$ H + 30% - 20%	20 m (16 m)	5.00	-1095
05	CDRH125-5R8NC	5R8	5.8 $\mu$ H + 30% - 20%	21 m (17 m)	4.40	-1106
06	CDRH125-7R5NC	7R5	7.5 $\mu$ H + 30% - 20%	24 m (19 m)	4.20	-1117

※ 1: INDUCTANCE(L) MEASURED AT A FREQUENCY OF at 7.96 MHz.


※ 2: THIS INDICATES THE VALUE OF CURRENT WHEN THE INDUCTANCE IS 75% MORE THAN IT'S NOMINAL VALUE AND TEMPERATURE RISING  $\Delta t = 40^\circ\text{C}$  LOWER AT D. C. SUPERPOSITION. ( $T_a = 20^\circ\text{C}$ )

6 th DEC . , 1996			SUMIDA CODE	4735
C H K.	C H K.	D R G.	DEG NO. 4/5	
O.SATO	NISHI MURA	MONMA M		
			S-074-542	

# SPECIFICATION

TYPE	CDRH125
------	---------

DIMENSION RECOMMENDED (mm)

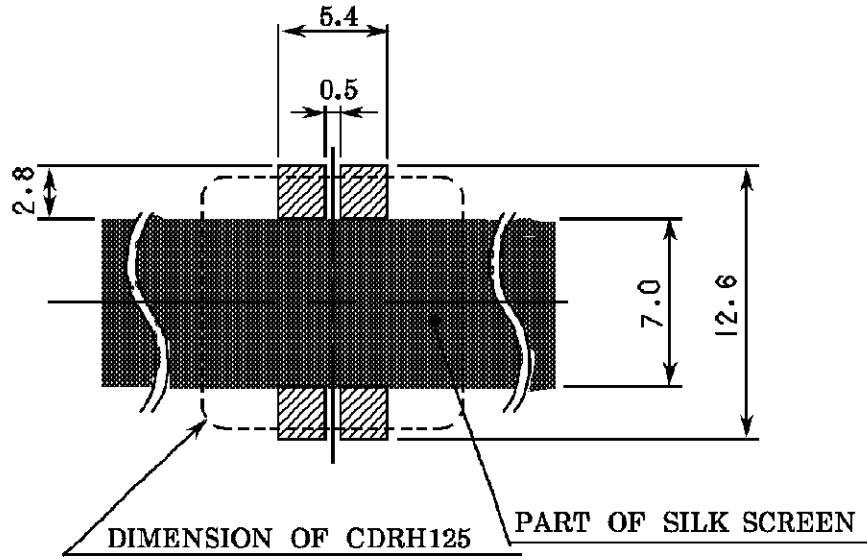

PLEASE COAT WITH SILK BETWEEN ELECTRODE.  $\triangle$

6 th DEC . , 1996

C H K.	C H K.	D R G.
O.SATO	NISHI MURA	MONMA M

DRG. NO.	5/5
<b>S-074-542</b>	