



EP10 LM259X Inductor
150 uHy 0.63 ADC

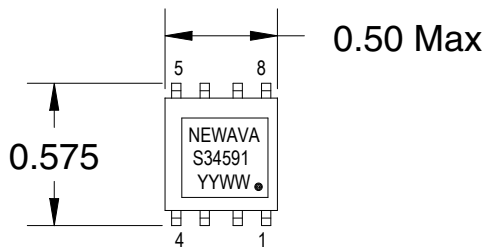


MECHANICALS: 0.440" Max Height
0.500" Max Width of Body
Coplanarity of +/- 0.004" Across all Leads
All pins may not be used.

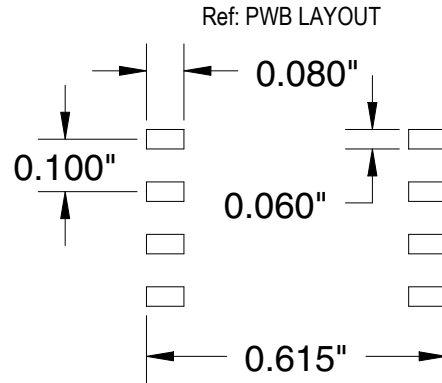

ELECTRICAL SPECS:

- 1: INDUCTANCE: @ 10 kHz, 0.1 Vrms
(1 thru 4 to 5 thru 8) = 150 - 195 uHy
- 2: DCRs:
(1 thru 4 to 5 thru 8) = 0.18 Ohms Max.
- 3: SRF: 950.0 kHz Min
- 4: HIPOT: 500 VDC
Winding to core (2 Sec., 5 mA Max)



Specifications at room temperature of 25 C.

A	2/28/03		KAM	Production Release		
REV.	DATE	ECN	BY	DESCRIPTION		
TOLERANCES ON				Newava Tech. Watertown, SD 57201 605-886-0264	150 uHy Inductor 0.63 ADC	
.XXX + -	.XX + -	ANGLE + -				
DRAWN:			DATE	SCALE	MODEL	DRAWING NO.
CHECKED: -			-			S34591
APPROVED: -			- KAM	NEXT ASSY:		
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART				OR USED DETRIMENTALLY TO OUR INTEREST		SHEET 1 OF 1