



FEATURES

- RoHS compliant
- Axial format
- Up to 5.35A I_{DC}
- 4.7μH to 10mH
- Low DC resistance
- Compact size
- MIL-I-23053/5 class III sleeving
- Fully tinned leads
- Supplied in packs of 10
- Custom & radial parts available
- Backward compatible with Sn/Pb soldering systems

DESCRIPTION

The 1800 Series of inductors are particularly suited to use with a wide variety of switching regulators. Offering high current handling with a low mounting height, the devices are ideal where space is at a premium.

SELECTION GUIDE

| Order Code | Inductance (1kHz, 0.1V _{AC}) | DC Current ¹ | DC Resistance | Q @ f kHz | | SRF |
|------------|---|-------------------------|---------------|-----------|------|------|
| | ±10% | Max. | Max. | Nom. | | Nom. |
| | μH | A | mΩ | Q | f | MHz |
| 18472C | 4.7 | 5.35 | 9.0 | 112 | 1000 | 36.4 |
| 18682C | 6.8 | 4.15 | 12.0 | 78 | 500 | 23.6 |
| 18103C | 10.0 | 3.45 | 15.0 | 64 | 500 | 19.0 |
| 18153C | 15.0 | 3.00 | 18.0 | 55 | 500 | 15.9 |
| 18223C | 22.0 | 2.42 | 25.0 | 59 | 500 | 11.8 |
| 18333C | 33.0 | 2.00 | 40.0 | 48 | 500 | 11.5 |
| 18473C | 47.0 | 1.65 | 55.0 | 55 | 500 | 8.5 |
| 18683C | 68.0 | 1.35 | 70.0 | 31 | 100 | 6.6 |
| 18104C | 100.0 | 1.20 | 100.0 | 40 | 100 | 7.4 |
| 18154C | 150.0 | 1.10 | 165.0 | 47 | 100 | 4.4 |
| 18224C | 220.0 | 0.90 | 230.0 | 46 | 100 | 3.5 |
| 18254C | 250.0 | 0.80 | 255.0 | 50 | 100 | 3.7 |
| 18334C | 330.0 | 0.73 | 335.0 | 58 | 100 | 3.0 |
| 18474C | 470.0 | 0.60 | 465.0 | 56 | 100 | 2.2 |
| 18684C | 680.0 | 0.53 | 630.0 | 55 | 100 | 2.0 |
| 18105C | 1.0mH | 0.44 | 1.0Ω | 94 | 50 | 1.6 |
| 18155C | 1.5mH | 0.33 | 1.5Ω | 107 | 50 | 1.3 |
| 18225C | 2.2mH | 0.30 | 2.2Ω | 108 | 50 | 1.1 |
| 18335C | 3.3mH | 0.22 | 3.5Ω | 143 | 50 | 0.8 |
| 18475C | 4.7mH | 0.20 | 4.6Ω | 128 | 40 | 0.7 |
| 18685C | 6.8mH | 0.15 | 7.0Ω | 144 | 40 | 0.6 |
| 18106C | 10.0mH | 0.13 | 12.0Ω | 143 | 40 | 0.5 |

TYPICAL CORE/WIRE CHARACTERISTICS

| Inductance Temperature Coefficient | Resistance Temperature Coefficient | Curie Temperature (T _c) | Saturation Flux (B _{SAT}) |
|------------------------------------|------------------------------------|-------------------------------------|-------------------------------------|
| 430ppm | 4000ppm | 190°C | 325mT |

ABSOLUTE MAXIMUM RATINGS

| | |
|--------------------------------------|----------------|
| Operating free air temperature range | 0°C to 70°C |
| Storage temperature range | -55°C to 125°C |

SOLDERING INFORMATION²

| | |
|------------------------------|----------------------|
| Peak wave solder temperature | 300°C for 10 seconds |
| Pin finish | Bright tin |


All specifications typical at T_a=25°C

- 1 Maximum DC current occurs when either the inductance falls to 90% of its nominal value or when its temperature rise reaches 30°C, whichever is sooner.
- 2 For further information, please visit www.murata-ps.com/rohs



PACKAGE SPECIFICATIONS

MECHANICAL DIMENSIONS

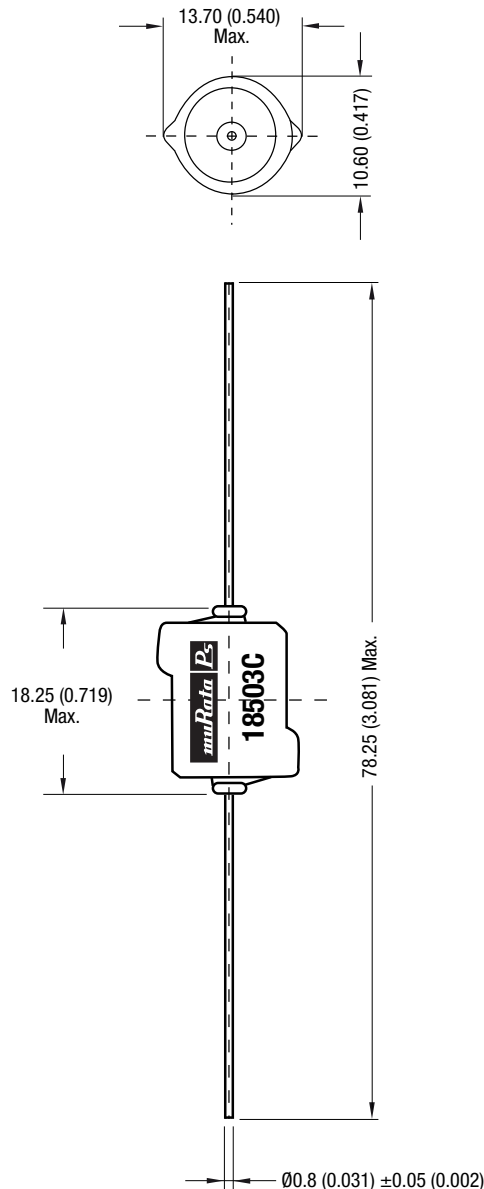

Unless otherwise stated, all dimensions in mm (inches) ±0.25 (0.01).
 Package weight: 4.6g Typ.
 Package quantity: 10

Murata Power Solutions, Inc.
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
 Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356
www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.
 © 2008 Murata Power Solutions, Inc.

- USA:** Mansfield (MA), Tel: (800) 233 2765, email: sales@murata-ps.com
- Canada:** Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
- UK:** Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
- France:** Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
- Germany:** München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com
- Japan:** Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com
 Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com
Website: www.murata-ps.jp
- China:** Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com
 Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com