

Compensated High Current Choke, 3-phase

**Description**

- Current compensated choke
- 3-phase choke
- THT-terminals
- Flange for mounting onto printed circuit board
- Fully potted resin

Standards

- EN 60938
- IEC 60950
- EN 55011/55014
- VDE 0871/0875

Applications

- Placed in front of frequency converter
- Stepper motor drives
- UPS-systems
- Inverter

References

[General Product Information](#)

Weblinks


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data


Rated Voltage	up to 540 VAC	Test Voltage	2.5 kV, 50 Hz, 2 sec, winding to winding
Rated Voltage	up to 760 VDC	Isolation Voltage	2.5 kV eff., 50 Hz, 2 sec, winding to ambient
Rated Current	10 - 20 A @ Ta 40 °C	Climatic Category	25/100/21 acc. to IEC 60068-1
Rated inductance	0.6 - 5 mH, Tol. -30% +50%	Allowable Operation Temp.	-25 °C to 100 °C
Power Operating Frequency	50 - 400 Hz		
Terminal technic	THT		
Weight	146 - 517 g		
Material: Housing	UL 94V-0		
Sealing Compound	UL 94V-0		

Dimensions

Case 31-3P

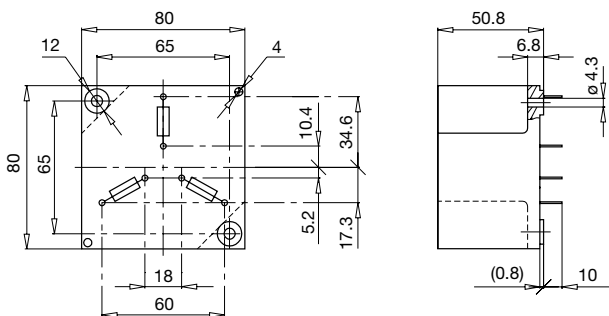

Case 46-3P

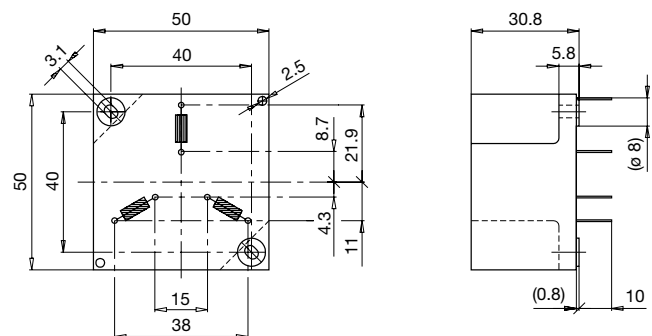

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Variants

I_n [A]	L_n [mH]	R_{cu} [mΩ]	P_{loss} [W]	f_{RES} [MHz]	Copper ø [mm]	Weight [g]	Case	Packing unit [pcs.]	Order Number
10	5	32	9.6	0.22	1.25	501	31-3P	2	DKIL-0331-1005
10	2.5	15	4.5	0.5	1.25	146	46-3P	10	DKIL-0346-1002
15	2	13	8.8	0.44	1.6	497	31-3P	2	DKIL-0331-1502
15	1	7	4.7	0.6	1.6	148	46-3P	10	DKIL-0346-1501
20	1	8	9.6	0.68	1.8	517	31-3P	2	DKIL-0331-2001
20	0.6	5	6	2.6	1.8	155	46-3P	10	DKIL-0346-20D6