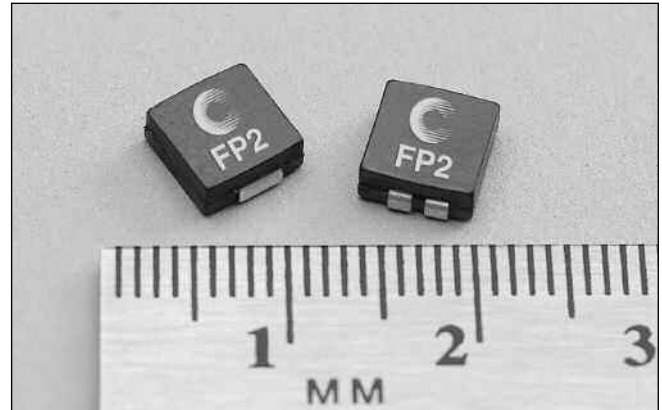


**Description**

- 125°C maximum total temperature operation
- Surface mount inductors designed for higher speed switch mode applications requiring lower inductance and high current
- Dual conductors allow for low inductance and high current or high inductance and lower current
- Inductance range from .047uH to 0.480uH
- Current range up to 42 Amps
- Meets UL 94V-0 flammability standard
- Ferrite core material


**Applications**

- Next generation microprocessors

**Environmental Data**

- Storage temperature range: -40°C to +125°C
- Operating ambient temperature range: -40°C to +125°C (range is application specific).
- Solder reflow temperature: +260°C max. for 10 seconds max.

**Packaging**

- Supplied in tape and reel packaging, 1700 (FP2-S and FP2-D) and 950 (FP2-S200 and FP2-VXXX) per reel


Parallel Mode							
Part Number	Inductance $\mu\text{H}$ (rated)	OCL <sup>(1)</sup> $\mu\text{H} \pm 15\%$	I <sub>RMS</sub> <sup>(2)</sup> Amps	I <sub>SAT</sub> <sup>(3)</sup> Amps	DCR <sup>(4)</sup> $\Omega$ nom.	Height	Volt- $\mu$ Sec (V $\mu$ S) ref. <sup>(5)</sup>
<b>Single Conductor</b>							
FP2-S047-R	0.047	0.047	39.0	42.0	0.00024	3.00	0.75
FP2-S068-R	0.068	0.068	39.0	32.0	0.00024	3.00	0.75
FP2-S082-R	0.082	0.082	39.0	26.0	0.00024	3.00	0.75
FP2-S100-R	0.100	0.100	39.0	22.0	0.00024	3.00	0.75
FP2-S120-R	0.120	0.120	39.0	18.0	0.00024	3.00	0.75
FP2-S200-R	0.200	0.200	37.0	19.0	0.00028	5.00	0.99
FP2-V050-R	0.050	0.050	37.0	70.0	0.00028	5.00	0.99
FP2-V100-R	0.100	0.100	37.0	40.0	0.00028	5.00	0.99
FP2-V120-R	0.120	0.120	37.0	33.0	0.00028	5.00	0.99
FP2-V150-R	0.150	0.150	37.0	25.5	0.00028	5.00	0.99
<b>Double Conductor</b>							
FP2-D047-R	0.047	0.047	37.0	42.0	0.00026	3.00	0.75
FP2-D068-R	0.068	0.068	37.0	32.0	0.00026	3.00	0.75
FP2-D082-R	0.082	0.082	37.0	26.0	0.00026	3.00	0.75
FP2-D100-R	0.100	0.100	37.0	22.0	0.00026	3.00	0.75
FP2-D120-R	0.120	0.120	37.0	18.0	0.00026	3.00	0.75
Series Mode							
Part Number	Inductance $\mu\text{H}$ ref. (rated)	OCL <sup>(1)</sup> $\mu\text{H}$ ref.	I <sub>RMS</sub> <sup>(2)</sup> Amps	I <sub>SAT</sub> <sup>(3)</sup> Amps	DCR <sup>(4)</sup> $\Omega$ ref.	Height	Volt- $\mu$ Sec (V $\mu$ S) ref. <sup>(5)</sup>
<b>Double Conductor</b>							
FP2-D047-R	0.188	0.188	16.0	21.0	0.0013	3.00	1.50
FP2-D068-R	0.272	0.272	16.0	16.0	0.0013	3.00	1.50
FP2-D082-R	0.328	0.328	16.0	13.0	0.0013	3.00	1.50
FP2-D100-R	0.400	0.400	16.0	11.0	0.0013	3.00	1.50
FP2-D120-R	0.480	0.480	16.0	9.0	0.0013	3.00	1.50

**Notes:** (1) Open Circuit Inductance Test Parameters: 1MHz, .100Vrms, 0.0Adc.  
 (2) RMS current for an approximate  $\Delta T$  of 40°C without core loss. It is recommended that the temperature of the part not exceed 125°C.  
 (3) Peak current for approximately 30% rolloff at 20°C.


(4) DCR limits 20°C.  
 (5) Applied Volt-Time product (V- $\mu$ S) across the inductor. This value represents the applied V- $\mu$ S at 500KHz necessary to generate a core loss equal to 10% of the total losses for 40°C temperature rise.

**Mechanical Diagrams**

Single Conductor

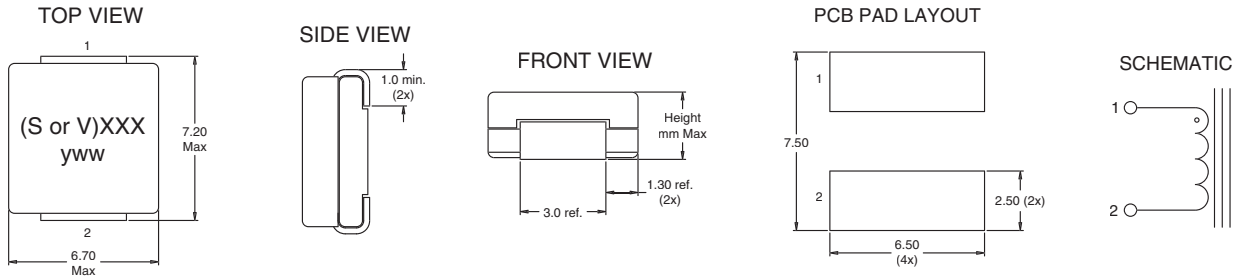


Dual Conductor

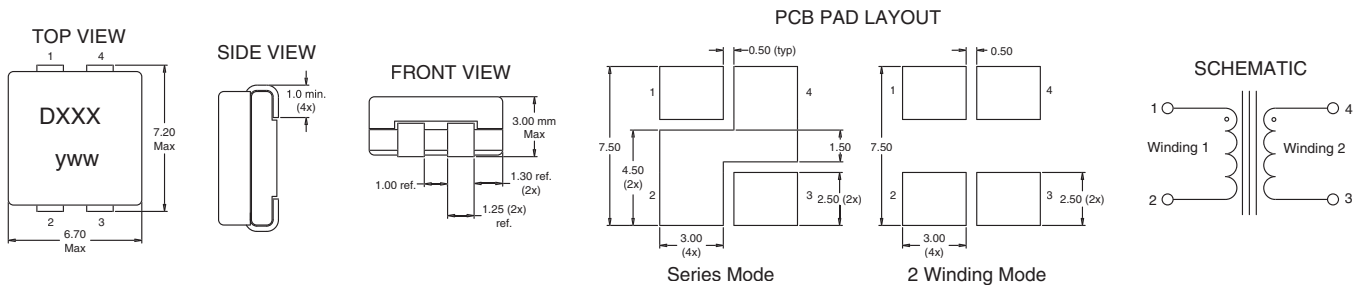

**Notes:** (1) Marking SXXX = S: Single Conductor Style, DXXX = D: Dual Conductor Style, XXX - last three digits of part number. Date Code: yww = y: Last Digit of year, ww: week of year.  
(2) All Dimensions are in millimeters unless otherwise specified.

(3) For parallel mode operation, connect terminals 1 to 4 and 2 to 3 on PCB (use Single Conductor PCB Layout) For series mode operation, connect terminals 2 to 4 on PCB (Dual Conductor Model).


**Packaging Information**

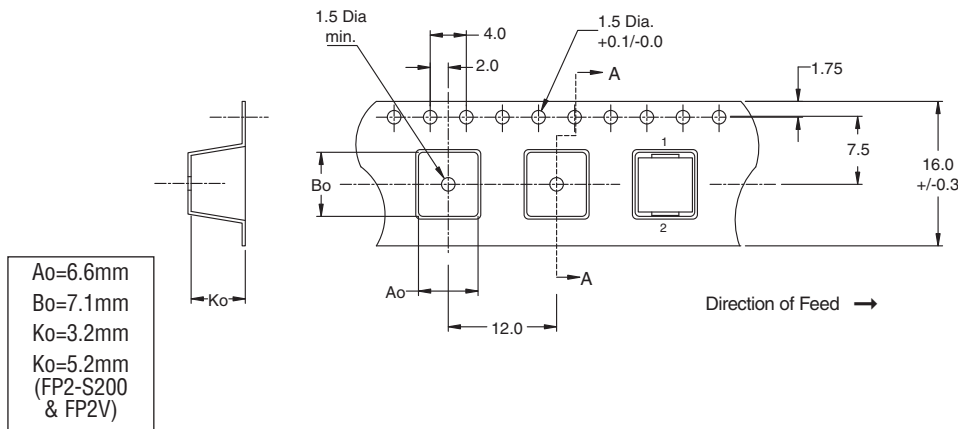


  
ACTUAL SIZE  
FLAT-PAC'S

**Inductance  
Characteristics**


**OCL vs. Isat**

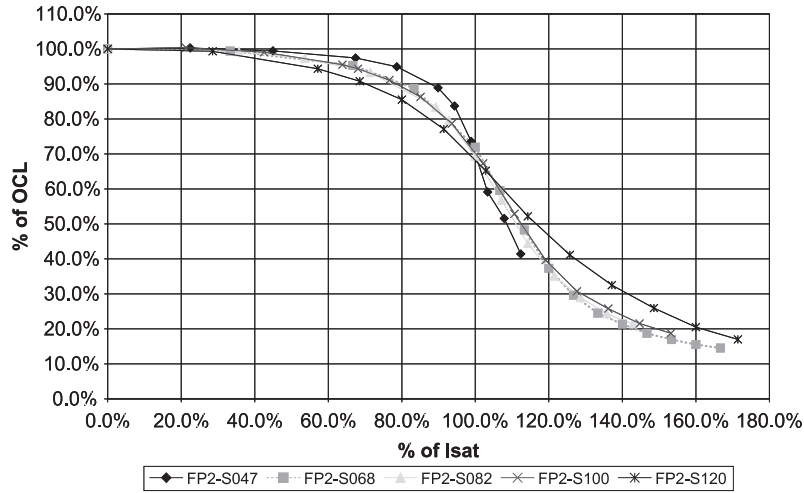

**OCL vs. Isat**

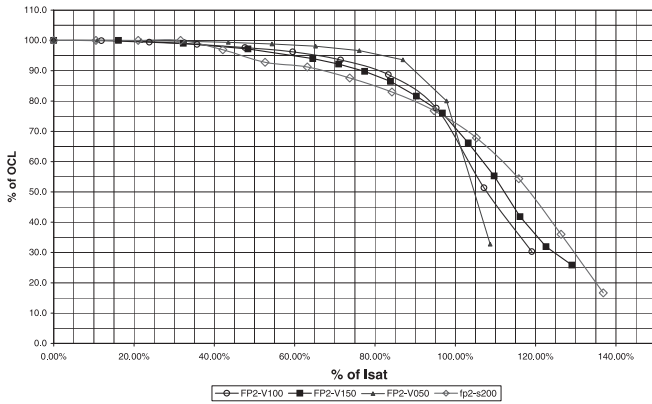


**OCL vs. Isat**

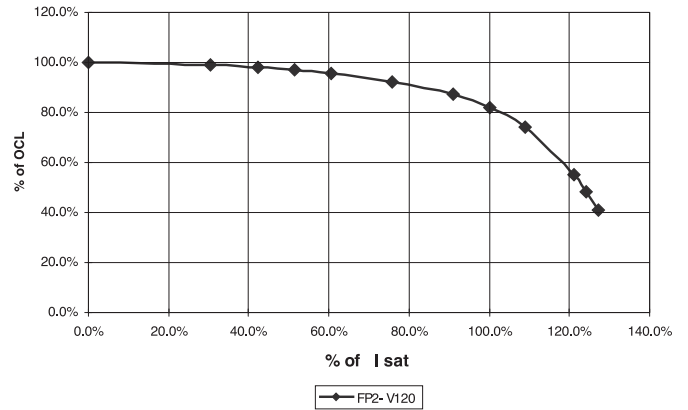

**Core Loss**

**IRMS DERATING WITH CORE LOSS**

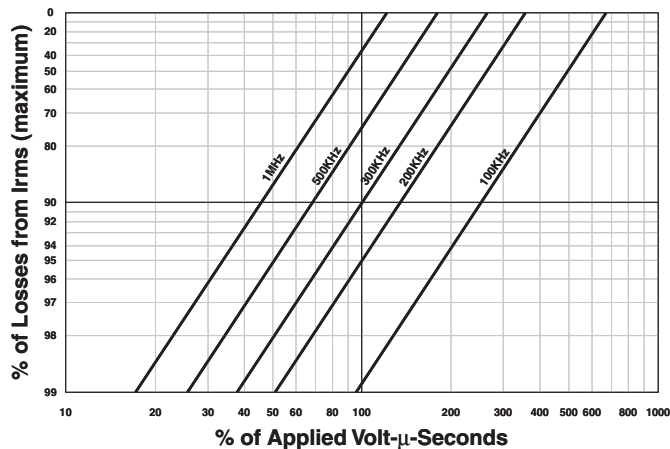

**Visit us on the Web at [www.cooperbussmann.com](http://www.cooperbussmann.com)**

**1225 Broken Sound Pkwy. Suite F Boca Raton, FL 33487**

**Tel: +1-561-998-4100 Toll Free: +1-888-414-2645 Fax: +1-561-241-6640**

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.