



PRECISION LOW NOISE QUAD OPERATIONAL AMPLIFIER

- LOW INPUT OFFSET VOLTAGE **950 μ V max.**
- LOW VOLTAGE NOISE : **4.5nV/ \sqrt Hz**
- HIGH GAIN BANDWIDTH PRODUCT : **15MHz**
- HIGH SLEW RATE : **7V/ μ s**
- LOW DISTORTION : 0.002%
- ESD INTERNAL PROTECTION 2kV
- MACROMODEL INCLUDED IN THIS SPECIFICATION

DESCRIPTION

The TS524 is a monolithic quad operational amplifier particularly well-suited for audio applications. The TS524 offers a very low input offset voltage as well as low voltage noise (**4.5nV/ \sqrt Hz**) and high dynamic performances (15MHz gain bandwidth product, 7V/ μ s slew rate).



The output stage allows a large output voltage swing and symmetrical source and sink currents.

ORDER CODE


| Part Number | Temperature Range | Package | |
|-------------|-------------------|---------|---|
| | | N | D |
| TS524I | -40°C, +125°C | • | • |

N = Dual in Line Package (DIP)
D = Small Outline Package (SO) - also available in Tape & Reel (DT)

PIN CONNECTIONS (top view)

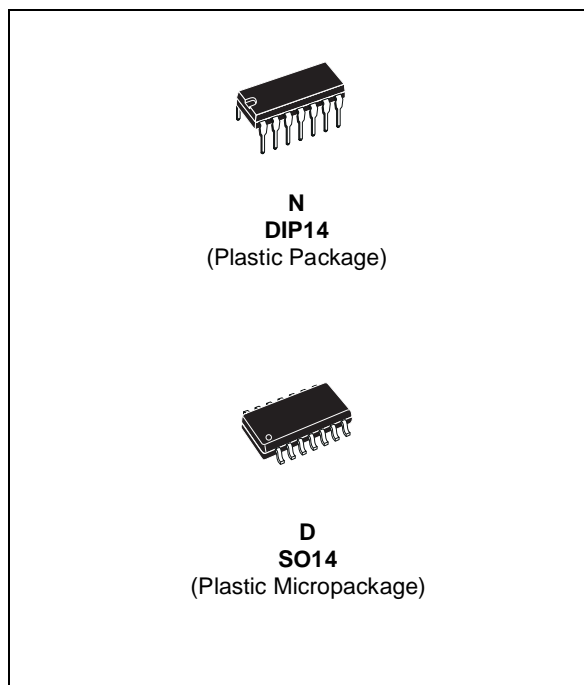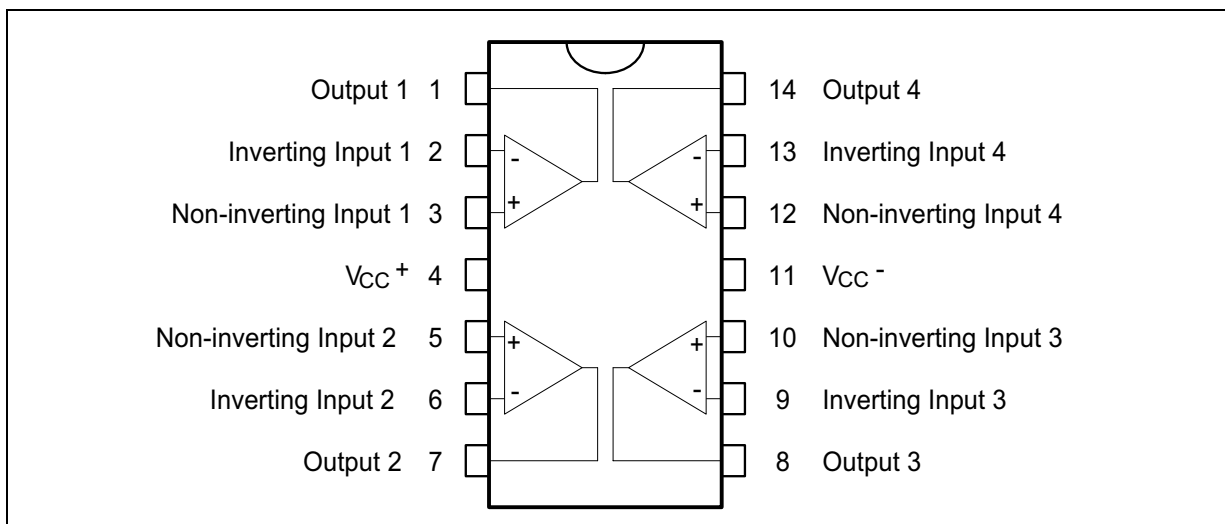

SCHEMATIC DIAGRAM (1/4 TS524)

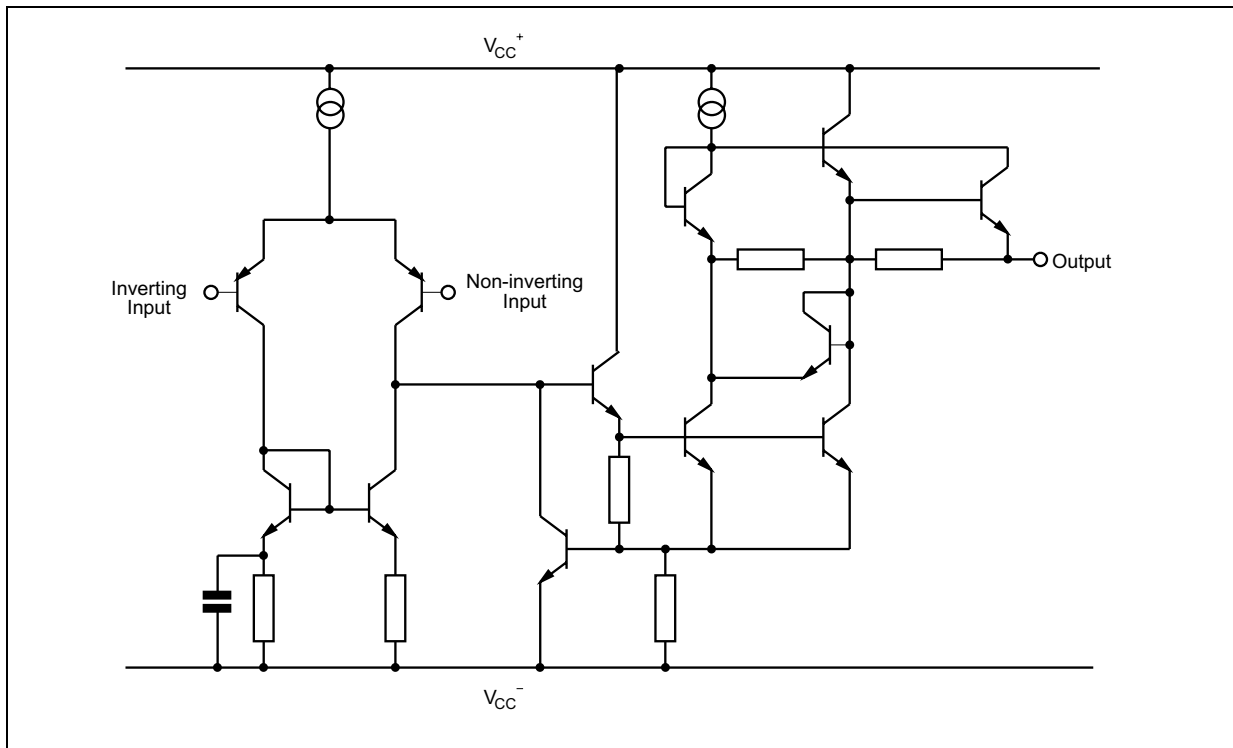

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|------------|---|----------------|------|
| V_{CC} | Supply Voltage | ± 18 to 36 | V |
| V_{id} | Differential Input Voltage ¹⁾ | ± 30 | V |
| V_i | Input Voltage (see note 1) | ± 15 | V |
| | Output Short-circuit Duration ²⁾ | Infinite | |
| T_{oper} | Operating Free-Air Temperature Range | -40 to +105 | °C |
| T_j | Maximum Junction Temperature | + 150 | °C |
| T_{stg} | Storage Temperature Range | -65 to +150 | °C |
| P_{tot} | Maximum Power Dissipation (see note 2) | 500 | mW |

1. Either or both input voltages must not exceed the magnitude of V_{CC}^+ or V_{CC}^-
2. Power dissipation must be considered to ensure maximum junction temperature (T_j) is not exceeded

OPERATING CONDITIONS

| Symbol | Parameter | Value | Unit |
|----------|----------------|-----------------------|------|
| V_{CC} | Supply Voltage | ± 2.5 to ± 15 | V |

ELECTRICAL CHARACTERISTICS
 $V_{CC}^+ = 15V$, $V_{CC}^- = -15V$, $T_{amb} = 25^\circ C$ (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|-----------------|--|--------------|---|--------------|------------------------|
| V_{io} | Input Offset Voltage ($V_o = 0V$, $V_{ic} = 0V$) $T_{min} \leq T_{amb} \leq T_{max}$ | | | 0.95 1.8 | mV |
| ΔV_{io} | Input Offset Voltage Drift $V_{ic} = 0V$, $V_o = 0V$, $T_{min} \leq T_{amb} \leq T_{max}$ | | 2 | | $\mu V/^\circ C$ |
| I_{io} | Input Offset Current ($V_{ic} = 0V$, $V_o = 0V$) $T_{amb} = +25^\circ C$ $T_{min} \leq T_{amb} \leq T_{max}$ | | 10 | 150 175 | nA |
| I_{ib} | Input Bias Current ($V_{ic} = 0V$, $V_o = 0V$) $T_{amb} = +25^\circ C$ $T_{min} \leq T_{amb} \leq T_{max}$ | | 250 | 750 800 | nA |
| V_{icm} | Common Mode Input Voltage Range ($\Delta V_{io} = 5mV$, $V_o = 0V$) | ± 13 | ± 14 | | V |
| A_{vd} | Large Signal Voltage Gain ($R_L = 2k\Omega$, $V_o = \pm 10V$) $T_{amb} = +25^\circ C$ $T_{min} \leq T_{amb} \leq T_{max}$ | 90 85 | 100 | | dB |
| $\pm V_{opp}$ | Output Voltage Swing ($V_{id} = \pm 1V$) $R_L = 600\Omega$ $R_L = 600\Omega$ $R_L = 2.0k\Omega$ $R_L = 2.0k\Omega$ $R_L = 10k\Omega$ $R_L = 10k\Omega$ | 13.2 13.5 | 12.2 -12.7 14 -14.2 14.3 -14.6 | -13.2 -14 | V |
| CMR | Common Mode Rejection Ratio ($V_{ic} = \pm 13V$) | 80 | 100 | | dB |
| SVR | Supply Voltage Rejection Ratio $V_{CC}^+/V_{CC}^- = +15V/-15V$ to $+5V/-5V$ | 80 | 105 | | dB |
| I_o | Output Short Circuit Current ($V_{id} = \pm 1V$, Output to ground) Source Sink | 15 20 | 29 37 | | mA |
| I_{cc} | Supply Current ($V_o = 0V$, All amplifiers) $T_{amb} = +25^\circ C$ $T_{min} \leq T_{amb} \leq T_{max}$ | | 8 | 10 12 | mA |
| SR | Slew Rate ($V_i = -10V$ to $+10V$, $R_L = 2k\Omega$, $C_L = 100pF$, $A_V = +1$) | 5 | 7 | | $V/\mu s$ |
| GBP | Gain Bandwidth Product ($f = 100kHz$, $R_L = 2k\Omega$, $C_L = 100pF$) | 10 | 15 | | MHz |
| B | Unity Gain Bandwidth (Open loop) | | 9 | | MHz |
| A_m | Gain Margin ($R_L = 2k\Omega$) $C_L = 0pF$ $C_L = 100pF$ | | -11 -6 | | dB |
| ϕ_m | Phase Margin $C_L = 0pF$ $C_L = 100pF$ | | 55 30 | | Degrees |
| e_n | Equivalent Input Noise Voltage ($R_s = 100\Omega$, $f = 1kHz$) | | 4.5 | | $\frac{nV}{\sqrt{Hz}}$ |
| i_n | Equivalent Input Noise current ($f = 1kHz$) | | 0.5 | | $\frac{pA}{\sqrt{Hz}}$ |
| THD | Total Harmonic Distortion $R_L = 2k\Omega$, $f = 20Hz$ to $20kHz$, $V_o = 3V_{rms}$, $A_V = +1$ | | 0.002 | | % |
| V_{o1}/V_{o2} | Channel Separation ($f = 20Hz$ to $20kHz$) | | 120 | | dB |
| FPB | Full Power Bandwidth ($V_o = 27V_{pp}$, $R_L = 2k\Omega$, $THD \leq 1\%$) | | 120 | | kHz |
| Z_o | Output Impedance ($V_o = 0V$, $f = 9MHz$) | | 37 | | Ω |
| R_i | Input Resistance ($V_{ic} = 0V$) | | 175 | | $k\Omega$ |
| C_i | Input Capacitance ($V_{ic} = 0V$) | | 12 | | pF |

MACROMODEL

** Standard Linear Ics Macromodels, 1993.

** CONNECTIONS :

- * 1 INVERTING INPUT
 - * 2 NON-INVERTING INPUT
 - * 3 OUTPUT
 - * 4 POSITIVE POWER SUPPLY
 - * 5 NEGATIVE POWER SUPPLY
- .SUBCKT TS524 1 3 2 4 5 (analog)

```
*****
.MODEL MDTH D IS=1E-8 KF=2.286238E-16
CJO=10F
* INPUT STAGE
CIP 2 5 1.200000E-11
CIN 1 5 1.200000E-11
EIP 10 5 2 5 1
EIN 16 5 1 5 1
RIP 10 11 2.363636E+00
RIN 15 16 2.363636E+00
RIS 11 15 1.224040E+01
DIP 11 12 MDTH 400E-12
DIN 15 14 MDTH 400E-12
VOFP 12 13 DC 0
VOFN 13 14 DC 0
IPOL 13 5 1.100000E-04
CPS 11 15 2.35E-09
DINN 17 13 MDTH 400E-12
VIN 17 5 1.000000E+00
DINR 15 18 MDTH 400E-12
VIP 4 18 1.000000E+00
FCP 4 5 VOFP 1.718182E+01
FCN 5 4 VOFN 1.718182E+01
FIBP 2 5 VOFN 4.545455E-03
FIBN 5 1 VOFP 4.545455E-03
* AMPLIFYING STAGE
FIP 5 19 VOFP 9.545455E+02
FIN 5 19 VOFN 9.545455E+02
CC 19 29 1.500000E-08
```

```
HZTP 30 29 VOFP 1.523529E+02
HZTN 5 30 VOFN 1.523529E+02
DOPM 51 22 MDTH 400E-12
DONM 21 52 MDTH 400E-12
HOPM 22 28 VOUT 5.172414E+03
VIPM 28 4 1.500000E+02
HONM 21 27 VOUT 4.054054E+03
VINM 5 27 1.500000E+02
DBIDON1 19 53 MDTH 400E-12
V1 51 53 0.68
DBIDON2 54 19 MDTH 400E-12
V2 54 52 0.68
RG11 51 5 3.04E+05
RG12 51 4 3.04E+05
RG21 52 5 0.6072E+05
RG22 52 4 0.6072E+05
E1 50 40 51 0 1 E2 40 39 52 0 1
EDEC1 38 39 4 0 0.5
EDEC2 0 38 5 0 0.5
DOP 51 25 MDTH 400E-12
VOP 4 25 1.474575E+00
DON 24 52 MDTH 400E-12
VON 24 5 1.474575E+00
RAJUS 50 5 1E12
GCOMP 5 4 4 5 8.1566068E-04
RPM1 5 80 1E+06
RPM2 4 80 1E+06
GAVPH 5 82 50 80 3.26E-03
RAVPHGH 82 4 613
RAVPHGB 82 5 613
RAVPHDH 82 83 1000
RAVPHDB 82 84 1000
CAVPHH 4 83 0.159E-09
CAVPHB 5 84 0.159E-09
EOUT 26 23 82 5 1
VOUT 23 5 0
ROUT 26 3 4.780354E+01
COUT 3 5 1.000000E-12
.ENDS
```


ELECTRICAL CHARACTERISTICS

V_{cc} = ±15V, T_{amb} = 25°C (unless otherwise specified)


| Symbol | Conditions | Value | Unit |
|---------------------|---|-------|---------|
| V _{io} | | 0 | mV |
| A _{vd} | R _L = 2kΩ, V _o = ±10V | 100 | dB |
| I _{cc} | No load, per operator | 2 | mA |
| V _{icm} | ΔV _{io} = 5mV, V _o = 0V | 28 | V |
| V _{opp} | R _L = 2kΩ | 28.2 | V |
| I _{sink} | V _o = 0V | 37 | mA |
| I _{source} | V _o = 0V | 29 | mA |
| GBP | R _L = 2kΩ, C _L = 100pF | 15 | MHz |
| SR | R _L = 2kΩ, C _L = 100pF, A _v = +1 | 7 | V/μs |
| ∅m | R _L = 2kΩ, C _L = 0pF | 55 | Degrees |




TOTAL SUPPLY CURRENT vs SUPPLY VOLTAGE

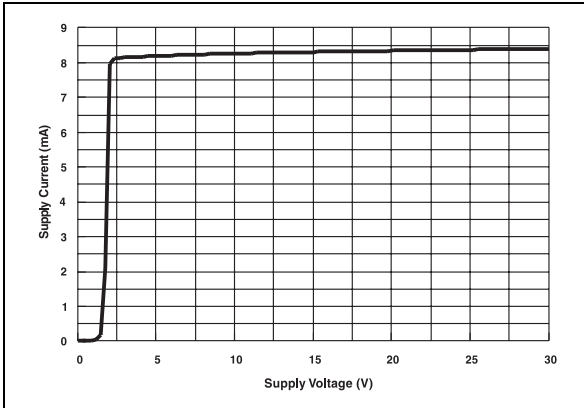


OUTPUT SHORT CIRCUIT CURRENT vs OUTPUT VOLTAGE

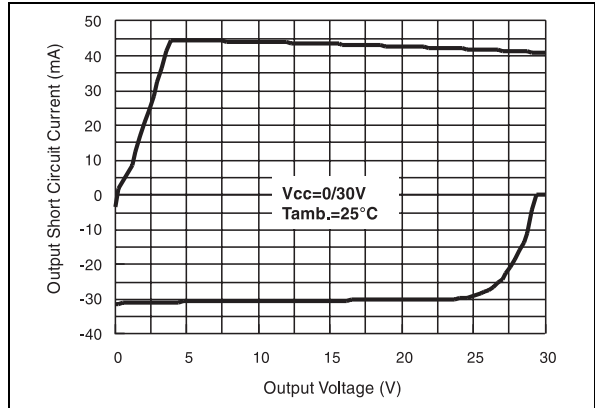


OUTPUT VOLTAGE vs SUPPLY VOLTAGE

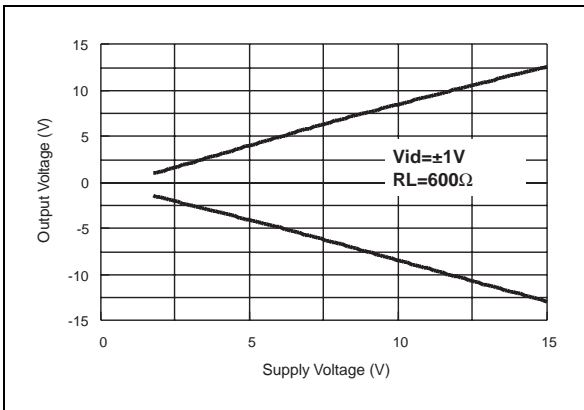


OUTPUT VOLTAGE vs SUPPLY VOLTAGE

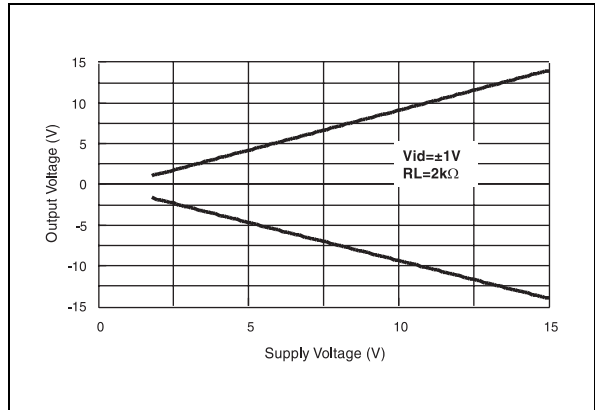


EQUIVALENT INPUT NOISE VOLTAGE vs FREQUENCY

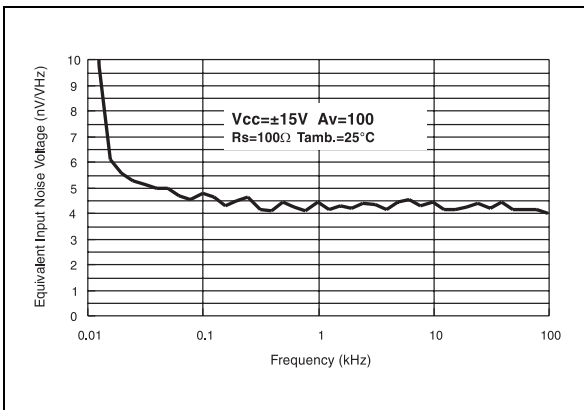


THD + NOISE vs FREQUENCY

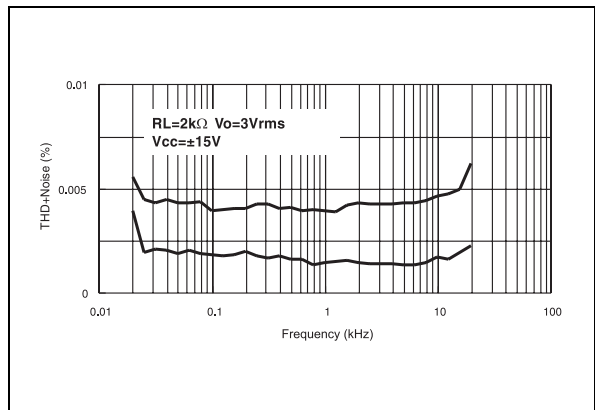


VOLTAGE GAIN AND PHASE vs FREQUENCY

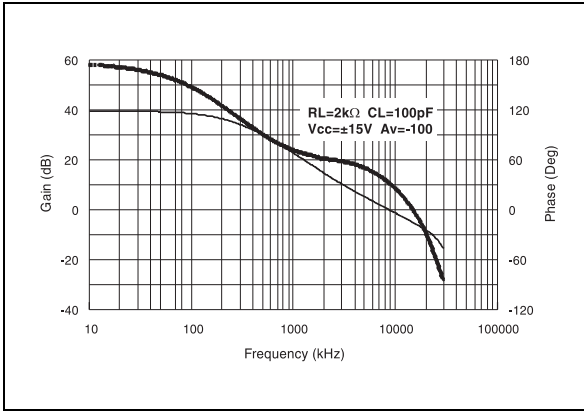

THD + NOISE vs V_{out}

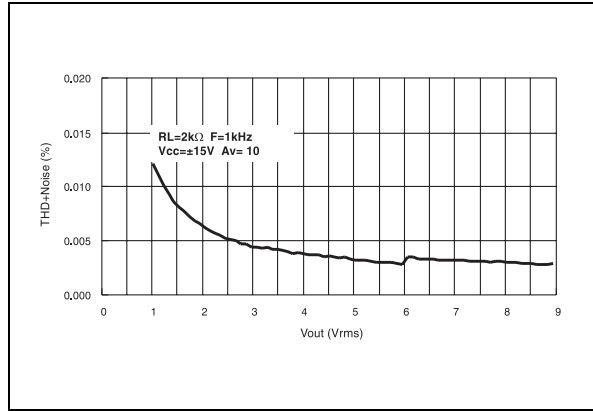


PACKAGE MECHANICAL DATA
14 PINS - PLASTIC DIP

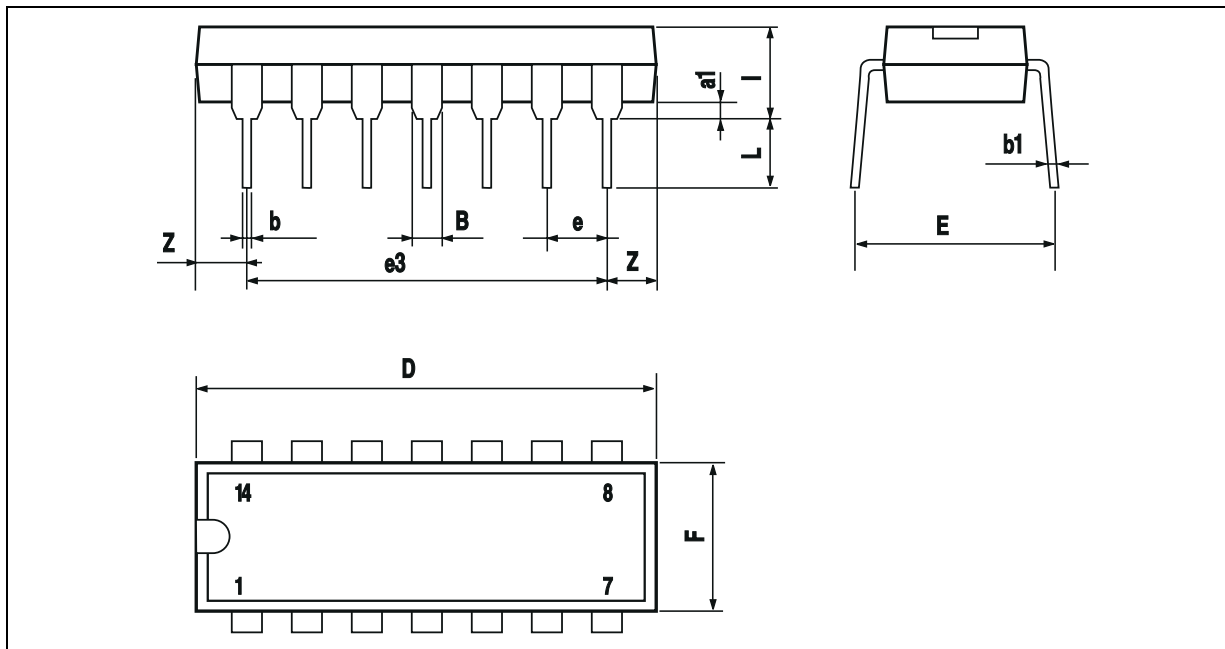

| Dim. | Millimeters | | | Inches | | |
|------|-------------|-------|------|--------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| a1 | 0.51 | | | 0.020 | | |
| B | 1.39 | | 1.65 | 0.055 | | 0.065 |
| b | | 0.5 | | | 0.020 | |
| b1 | | 0.25 | | | 0.010 | |
| D | | | 20 | | | 0.787 |
| E | | 8.5 | | | 0.335 | |
| e | | 2.54 | | | 0.100 | |
| e3 | | 15.24 | | | 0.600 | |
| F | | | 7.1 | | | 0.280 |
| i | | | 5.1 | | | 0.201 |
| L | | 3.3 | | | 0.130 | |
| Z | 1.27 | | 2.54 | 0.050 | | 0.100 |

PACKAGE MECHANICAL DATA
 14 PINS - PLASTIC MICROPACKAGE (SO)

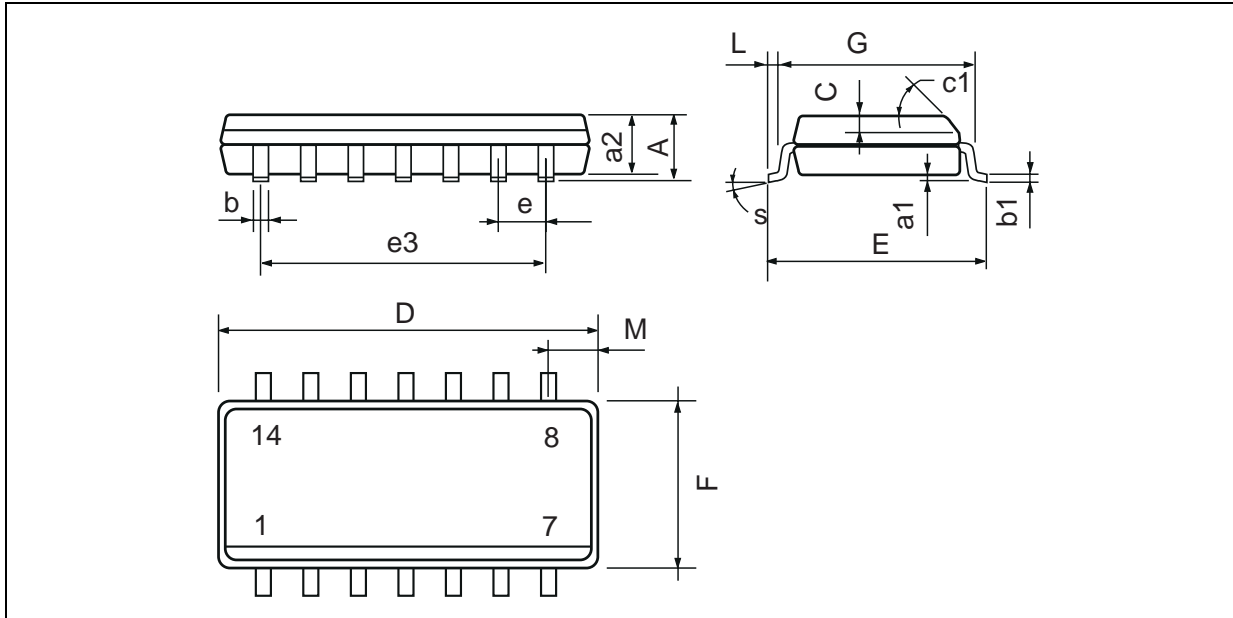

| Dim. | Millimeters | | | Inches | | |
|-------|-------------|------|------|--------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | | 1.75 | | | 0.069 |
| a1 | 0.1 | | 0.2 | 0.004 | | 0.008 |
| a2 | | | 1.6 | | | 0.063 |
| b | 0.35 | | 0.46 | 0.014 | | 0.018 |
| b1 | 0.19 | | 0.25 | 0.007 | | 0.010 |
| C | | 0.5 | | | 0.020 | |
| c1 | 45° (typ.) | | | | | |
| D (1) | 8.55 | | 8.75 | 0.336 | | 0.344 |
| E | 5.8 | | 6.2 | 0.228 | | 0.244 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 7.62 | | | 0.300 | |
| F (1) | 3.8 | | 4.0 | 0.150 | | 0.157 |
| G | 4.6 | | 5.3 | 0.181 | | 0.208 |
| L | 0.5 | | 1.27 | 0.020 | | 0.050 |
| M | | | 0.68 | | | 0.027 |
| S | 8° (max.) | | | | | |

Note : (1) D and F do not include mold flash or protrusions - Mold flash or protrusions shall not exceed 0.15mm (.066 inc) ONLY FOR DATA BOOK.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved
 STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia
 Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

© <http://www.st.com>