

## FEATURES

- **Sample Rate: 25Mps**
- **72.5dB SNR and 91dB SFDR (3.2V Range)**
- **71dB SNR and 96dB SFDR (2V Range)**
- No Missing Codes
- Single 5V Supply
- Low Power Dissipation: 380mW
- Selectable Input Ranges:  $\pm 1V$  or  $\pm 1.6V$
- 240MHz Full Power Bandwidth S/H
- Pin Compatible Family
  - 25 Mps: LTC1746 (14-Bit), LTC1745 (12-Bit)
  - 50 Mps: LTC1744 (14-Bit), LTC1743 (12-Bit)
  - 65 Mps: LTC1742 (14-Bit), LTC1741 (12-Bit)
  - 80 Mps: LTC1748 (14-Bit), LTC1747 (12-Bit)

## APPLICATIONS

- Telecommunications
- Medical Imaging
- Receivers
- Base Stations
- Spectrum Analysis
- Imaging Systems

 LTC and LT are registered trademarks of Linear Technology Corporation.

## DESCRIPTION

The LTC<sup>®</sup>1745 is a 25Mps, sampling 12-bit A/D converter designed for digitizing high frequency, wide dynamic range signals. Pin selectable input ranges of  $\pm 1V$  and  $\pm 1.6V$  along with a resistor programmable mode allow the LTC1745's input range to be optimized for a wide variety of applications.


The LTC1745 is perfect for demanding communications applications with AC performance that includes 72.5dB SNR and 91dB spurious free dynamic range. Ultralow jitter of 0.3ps<sub>RMS</sub> allows undersampling with excellent noise performance. DC specs include  $\pm 1$ LSB INL maximum and  $\pm 0.75$ LSB DNL over temperature.

The digital interface is compatible with 5V, 3V and 2V logic systems. The  $\overline{ENC}$  and  $\overline{ENC}$  inputs may be driven differentially from PECL, GTL and other low swing logic families or from single-ended TTL or CMOS. The low noise, high gain  $\overline{ENC}$  and  $\overline{ENC}$  inputs may also be driven by a sinusoidal signal without degrading performance. A separate digital output power supply can be operated from 0.5V to 5V, making it easy to connect directly to low voltage DSPs or FIFOs.

The TSSOP package with a flow-through pinout simplifies the board layout.

## BLOCK DIAGRAM

25Mps, 12-Bit ADC with a  $\pm 1V$  Differential Input Range

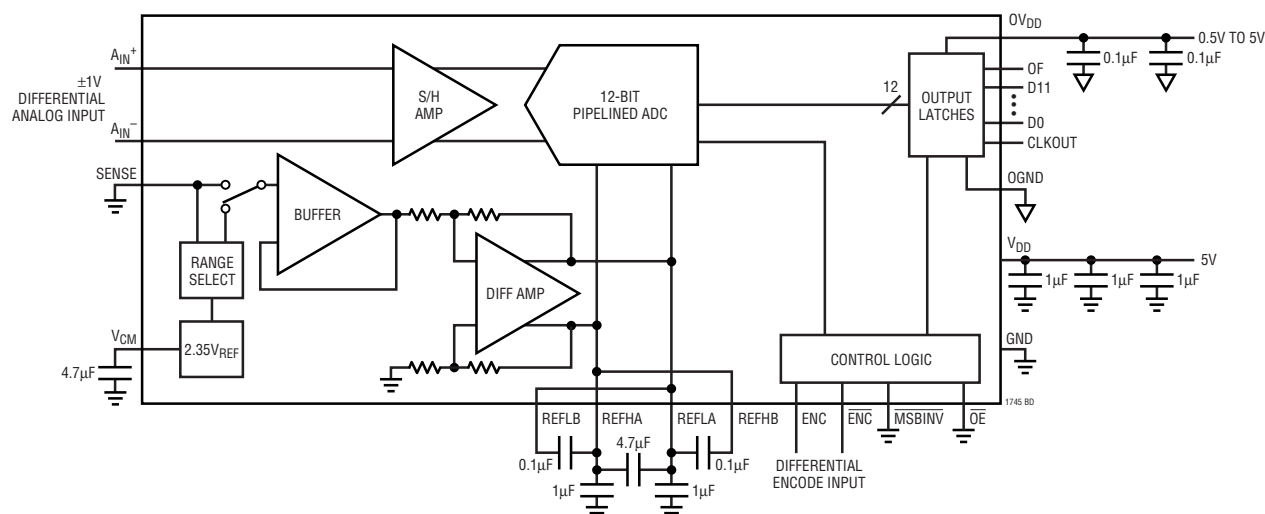

## ABSOLUTE MAXIMUM RATINGS

 $0V_{DD} = V_{DD}$  (Notes 1, 2)Supply Voltage ( $V_{DD}$ ) ..... 5.5VAnalog Input Voltage (Note 3) .... -0.3V to ( $V_{DD} + 0.3V$ )Digital Input Voltage (Note 4) .... -0.3V to ( $V_{DD} + 0.3V$ )Digital Output Voltage ..... -0.3V to ( $V_{DD} + 0.3V$ )

OGND Voltage ..... -0.3V to 1V

Power Dissipation ..... 2000mW

Operating Temperature Range

LTC1745C ..... 0°C to 70°C

LTC1745I ..... -40°C to 85°C

Storage Temperature Range ..... -65°C to 150°C

Lead Temperature (Soldering, 10 sec) ..... 300°C

## PACKAGE/ORDER INFORMATION

| TOP VIEW  |           | ORDER PART NUMBER        |
|---|-----------|--------------------------|
| SENSE 1   | 48 OF     | LTC1745CFW<br>LTC1745IFW |
| $V_{CM}$ 2  | 47 OGND   |                          |
| GND 3   | 46 D11    |                          |
| $A_{IN}^{+}$ 4  | 45 D10    |                          |
| $A_{IN}^{-}$ 5  | 44 D9     |                          |
| GND 6   | 43 OVDD   |                          |
| $V_{DD}$ 7  | 42 D8     |                          |
| $V_{DD}$ 8  | 41 D7     |                          |
| GND 9   | 40 D6     |                          |
| REFLB 10  | 39 D5     |                          |
| REFHA 11  | 38 OGND   |                          |
| GND 12  | 37 GND    |                          |
| GND 13  | 36 GND    |                          |
| REFLA 14  | 35 D4     |                          |
| REFHB 15  | 34 D3     |                          |
| GND 16  | 33 D2     |                          |
| $V_{DD}$ 17   | 32 OVDD   |                          |
| $V_{DD}$ 18   | 31 D1     |                          |
| GND 19  | 30 D0     |                          |
| $V_{DD}$ 20   | 29 NC     |                          |
| GND 21  | 28 NC     |                          |
| MSBINV 22   | 27 OGND   |                          |
| ENC 23  | 26 CLKOUT |                          |
| ENC 24  | 25 OE     |                          |
| FW PACKAGE<br>48-LEAD PLASTIC TSSOP                       |           |                          |
| $T_{JMAX} = 150^{\circ}C$ , $\theta_{JA} = 35^{\circ}C/W$ |           |                          |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## CONVERTER CHARACTERISTICS

The ● indicates specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^{\circ}C$ . (Note 5)

| PARAMETER                     | CONDITIONS                          | MIN   | TYP  | MAX  | UNITS  |
|-------------------------------|-------------------------------------|-------|------|------|--------|
| Resolution (No Missing Codes) | ●                                   | 12    |      |      | Bits   |
| Integral Linearity Error      | (Note 6) ●                          | -1    | ±0.4 | 1    | LSB    |
| Differential Linearity Error  | ●                                   | -0.75 | ±0.2 | 0.75 | LSB    |
| Offset Error                  | (Note 7) ●                          | -30   | ±5   | 30   | mV     |
| Gain Error                    | External Reference (SENSE = 1.6V) ● | -2.5  | ±1   | 2.5  | %FS    |
| Full-Scale Tempco             | $I_{OUT(REF)} = 0$                  |       | ±40  |      | ppm/°C |

## ANALOG INPUT

The ● indicates specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^{\circ}C$ . (Note 5)

| SYMBOL       | PARAMETER                                     | CONDITIONS   | MIN | TYP        | MAX | UNITS    |
|--------------|---|--|-----|------------|-----|----------|
| $V_{IN}$     | Analog Input Range (Note 8)                   | $4.75V \leq V_{DD} \leq 5.25V$ ●                                       |     | ±1 to ±1.6 |     | V        |
| $I_{IN}$     | Analog Input Leakage Current                  | ●  | -1  |            | 1   | μA       |
| $C_{IN}$     | Analog Input Capacitance                      | Sample Mode $ENC < \overline{ENC}$<br>Hold Mode $ENC > \overline{ENC}$ |     | 8<br>4     |     | pF<br>pF |
| $t_{ACQ}$    | Sample-and-Hold Acquisition Time              | ●  |     | 15         | 18  | ns       |
| $t_{AP}$     | Sample-and-Hold Acquisition Delay Time        |  |     | 0          |     | ns       |
| $t_{JITTER}$ | Sample-and-Hold Acquisition Delay Time Jitter |  |     | 0.3        |     | pSRMS    |
| CMRR         | Analog Input Common Mode Rejection Ratio      | $1.0V < (A_{IN}^{-} = A_{IN}^{+}) < 3.5V$                              |     | 80         |     | dB       |

1745f

## DYNAMIC ACCURACY

The ● indicates specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $A_{IN} = -1\text{dBFS}$ . (Note 5)

| SYMBOL    | PARAMETER                            | CONDITIONS   | MIN | TYP   | MAX | UNITS |
|-----------|--------------------------------------|--|-----|-------|-----|-------|
| SNR       | Signal-to-Noise Ratio                | 5MHz Input Signal (2V Range)                                     |     | 71    |     | dBFS  |
|           |                                      | 5MHz Input Signal (3.2V Range) ●                                 | 71  | 72.5  |     | dBFS  |
|           |                                      | 30MHz Input Signal (2V Range)                                    |     | 71    |     | dBFS  |
|           |                                      | 30MHz Input Signal (3.2V Range)                                  |     | 72    |     | dBFS  |
|           |                                      | 70MHz Input Signal (2V Range)                                    |     | 70    |     | dBFS  |
|           |                                      | 70MHz Input Signal (3.2V Range)                                  |     | 71.5  |     | dBFS  |
| SFDR      | Spurious Free Dynamic Range          | 5MHz Input Signal (2V Range)                                     |     | 96    |     | dB    |
|           |                                      | 5MHz Input Signal (3.2V Range) ●                                 | 78  | 91    |     | dB    |
|           |                                      | 30MHz Input Signal (2V Range)                                    |     | 93.5  |     | dB    |
|           |                                      | 30MHz Input Signal (3.2V Range)                                  |     | 87    |     | dB    |
|           |                                      | 70MHz Input Signal (2V Range)                                    |     | 79    |     | dB    |
|           |                                      | 70MHz Input Signal (3.2V Range)                                  |     | 70.5  |     | dB    |
| S/(N + D) | Signal-to-(Noise + Distortion) Ratio | 5MHz Input Signal (2V Range)                                     |     | 71    |     | dBFS  |
|           |                                      | 5MHz Input Signal (3.2V Range) ●                                 | 71  | 72.5  |     | dBFS  |
|           |                                      | 30MHz Input Signal (2V Range)                                    |     | 71    |     | dBFS  |
|           |                                      | 30MHz Input Signal (3.2V Range)                                  |     | 72    |     | dBFS  |
|           |                                      | 70MHz Input Signal (2V Range)                                    |     | 69.5  |     | dBFS  |
|           |                                      | 70MHz Input Signal (3.2V Range)                                  |     | 68.5  |     | dBFS  |
| THD       | Total Harmonic Distortion            | 5MHz Input Signal, First 5 Harmonics (2V Range)                  |     | -92   |     | dB    |
|           |                                      | 5MHz Input Signal, First 5 Harmonics (3.2V Range)                |     | -90   |     | dB    |
|           |                                      | 30MHz Input Signal, First 5 Harmonics (2V Range)                 |     | -91.5 |     | dB    |
|           |                                      | 30MHz Input Signal, First 5 Harmonics (3.2V Range)               |     | -86.5 |     | dB    |
|           |                                      | 70MHz Input Signal, First 5 Harmonics (2V Range)                 |     | -77.5 |     | dB    |
|           |                                      | 70MHz Input Signal, First 5 Harmonics (3.2V Range)               |     | -70   |     | dB    |
| IMD       | Intermodulation Distortion           | $f_{IN1} = 4\text{MHz}$ , $f_{IN2} = 5.1\text{MHz}$ (2V Range)   |     | 85    |     | dBc   |
|           |                                      | $f_{IN1} = 4\text{MHz}$ , $f_{IN2} = 5.1\text{MHz}$ (3.2V Range) |     | 84    |     | dBc   |
|           | Sample-and-Hold Bandwidth            | $R_{SOURCE} = 50\Omega$  |     | 240   |     | MHz   |

## INTERNAL REFERENCE CHARACTERISTICS (Note 5)

| PARAMETER                  | CONDITIONS                                   | MIN  | TYP      | MAX  | UNITS                 |
|----------------------------|--|------|----------|------|-----------------------|
| $V_{CM}$ Output Voltage    | $I_{OUT} = 0$                                | 2.29 | 2.35     | 2.41 | V                     |
| $V_{CM}$ Output Tempco     | $I_{OUT} = 0$                                |      | $\pm 30$ |      | ppm/ $^\circ\text{C}$ |
| $V_{CM}$ Line Regulation   | $4.75\text{V} \leq V_{DD} \leq 5.25\text{V}$ |      | 3        |      | mV/V                  |
| $V_{CM}$ Output Resistance | $1\text{mA} \leq  I_{OUT}  \leq 1\text{mA}$  |      | 4        |      | $\Omega$              |

## DIGITAL INPUTS AND DIGITAL OUTPUTS

The ● indicates specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| SYMBOL       | PARAMETER                     | CONDITIONS  | MIN   | TYP  | MAX      | UNITS         |
|--------------|-------------------------------|---|-------|------|----------|---------------|
| $V_{IH}$     | High Level Input Voltage      | $V_{DD} = 5.25\text{V}$   | ● 2.4 |      |          | V             |
| $V_{IL}$     | Low Level Input Voltage       | $V_{DD} = 4.75\text{V}$   | ●     |      | 0.8      | V             |
| $I_{IN}$     | Digital Input Current         | $V_{IN} = 0\text{V to } V_{DD}$   | ●     |      | $\pm 10$ | $\mu\text{A}$ |
| $C_{IN}$     | Digital Input Capacitance     | $\overline{\text{MSBINV}}$ and $\overline{\text{OE}}$ Only              |       | 1.5  |          | pF            |
| $V_{OH}$     | High Level Output Voltage     | $OV_{DD} = 4.75\text{V}$  |       | 4.74 |          | V             |
|              |                               | $I_O = -10\mu\text{A}$  |       |      |          |               |
| $V_{OL}$     | Low Level Output Voltage      | $OV_{DD} = 4.75\text{V}$  | ● 4   |      |          | V             |
|              |                               | $I_O = -200\mu\text{A}$   |       |      |          |               |
|              |                               | $I_O = 160\mu\text{A}$  |       | 0.05 |          | V             |
| $I_{OZ}$     | Hi-Z Output Leakage D11 to D0 | $V_{OUT} = 0\text{V to } V_{DD}$ , $\overline{\text{OE}} = \text{High}$ | ●     |      | $\pm 10$ | $\mu\text{A}$ |
|              |                               | $\overline{\text{OE}} = \text{High}$ (Note 8)                           | ●     |      | 15       | pF            |
| $I_{SOURCE}$ | Output Source Current         | $V_{OUT} = 0\text{V}$   |       | -50  |          | mA            |
| $I_{SINK}$   | Output Sink Current           | $V_{OUT} = 5\text{V}$   |       | 50   |          | mA            |

## POWER REQUIREMENTS

The ● indicates specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| SYMBOL    | PARAMETER                     | CONDITIONS                 | MIN  | TYP | MAX      | UNITS |
|-----------|-------------------------------|----------------------------|------|-----|----------|-------|
| $V_{DD}$  | Positive Supply Voltage       |                            | 4.75 |     | 5.25     | V     |
| $I_{DD}$  | Positive Supply Current       | 2V Range, Full-Scale Input | ●    | 76  | 91       | mA    |
| $P_{DIS}$ | Power Dissipation             | 2V Range, Full-Scale Input | ●    | 380 | 455      | mW    |
| $OV_{DD}$ | Digital Output Supply Voltage |                            | 0.5  |     | $V_{DD}$ | V     |

## TIMING CHARACTERISTICS

The ● indicates specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 5)

| SYMBOL       | PARAMETER  | CONDITIONS                   | MIN   | TYP | MAX  | UNITS  |
|--------------|--|------------------------------|-------|-----|------|--------|
| $f_{SAMPLE}$ | Sampling Frequency                                       | (Note 9)                     | ● 1   |     | 25   | MHz    |
| $t_1$        | ENC Low Time   | (Note 9)                     | ● 19  | 20  | 1000 | ns     |
| $t_2$        | ENC High Time  | (Note 9)                     | ● 19  | 20  | 1000 | ns     |
| $t_3$        | Aperture Delay of Sample-and-Hold                        |                              |       | 0   |      | ns     |
| $t_4$        | ENC to Data Delay  | $C_L = 10\text{pF}$ (Note 8) | ● 1.4 | 4   | 10   | ns     |
| $t_5$        | ENC to CLKOUT Delay                                      | $C_L = 10\text{pF}$ (Note 8) | ● 0.5 | 2   | 5    | ns     |
| $t_6$        | CLKOUT to Data Delay                                     | $C_L = 10\text{pF}$ (Note 8) | ● 0   | 2   |      | ns     |
| $t_7$        | DATA Access Time After $\overline{\text{OE}} \downarrow$ | $C_L = 10\text{pF}$ (Note 8) |       | 10  | 25   | ns     |
| $t_8$        | BUS Relinquish Time                                      | (Note 8)                     |       | 10  | 25   | ns     |
|              | Data Latency   |                              |       | 5   |      | cycles |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** All voltage values are with respect to ground with GND (unless otherwise noted).

**Note 3:** When these pin voltages are taken below GND or above  $V_{DD}$ , they will be clamped by internal diodes. This product can handle input currents of greater than 100mA below GND or above  $V_{DD}$  without latchup.

**Note 4:** When these pin voltages are taken below GND, they will be clamped by internal diodes. This product can handle input currents of >100mA below GND without latchup. These pins are not clamped to  $V_{DD}$ .

**Note 5:**  $V_{DD} = 5\text{V}$ ,  $f_{SAMPLE} = 25\text{MHz}$ , differential ENC/ $\overline{\text{ENC}} = 2V_{P-P}$  25MHz sine wave, input range =  $\pm 1.6\text{V}$  differential, unless otherwise specified.

**Note 6:** Integral nonlinearity is defined as the deviation of a code from a straight line passing through the actual endpoints of the transfer curve. The deviation is measured from the center of the quantization band.


**Note 7:** Bipolar offset is the offset voltage measured from -0.5 LSB when the output code flickers between 0000 0000 0000 and 1111 1111 1111.

**Note 8:** Guaranteed by design, not subject to test.

**Note 9:** Recommended operating conditions.


## TYPICAL PERFORMANCE CHARACTERISTICS

Typical INL

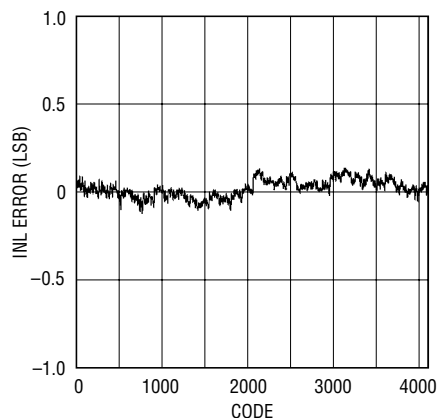


1745 G01


Typical DNL

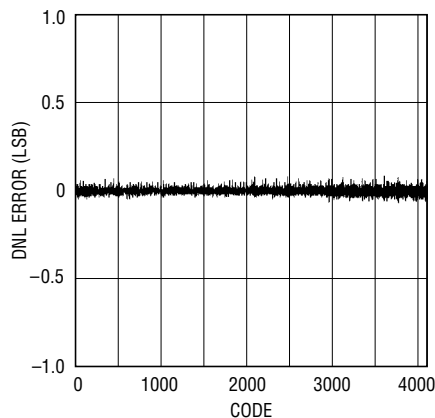


1745 G02

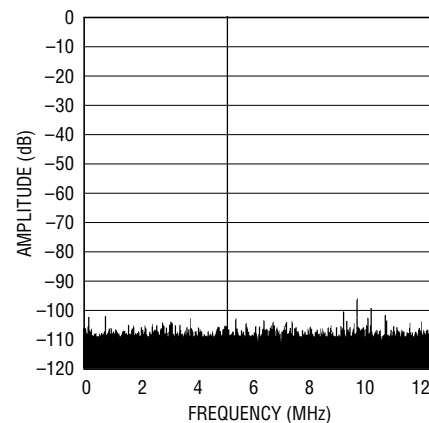Nonaveraged, 32768 Point FFT,  
Input Frequency = 5MHz,  
3.2V Range


1745 G03

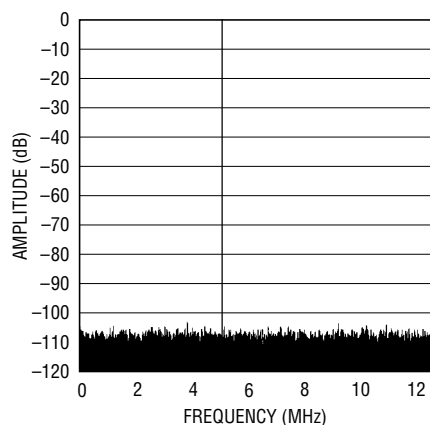Nonaveraged, 32768 Point FFT,  
Input Frequency = 5MHz,  
2V Range


1745 G04

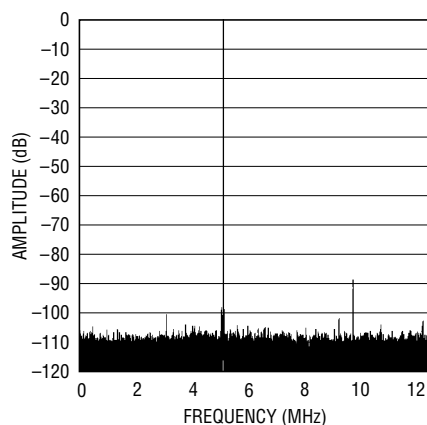Nonaveraged, 32768 Point FFT,  
Input Frequency = 30MHz,  
3.2V Range


1745 G05

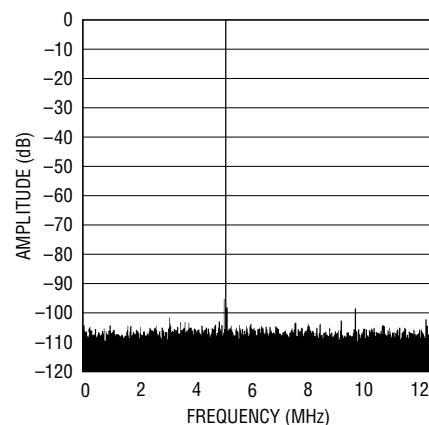Nonaveraged, 32768 Point FFT,  
Input Frequency = 30MHz,  
2V Range


1745 G06

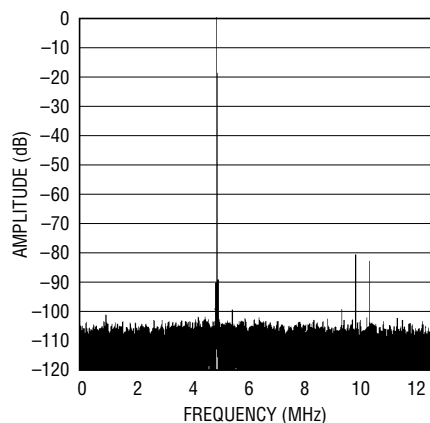Nonaveraged, 32768 Point FFT,  
Input Frequency = 70MHz,  
2V Range

1745 G07

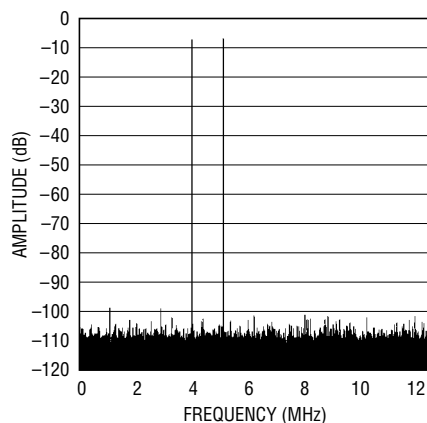Nonaveraged, 32768 Point  
2-Tone FFT, Input Frequency =  
4MHz and 5.1MHz, 3.2V Range

1745 G08

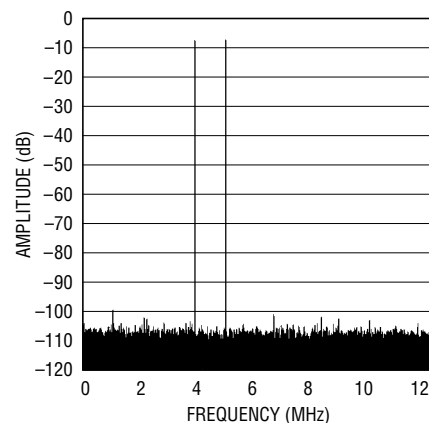
Nonaveraged, 32768 Point  
2-Tone FFT, Input Frequency =  
4MHz and 5.1MHz, 2V Range

1745 G09


1745f

## TYPICAL PERFORMANCE CHARACTERISTICS


Grounded Input Histogram

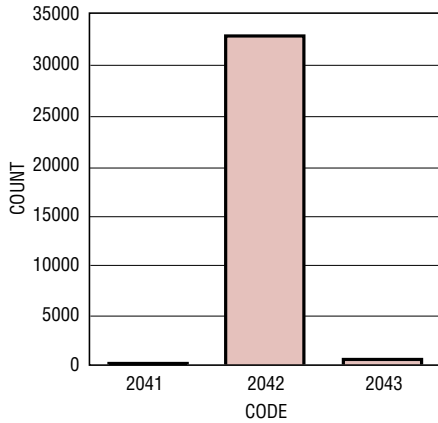


1745 G10

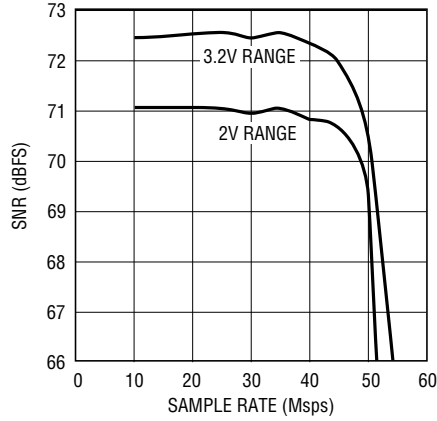SNR vs Sample Rate,  
Input Frequency = 5MHz, -1dB


1745 G11

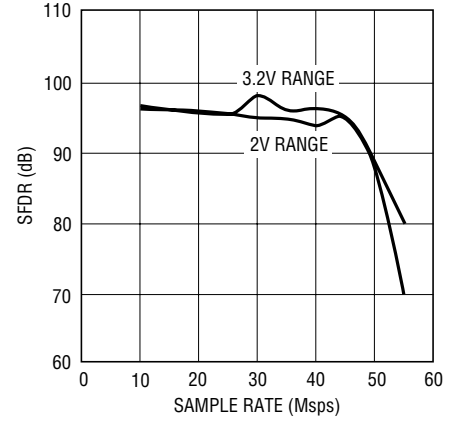SFDR vs Sample Rate,  
Input Frequency = 5MHz, -1dB


1745 G12

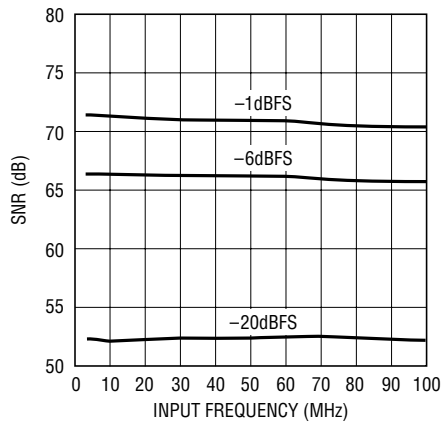SNR vs Input Frequency and  
Amplitude 3.2V Range


1745 G13

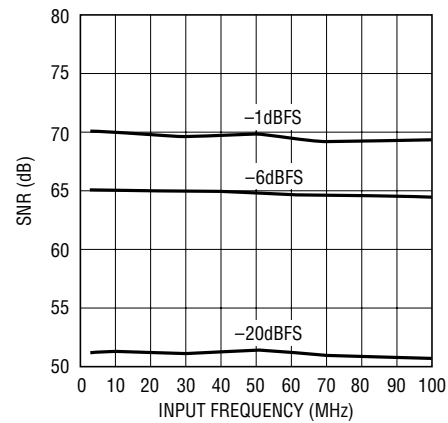SNR vs Input Frequency and  
Amplitude 2V Range

1745 G14

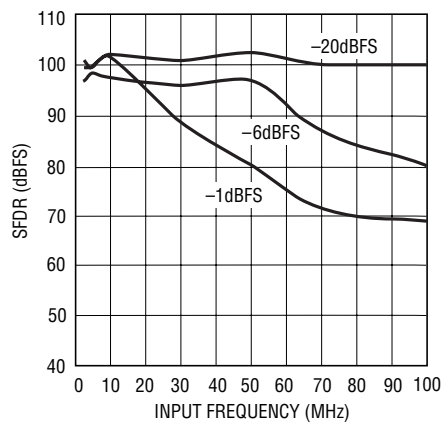SFDR vs Input Frequency  
and Amplitude, 3.2V Range


1746 G15

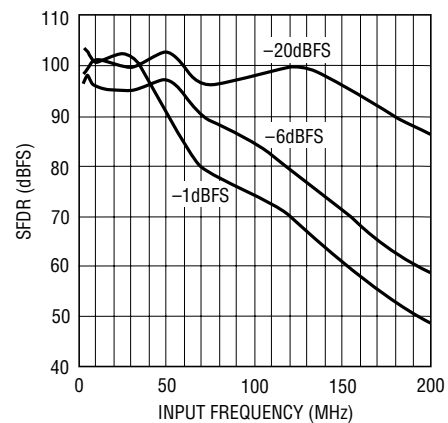SFDR vs Input Frequency  
and Amplitude, 2V Range

1745 G16


# TYPICAL PERFORMANCE CHARACTERISTICS

2nd and 3rd Harmonic vs Input Frequency, 3.2V Range, -1dB

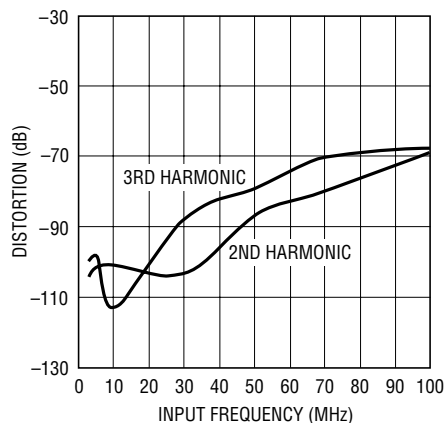


1745 G17

2nd and 3rd Harmonic vs Input Frequency, 2V Range, -1dB

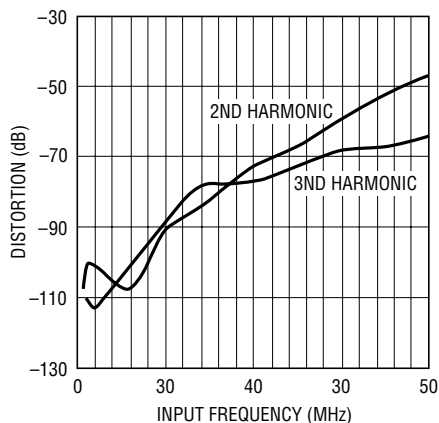


1745 G18

Worst Harmonic 4th or Higher vs Input Frequency, 3.2V Range, -1dB

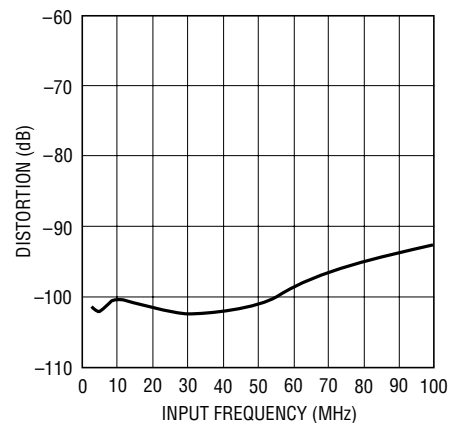


1746 G19

Worst Harmonic 4th or Higher vs Input Frequency, 2V Range, -1dB

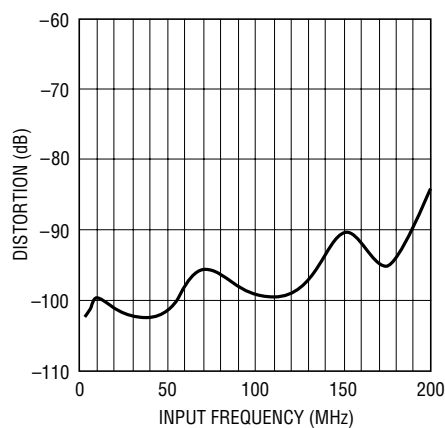


1745 G20

SFDR vs Input Amplitude, 2V Range, 5MHz Input Frequency

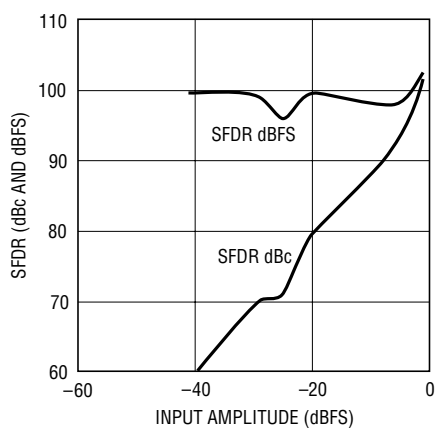

1745 G21

Power vs Sample Rate, Input Frequency = 5MHz

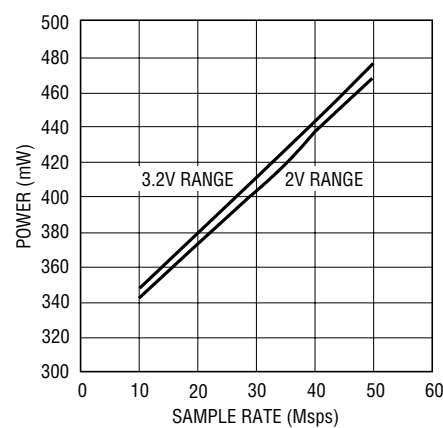

1745 G22

## PIN FUNCTIONS

**SENSE (Pin 1):** Reference Sense Pin. Ground selects  $\pm 1V$ .  $V_{DD}$  selects  $\pm 1.6V$ . Greater than 1V and less than 1.6V applied to the SENSE pin selects an input range of  $\pm V_{SENSE}$ ,  $\pm 1.6V$  is the largest valid input range.

**$V_{CM}$  (Pin 2):** 2.35V Output and Input Common Mode Bias. Bypass to ground with 4.7 $\mu F$  ceramic chip capacitor.

**GND (Pins 3, 6, 9, 12, 13, 16, 19, 21, 36, 37):** ADC Power Ground.

**$A_{IN}^+$  (Pin 4):** Positive Differential Analog Input.

**$A_{IN}^-$  (Pin 5):** Negative Differential Analog Input.

**$V_{DD}$  (Pins 7, 8, 17, 18, 20):** 5V Supply. Bypass to GND with 1 $\mu F$  ceramic chip capacitor.

**REFLB (Pin 10):** ADC Low Reference. Bypass to Pin 11 with 0.1 $\mu F$  ceramic chip capacitor. Do not connect to Pin 14.

**REFHA (Pin 11):** ADC High Reference. Bypass to Pin 10 with 0.1 $\mu F$  ceramic chip capacitor, to Pin 14 with a 4.7 $\mu F$  ceramic capacitor and to ground with 1 $\mu F$  ceramic capacitor.

**REFLA (Pin 14):** ADC Low Reference. Bypass to Pin 15 with 0.1 $\mu F$  ceramic chip capacitor, to Pin 11 with a 4.7 $\mu F$  ceramic capacitor and to ground with 1 $\mu F$  ceramic capacitor.

**REFHB (Pin 15):** ADC High Reference. Bypass to Pin 14 with 0.1 $\mu F$  ceramic chip capacitor. Do not connect to Pin 11.

**MSBINV (Pin 22):** MSB Inversion Control. Low inverts the MSB, 2's complement output format. High does not invert the MSB, offset binary output format.

**ENC (Pin 23):** Encode Input. The input sample starts on the positive edge.

**ENC (Pin 24):** Encode Complement Input. Conversion starts on the negative edge. Bypass to ground with 0.1 $\mu F$  ceramic for single-ended encode signal.

**OE (Pin 25):** Output Enable. Low enables outputs. Logic high makes outputs Hi-Z.

**CLKOUT (Pin 26):** Data Valid Output. Latch data on the rising edge of CLKOUT.

**OGND (Pins 27, 38, 47):** Output Driver Ground.

**NC (Pins 28, 29):** Do Not Connect These Pins.

**D0-D1 (Pins 30, 31):** Digital Outputs. D0 is the LSB.

**$OV_{DD}$  (Pins 32, 43):** Positive Supply for the Output Drivers. Bypass to ground with 0.1 $\mu F$  ceramic chip capacitor.

**D2-D4 (Pins 33 to 35):** Digital Outputs.


**D5-D8 (Pins 39 to 42):** Digital Outputs.

**D9-D11 (Pins 44 to 46):** Digital Outputs. D11 is the MSB.


**OF (Pin 48):** Over/Under Flow Output. High when an over or under flow has occurred.



## TIMING DIAGRAM

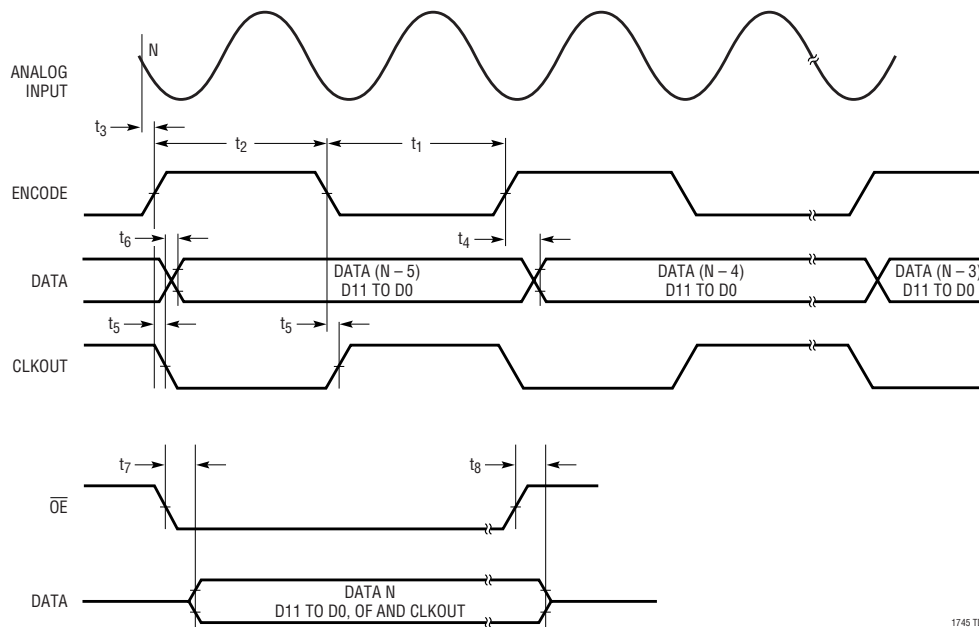

## FUNCTIONAL BLOCK DIAGRAM

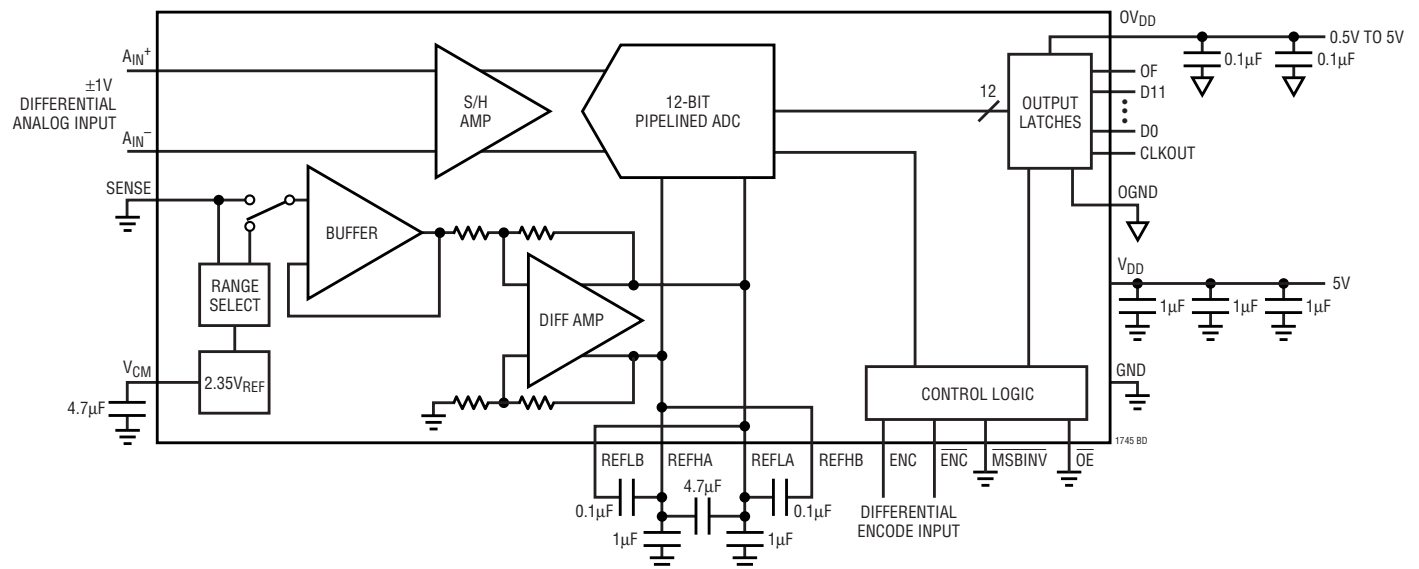

## APPLICATIONS INFORMATION

### DYNAMIC PERFORMANCE

#### Signal-to-Noise Plus Distortion Ratio

The signal-to-noise plus distortion ratio  $[S / (N + D)]$  is the ratio between the RMS amplitude of the fundamental input frequency and the RMS amplitude of all other frequency components at the ADC output. The output is band limited to frequencies above DC to below half the sampling frequency.

#### Signal-to-Noise Ratio

The signal-to-noise ratio (SNR) is the ratio between the RMS amplitude of the fundamental input frequency and the RMS amplitude of all other frequency components except the first five harmonics and DC.

#### Total Harmonic Distortion

Total harmonic distortion is the ratio of the RMS sum of all harmonics of the input signal to the fundamental itself. The out-of-band harmonics alias into the frequency band between DC and half the sampling frequency. THD is expressed as:

$$THD = 20 \log \frac{\sqrt{V_2^2 + V_3^2 + V_4^2 + \dots V_n^2}}{V_1}$$

where  $V_1$  is the RMS amplitude of the fundamental frequency and  $V_2$  through  $V_n$  are the amplitudes of the second through  $n$ th harmonics. The THD calculated in this data sheet uses all the harmonics up to the fifth.

#### Intermodulation Distortion

If the ADC input signal consists of more than one spectral component, the ADC transfer function nonlinearity can produce intermodulation distortion (IMD) in addition to THD. IMD is the change in one sinusoidal input caused by the presence of another sinusoidal input at a different frequency.

If two pure sine waves of frequencies  $f_a$  and  $f_b$  are applied to the ADC input, nonlinearities in the ADC transfer function can create distortion products at the sum and difference frequencies of  $m f_a \pm n f_b$ , where  $m$  and  $n = 0, 1, 2, 3$ , etc. The 3rd order intermodulation products are  $2f_a + f_b$ ,  $2f_b + f_a$ ,  $2f_a - f_b$  and  $2f_b - f_a$ . The intermodulation distortion is defined as the ratio of the RMS value of either input tone to the RMS value of the largest 3rd order intermodulation product.

#### Spurious Free Dynamic Range (SFDR)

Spurious free dynamic range is the peak harmonic or spurious noise that is the largest spectral component excluding the input signal and DC. This value is expressed in decibels relative to the RMS value of a full scale input signal.

#### Input Bandwidth

The input bandwidth is that input frequency at which the amplitude of the reconstructed fundamental is reduced by 3dB for a full scale input signal.

#### Aperture Delay Time

The time from when a rising ENC equals the  $\overline{ENC}$  voltage to the instant that the input signal is held by the sample and hold circuit.

#### Aperture Delay Jitter

The variation in the aperture delay time from conversion to conversion. This random variation will result in noise when sampling an AC input. The signal to noise ratio due to the jitter alone will be:

$$SNR_{JITTER} = -20 \log (2\pi) \cdot F_{IN} \cdot T_{JITTER}$$



## APPLICATIONS INFORMATION

When ENC is low, the analog input is sampled differentially directly onto the input sample-and-hold capacitors, inside the “Input S/H” shown in the block diagram. At the instant that ENC transitions from low to high, the sampled input is held. While ENC is high, the held input voltage is buffered by the S/H amplifier which drives the first pipelined ADC stage. The first stage acquires the output of the S/H during this high phase of ENC. When ENC goes back low, the first stage produces its residue which is acquired by the second stage. At the same time, the input S/H goes back to acquiring the analog input. When ENC goes back high, the second stage produces its residue which is acquired by the third stage. An identical process is repeated for the third stage, resulting in a third stage residue that is sent to the fourth stage ADC for final evaluation.

Each ADC stage following the first has additional range to accommodate flash and amplifier offset errors. Results from all of the ADC stages are digitally delayed such that the results can be properly combined in the correction logic before being sent to the output buffer.

### SAMPLE/HOLD OPERATION AND INPUT DRIVE

#### Sample Hold Operation

Figure 2 shows an equivalent circuit for the LTC1745 CMOS differential sample-and-hold. The differential analog inputs are sampled directly onto sampling capacitors ( $C_{SAMPLE}$ ) through CMOS transmission gates. This direct capacitor sampling results in the lowest possible noise for a given sampling capacitor size. The capacitors shown attached to each input ( $C_{PARASITIC}$ ) are the summation of all other capacitance associated with each input.

During the sample phase when  $\overline{ENC}/ENC$  is low, the transmission gate connects the analog inputs to the sampling capacitors, and they charge to and track the differential input voltage. When  $\overline{ENC}/ENC$  transitions from low to high the sampled input voltage is held on the sampling capacitors. During the hold phase when  $\overline{ENC}/ENC$  is high the sampling capacitors are disconnected from the input and the held voltage is passed to the ADC core for processing. As  $\overline{ENC}/ENC$  transitions from high to low the inputs are reconnected to the sampling capacitors to

acquire a new sample. Since the sampling capacitors still hold the previous sample, a charging glitch proportional to the change in voltage between samples will be seen at this time. If the change between the last sample and the new sample is small the charging glitch seen at the input will be small. If the input change is large, such as the change seen with input frequencies near Nyquist, then a larger charging glitch will be seen.

#### Common Mode Bias

The ADC sample-and-hold circuit requires differential drive to achieve specified performance. Each input should swing  $\pm 0.8V$  for the 3.2V range or  $\pm 0.5V$  for the 2V range, around a common mode voltage of 2.35V. The  $V_{CM}$  output pin (Pin 2) may be used to provide the common mode bias level.  $V_{CM}$  can be tied directly to the center tap of a transformer to set the DC input level or as a reference level to an op amp differential driver circuit. The  $V_{CM}$  pin must be bypassed to ground close to the ADC with 4.7 $\mu F$  or greater capacitor.

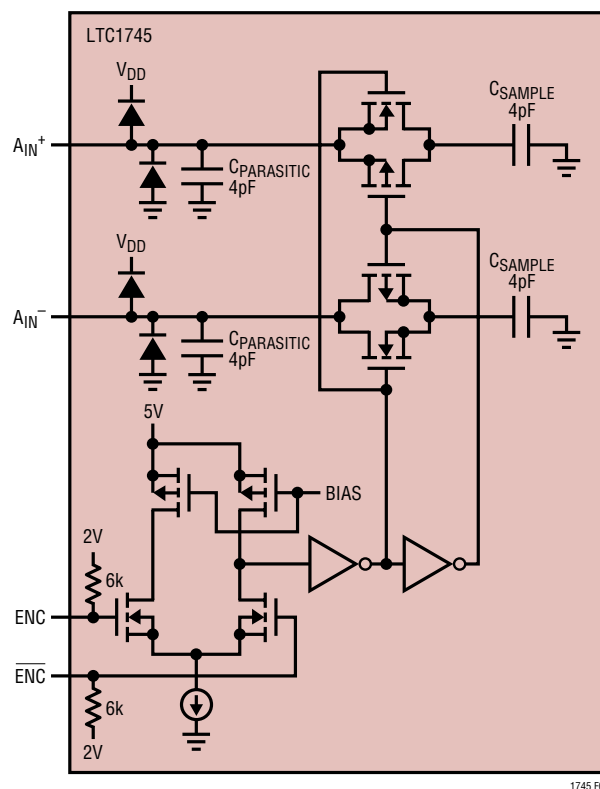


Figure 2. Equivalent Input Circuit

## APPLICATIONS INFORMATION

### Input Drive Impedance

As with all high performance, high speed ADCs the dynamic performance of the LTC1745 can be influenced by the input drive circuitry, particularly the second and third harmonics. Source impedance and input reactance can influence SFDR. At the falling edge of encode the sample-and-hold circuit will connect the 4pF sampling capacitor to the input pin and start the sampling period. The sampling period ends when encode rises, holding the sampled input on the sampling capacitor. Ideally the input circuitry should be fast enough to fully charge the sampling capacitor during the sampling period  $1/(2F_{\text{ENCODE}})$ ; however, this is not always possible and the incomplete settling may degrade the SFDR. The sampling glitch has been designed to be as linear as possible to minimize the effects of incomplete settling.

For the best performance, it is recommended to have a source impedance of  $100\Omega$  or less for each input. The S/H circuit is optimized for a  $50\Omega$  source impedance. If the source impedance is less than  $50\Omega$ , a series resistor should be added to increase this impedance to  $50\Omega$ . The source impedance should be matched for the differential inputs. Poor matching will result in higher even order harmonics, especially the second.

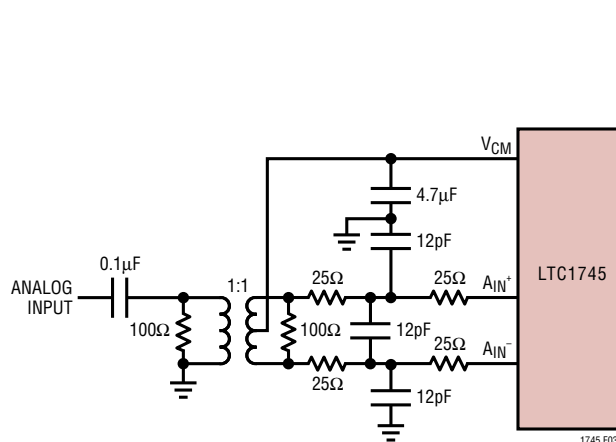


Figure 3. Single-Ended to Differential Conversion Using a Transformer

### Input Drive Circuits

Figure 3 shows the LTC1745 being driven by an RF transformer with a center tapped secondary. The secondary center tap is DC biased with  $V_{\text{CM}}$ , setting the ADC input signal at its optimum DC level. Figure 3 shows a 1:1 turns ratio transformer. Other turns ratios can be used if the source impedance seen by the ADC does not exceed  $100\Omega$  for each ADC input. A disadvantage of using a transformer is the loss of low frequency response. Most small RF transformers have poor performance at frequencies below 1MHz.

Figure 4 demonstrates the use of operational amplifiers to convert a single ended input signal into a differential input signal. The advantage of this method is that it provides low frequency input response; however, the limited gain bandwidth of most op amps will limit the SFDR at high input frequencies.

The  $25\Omega$  resistors and 12pF capacitors on the analog inputs serve two purposes: isolating the drive circuitry from the sample-and-hold charging glitches and limiting the wideband noise at the converter input. For input frequencies higher than 50MHz, the capacitors may need to be decreased to prevent excessive signal loss.

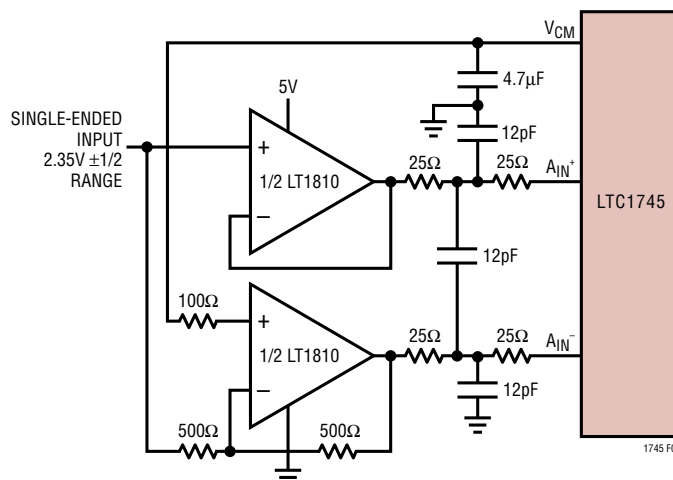


Figure 4. Differential Drive with Op Amps

## APPLICATIONS INFORMATION

## Reference Operation

Figure 5 shows the LTC1745 reference circuitry consisting of a 2.35V bandgap reference, a difference amplifier and switching and control circuit. The internal voltage reference can be configured for two pin selectable input ranges of 2V ( $\pm 1V$  differential) or 3.2V ( $\pm 1.6V$  differential). Tying the SENSE pin to ground selects the 2V range; tying the SENSE pin to  $V_{DD}$  selects the 3.2V range.

The 2.35V bandgap reference serves two functions: its output provides a DC bias point for setting the common mode voltage of any external input circuitry; additionally, the reference is used with a difference amplifier to generate the differential reference levels needed by the internal ADC circuitry.

An external bypass capacitor of 4.7 $\mu F$  or larger is required for the 2.35V reference output,  $V_{CM}$ . This provides a high frequency low impedance path to ground for internal and external circuitry. This is also the compensation capacitor for the reference. It will not be stable without this capacitor.

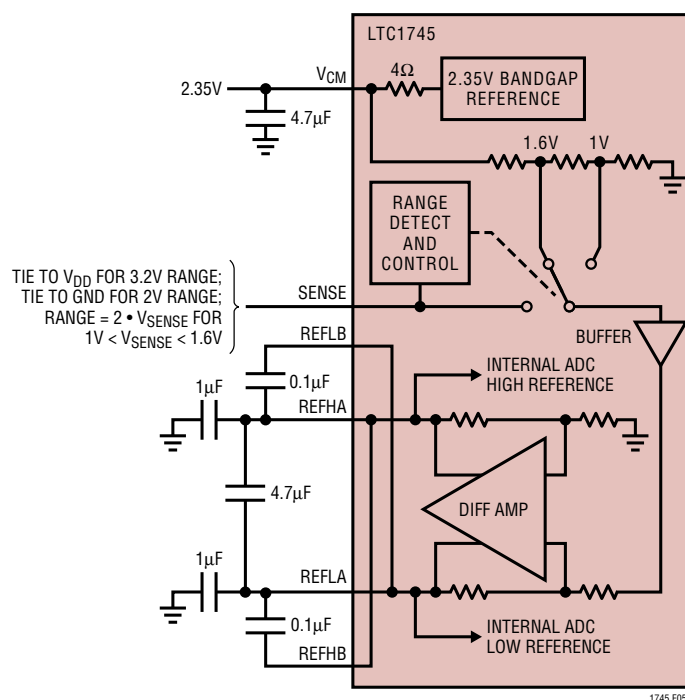


Figure 5. Equivalent Reference Circuit

The difference amplifier generates the high and low reference for the ADC. High speed switching circuits are connected to these outputs and they must be externally bypassed. Each output has two pins: REFHA and REFHB for the high reference and REFLA and REFLB for the low reference. The doubled output pins are needed to reduce package inductance. Bypass capacitors must be connected as shown in Figure 5.

Other voltage ranges in between the pin selectable ranges can be programmed with two external resistors as shown in Figure 6a. An external reference can be used by applying its output directly or through a resistor divider to SENSE. It is not recommended to drive the SENSE pin with a logic device since the logic threshold is close to ground and  $V_{DD}$ . The SENSE pin should be tied high or low as close to the converter as possible. If the SENSE pin is driven externally, it should be bypassed to ground as close to the device as possible with a 1 $\mu F$  ceramic capacitor.




Figure 6a. 2.2V Range ADC

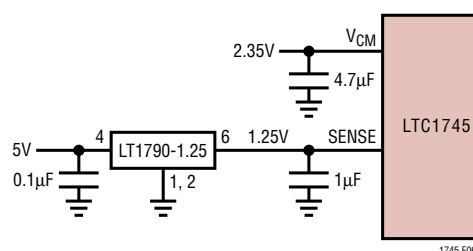


Figure 6b. 2.5V Range ADC with an External Reference

## APPLICATIONS INFORMATION

### Input Range

The input range can be set based on the application. For oversampled signal processing in which the input frequency is low ( $<10\text{MHz}$ ), the largest input range will provide the best signal-to-noise performance while maintaining excellent SFDR. For high input frequencies ( $>10\text{MHz}$ ), the 2V range will have the best SFDR performance but the SNR will degrade by 1.5dB. See the Typical Performance Characteristics section.

### Driving the Encode Inputs

The noise performance of the LTC1745 can depend on the encode signal quality as much as on the analog input. The  $\text{ENC}/\overline{\text{ENC}}$  inputs are intended to be driven differentially, primarily for noise immunity from common mode noise sources. Each input is biased through a 6k resistor to a 2V bias. The bias resistors set the DC operating point for transformer coupled drive circuits and can set the logic threshold for single-ended drive circuits.

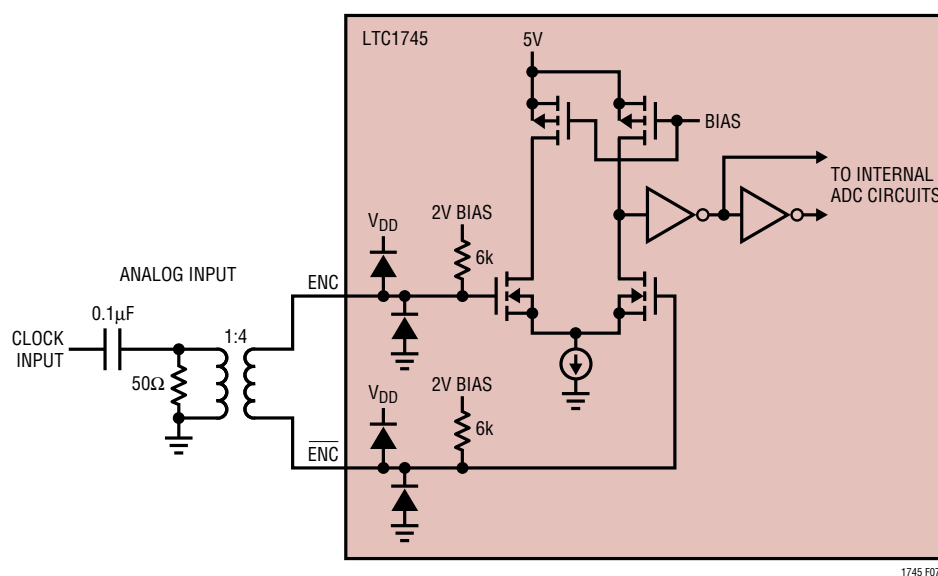


Figure 7. Transformer Driven  $\text{ENC}/\overline{\text{ENC}}$  with Equivalent Encode Input Circuit

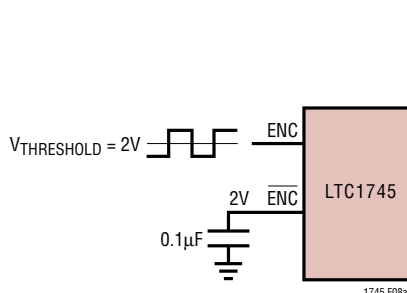


Figure 8a. Single-Ended  $\overline{\text{ENC}}$  Drive, Not Recommended for Low Jitter

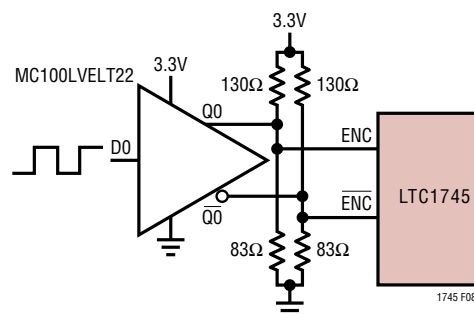


Figure 8b.  $\text{ENC}$  Drive Using a CMOS-to-PECL Translator



## APPLICATIONS INFORMATION

Any noise present on the encode signal will result in additional aperture jitter that will be RMS summed with the inherent ADC aperture jitter.

In applications where jitter is critical (high input frequencies) take the following into consideration:

1. Differential drive should be used.
2. Use as large an amplitude as possible; if transformer coupled use a higher turns ratio to increase the amplitude.
3. If the ADC is clocked with a sinusoidal signal, filter the encode signal to reduce wideband noise.
4. Balance the capacitance and series resistance at both encode inputs so that any coupled noise will appear at both inputs as common mode noise.

The encode inputs have a common mode range of 1.8V to  $V_{DD}$ . Each input may be driven from ground to  $V_{DD}$  for single-ended drive.

### Maximum and Minimum Encode Rates

The maximum encode rate for the LTC1745 is 25Mps. For the ADC to operate properly the encode signal should have a 50% ( $\pm 5\%$ ) duty cycle. Each half cycle must have at least 19ns for the ADC internal circuitry to have enough settling time for proper operation. Achieving a precise 50% duty

cycle is easy with differential sinusoidal drive using a transformer or using symmetric differential logic such as PECL or LVDS. When using a single-ended encode signal asymmetric rise and fall times can result in duty cycles that are far from 50%.

At sample rates slower than 25Mps the duty cycle can vary from 50% as long as each half cycle is at least 19ns.

The lower limit of the LTC1745 sample rate is determined by the droop of the sample-and-hold circuits. The pipelined architecture of this ADC relies on storing analog signals on small valued capacitors. Junction leakage will discharge the capacitors. The specified minimum operating frequency for the LTC1745 is 1Mps.

## DIGITAL OUTPUTS

### Digital Output Buffers

Figure 9 shows an equivalent circuit for a single output buffer. Each buffer is powered by  $OV_{DD}$  and  $OGND$ , isolated from the ADC power and ground. The additional N-channel transistor in the output driver allows operation down to low voltages. The internal resistor in series with the output makes the output appear as  $50\Omega$  to external circuitry and may eliminate the need for external damping resistors.

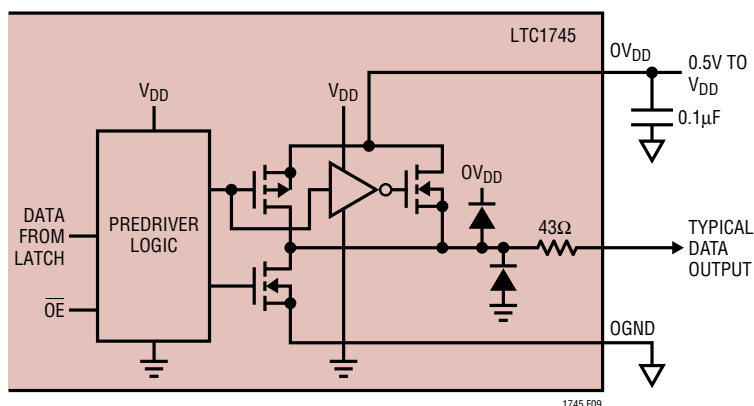


Figure 9. Equivalent Circuit for a Digital Output Buffer



## APPLICATIONS INFORMATION

### Output Loading

As with all high speed/high resolution converters the digital output loading can affect the performance. The digital outputs of the LTC1745 should drive a minimal capacitive load to avoid possible interaction between the digital outputs and sensitive input circuitry. The output should be buffered with a device such as an ALVCH16373 CMOS latch. For full speed operation the capacitive load should be kept under 10pF. A resistor in series with the output may be used but is not required since the ADC has a series resistor of 43 $\Omega$  on chip.

Lower  $OV_{DD}$  voltages will also help reduce interference from the digital outputs.

### Format

The LTC1745 parallel digital output can be selected for offset binary or 2's complement format. The format is selected with the  $\overline{MSBINV}$  pin; high selects offset binary.

### Overflow Bit

An overflow output bit indicates when the converter is overranged or underranged. When OF outputs a logic high the converter is either overranged or underranged.

### Output Clock

The ADC has a delayed version of the  $\overline{ENC}$  input available as a digital output, CLKOUT. The CLKOUT pin can be used to synchronize the converter data to the digital system. This is necessary when using a sinusoidal encode. Data will be updated just after CLKOUT falls and can be latched on the rising edge of CLKOUT.

### Output Driver Power

Separate output power and ground pins allow the output drivers to be isolated from the analog circuitry. The power supply for the digital output buffers,  $OV_{DD}$ , should be tied to the same power supply as for the logic being driven. For example if the converter is driving a DSP powered by a 3V supply then  $OV_{DD}$  should be tied to that same 3V supply.  $OV_{DD}$  can be powered with any voltage up to 5V. The logic outputs will swing between OGND and  $OV_{DD}$ .

### Output Enable

The outputs may be disabled with the output enable pin,  $\overline{OE}$ .  $\overline{OE}$  high disables all data outputs including OF and CLKOUT. The data access and bus relinquish times are too slow to allow the outputs to be enabled and disabled during full speed operation. The output Hi-Z state is intended for use during long periods of inactivity.

## GROUNDING AND BYPASSING

The LTC1745 requires a printed circuit board with a clean unbroken ground plane. A multilayer board with an internal ground plane is recommended. The pinout of the LTC1745 has been optimized for a flowthrough layout so that the interaction between inputs and digital outputs is minimized. Layout for the printed circuit board should ensure that digital and analog signal lines are separated as much as possible. In particular, care should be taken not to run any digital track alongside an analog signal track or underneath the ADC.

## APPLICATIONS INFORMATION

High quality ceramic bypass capacitors should be used at the  $V_{DD}$ ,  $V_{CM}$ , REFHA, REFHB, REFLA and REFLB pins as shown in the block diagram on the front page of this data sheet. Bypass capacitors must be located as close to the pins as possible. Of particular importance are the capacitors between REFHA and REFLB and between REFHB and REFLA. These capacitors should be as close to the device as possible (1.5mm or less). Size 0402 ceramic capacitors are recommended. The large 4.7 $\mu$ F capacitor between REFHA and REFLA can be somewhat further away. The traces connecting the pins and bypass capacitors must be kept short and should be made as wide as possible.

The LTC1745 differential inputs should run parallel and close to each other. The input traces should be as short as possible to minimize capacitance and to minimize noise pickup.

An analog ground plane separate from the digital processing system ground should be used. All ADC ground pins labeled GND should connect to this plane. All ADC  $V_{DD}$  bypass capacitors, reference bypass capacitors and input filter capacitors should connect to this analog plane. The LTC1745 has three output driver ground pins, labeled




OGND (Pins 27, 38 and 47). These grounds should connect to the digital processing system ground. The output driver supply,  $OV_{DD}$  should be connected to the digital processing system supply.  $OV_{DD}$  bypass capacitors should bypass to the digital system ground. The digital processing system ground should be connected to the analog plane at ADC OGND (Pin 38).

### HEAT TRANSFER

Most of the heat generated by the LTC1745 is transferred from the die through the package leads onto the printed circuit board. In particular, ground pins 12, 13, 36 and 37 are fused to the die attach pad. These pins have the lowest thermal resistance between the die and the outside environment. It is critical that all ground pins are connected to a ground plane of sufficient area. The layout of the evaluation circuit shown on the following pages has a low thermal resistance path to the internal ground plane by using multiple vias near the ground pins. A ground plane of this size results in a thermal resistance from the die to ambient of 35°C/W. Smaller area ground planes or poorly connected ground pins will result in higher thermal resistance.

# PACKAGE DESCRIPTION

## FW Package 48-Lead Plastic TSSOP (6.1mm) (Reference LTC DWG # 05-08-1651)

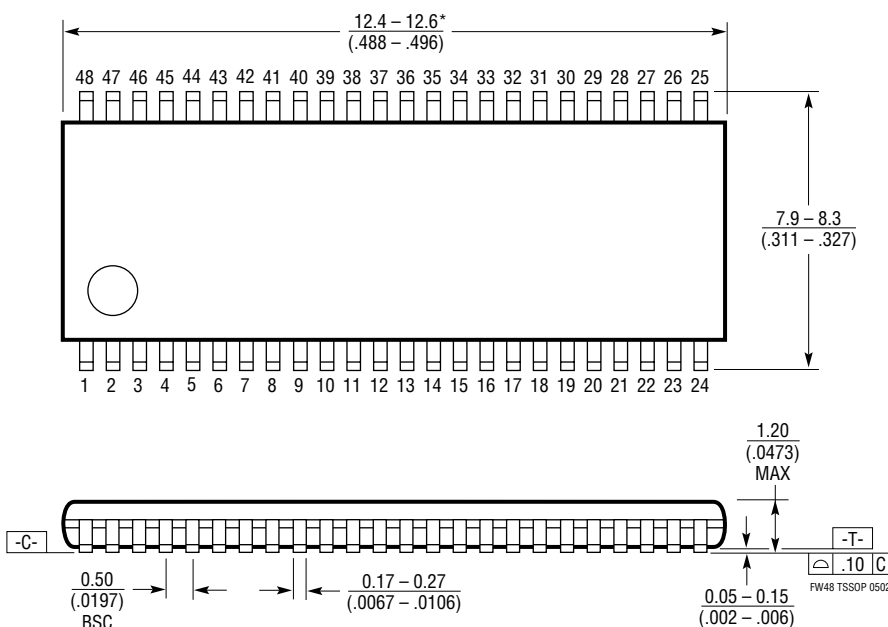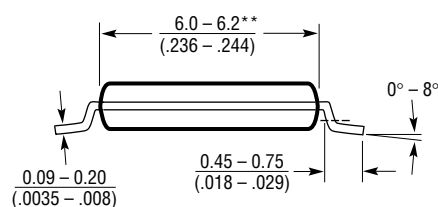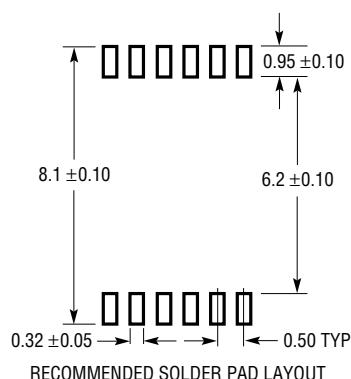

### NOTE:

1. CONTROLLING DIMENSION: MILLIMETERS

2. DIMENSIONS ARE IN  $\frac{\text{MILLIMETERS}}{\text{(INCHES)}}$

3. DRAWING NOT TO SCALE

\*DIMENSIONS DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .152mm (.006") PER SIDE

\*\*DIMENSIONS DO NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED .254mm (.010") PER SIDE

## RELATED PARTS

| PART NUMBER     | DESCRIPTION                           | COMMENTS  |
|-----------------|---------------------------------------|---|
| LT1019          | Precision Bandgap Reference           | 0.05% Max Initial Accuracy, 5ppm/°C Max Drift     |
| LTC1196         | 8-Bit, 1Msps Serial ADC               | 3V to 5V, SO-8                                    |
| LTC1405         | 12-Bit, 5Msps, Sampling ADC           | 5V or ±5V Pin Compatible with the LTC1420         |
| LTC1406         | 8-Bit, 20Msps ADC                     | Undersampling Capability Up to 70MHz Input        |
| LTC1410         | 12-Bit, 1.25Msps ADC                  | ±5V, 71dB SINAD                                   |
| LTC1411         | 14-Bit, 2.5Msps ADC                   | 5V, No Pipeline Delay, 80dB SINAD                 |
| LTC1412         | 12-Bit, 3Msps, Sampling ADC           | ±5V, No Pipeline Delay, 72dB SINAD                |
| LTC1414         | 14-Bit, 2.2Msps ADC                   | ±5V, 81dB SINAD and 95dB SFDR                     |
| LTC1415         | Single 5V, 12-Bit, 1.25Msps           | 55mW Power Dissipation, 72dB SINAD                |
| LTC1419         | 14-Bit, 800ksps ADC                   | ±5V, 95dB SFDR                                    |
| LTC1420         | 12-Bit, 10Msps ADC                    | 71dB SINAD and 83dB SFDR at Nyquist               |
| LT1460          | Micropower Precision Series Reference | 0.075% Accuracy, 10ppm/°C Drift                   |
| LTC1604/LTC1608 | 16-Bit, 333ksps/500ksps ADCs          | 16-Bit, No Missing Codes, 90dB SINAD, –100dB THD  |
| LTC1668         | 16-Bit, 50Msps DAC                    | 87dB SFDR at 1MHz $f_{OUT}$ , Low Power, Low Cost |
| LTC1740         | 14-Bit, 6Msps ADC                     | Low Power, 79dB SINAD, 91dB SFDR                  |
| LTC1741         | 12-Bit, 65Msps ADC                    | Pin Compatible with the LTC1745                   |
| LTC1742         | 14-Bit, 65Msps ADC                    | Pin Compatible with the LTC1745                   |
| LTC1743         | 12-Bit, 50Msps ADC                    | Pin Compatible with the LTC1745                   |
| LTC1744         | 14-Bit, 50Msps ADC                    | Pin Compatible with the LTC1745                   |
| LTC1746         | 14-Bit, 25Msps ADC                    | Pin Compatible with the LTC1745                   |
| LTC1747         | 12-Bit, 80Msps ADC                    | Pin Compatible with the LTC1745                   |
| LTC1748         | 14-Bit, 80Msps ADC                    | Pin Compatible with the LTC1745                   |