

**FEATURES**

- 3.3V power supply
- PECL/TTL-to-TTL version of popular ECLinPS E111AE/LE
- Guaranteed low skew specification
- Three-state enable
- Differential internal design
- VBB output for single-ended operation
- Extra TTL and ECL power/ground pins
- Choice of ECL compatibility: 10K or 100K
- Matched high and low output impedance
- Available in 28-pin PLCC package



Precision Edge®


**DESCRIPTION**

The SY10/100H646L are single supply, low skew translating 1:8 clock drivers. Devices in the Micrel H600 translator series utilize the 28-lead PLCC for optimal power pinning, signal flow-through and electrical performance. The single supply H646L is similar to the HA643 which is a dual supply 1:8 version of the same function.

These devices feature a 24mA TTL output stage, with AC performance specified into a 20pF load capacitance.

The 10H version is compatible with 10K ECL logic levels. The 100H version is compatible with 100K levels.


**BLOCK DIAGRAM**

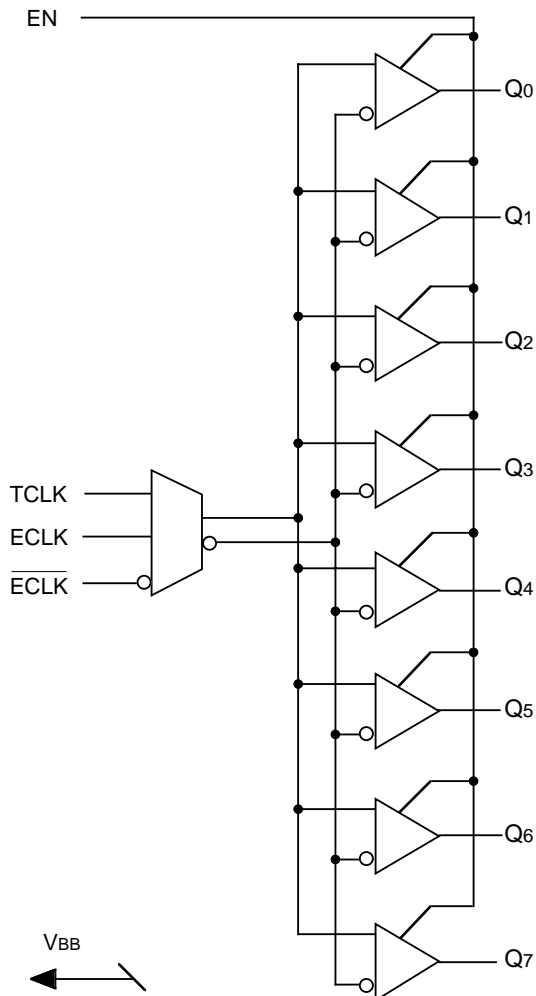

**PIN NAMES**

| Pin                            | Function                         |
|--------------------------------|----------------------------------|
| OGND                           | TTL Output Ground (0V)           |
| OVT                            | TTL Output Vcc (+3.0V)           |
| IGND                           | Internal TTL GND (0V)            |
| IVT                            | Internal TTL Vcc (+3.0V)         |
| VEE                            | ECL VEE (0V)                     |
| VcCE                           | ECL Ground (+3.0V)               |
| ECLK, $\overline{\text{ECLK}}$ | Differential Signal Input (PECL) |
| VBB                            | VBB Reference Output             |
| Q0-Q7                          | Signal Outputs (TTL)             |
| EN                             | Three-State Enable Input (TTL)   |
| TCLK                           | Signal Input (TTL)               |

**PACKAGE/ORDERING INFORMATION**

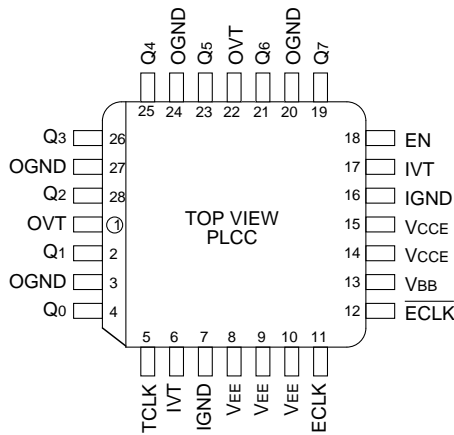

**28-Pin PLCC (J28-1)**

**Ordering Information<sup>(1)</sup>**

| Part Number                      | Package Type | Operating Range | Package Marking                              | Lead Finish |
|----------------------------------|--------------|-----------------|--|-------------|
| SY10H646LJC                      | J28-1        | Commercial      | SY10H646LJC                                  | Sn-Pb       |
| SY10H646LJCTR <sup>(2)</sup>     | J28-1        | Commercial      | SY10H646LJC                                  | Sn-Pb       |
| SY100H646LJC                     | J28-1        | Commercial      | SY100H646LJC                                 | Sn-Pb       |
| SY100H646LJCTR <sup>(2)</sup>    | J28-1        | Commercial      | SY100H646LJC                                 | Sn-Pb       |
| SY10H646LJZ <sup>(3)</sup>       | J28-1        | Commercial      | SY10H646LJZ with Pb-Free bar-line indicator  | Matte-Sn    |
| SY10H646LJZTR <sup>(2, 3)</sup>  | J28-1        | Commercial      | SY10H646LJZ with Pb-Free bar-line indicator  | Matte-Sn    |
| SY100H646LJZ <sup>(3)</sup>      | J28-1        | Commercial      | SY100H646LJZ with Pb-Free bar-line indicator | Matte-Sn    |
| SY100H646LJZTR <sup>(2, 3)</sup> | J28-1        | Commercial      | SY100H646LJZ with Pb-Free bar-line indicator | Matte-Sn    |

**Notes:**

1. Contact factory for die availability. Dice are guaranteed at T<sub>A</sub> = 25°C, DC Electricals only.
2. Tape and Reel.
3. Pb-Free package is recommended for new designs.

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol               | Rating                                    | Value                        | Unit |
|----------------------|---|------------------------------|------|
| VE (ECL)<br>VT (TTL) | Power Supply Voltage                      | -0.5 to +7.0<br>-0.5 to +7.0 | V    |
| VI (ECL)<br>VI (TTL) | Input Voltage                             | 0.0 to VEE<br>-0.5 to VCC    | V    |
| VOUT (TTL)           | Disabled 3-State Output                   | 0.0 to VCCT                  | V    |
| IOUT (ECL)           | Output Current<br>- Continuous<br>- Surge | 50<br>100                    | mA   |
| TLEAD                | Lead Temperature Range (soldering, 20sec) | +260                         | °C   |
| Tstore               | Storage Temperature                       | -65 to +150                  | °C   |
| TA                   | Operating Temperature                     | 0 to +85                     | °C   |

**Note:**

- Do not exceed.

### TRUTH TABLE

| TCLK | ECLK | $\overline{\text{ECLK}}$ | EN | Q |
|------|------|--------------------------|----|---|
| GND  | L    | H                        | H  | L |
| GND  | H    | L                        | H  | H |
| H    | GND  | GND                      | H  | H |
| L    | GND  | GND                      | H  | L |
| X    | X    | X                        | L  | Z |

**Note:**

- X = Don't Care
- L = Low Voltage Level
- H = High Voltage Level
- Z = Three-State

### DC ELECTRICAL CHARACTERISTICS

OVT = IVT = VCCE = 3.0V to 3.6V

| Symbol | Parameter            | TA = 0°C |      | TA = +25°C |      | TA = +85°C |      | Unit | Condition                         |
|--------|----------------------|----------|------|------------|------|------------|------|------|-----------------------------------|
|        |                      | Min.     | Max. | Min.       | Max. | Min.       | Max. |      |                                   |
| ICCL   | Power Supply Current | —        | 120  | —          | 120  | —          | 120  | mA   | Total all OVT, IVT, and VCCE pins |
| ICCH   |                      | —        | 120  | —          | 120  | —          | 120  |      |                                   |

### TTL DC ELECTRICAL CHARACTERISTICS

OVT = IVT = VCCE = 3.0V to 3.6V

| Symbol | Parameter                    | TA = 0°C |           | TA = +25°C |           | TA = +85°C |           | Unit | Condition                |
|--------|------------------------------|----------|-----------|------------|-----------|------------|-----------|------|--------------------------|
|        |                              | Min.     | Max.      | Min.       | Max.      | Min.       | Max.      |      |                          |
| VIH    | Input HIGH Voltage           | 2.0      | —         | 2.0        | —         | 2.0        | —         | V    |                          |
| VIL    | Input LOW Voltage            | —        | 0.8       | —          | 0.8       | —          | 0.8       | V    |                          |
| IiH    | Input HIGH Current           | —        | 20<br>100 | —          | 20<br>100 | —          | 20<br>100 | μA   | VIN = 2.7 V<br>VIN = VCC |
| IiL    | Input LOW Current            | —        | -0.4      | —          | -0.4      | —          | -0.4      | mA   | VIN = 0.5 V              |
| VOH    | Output HIGH Voltage          | 2.0      | —         | 2.0        | —         | 2.0        | —         | V    | IOH = -3.0 mA            |
| VOL    | Output LOW Voltage           | —        | 0.5       | —          | 0.5       | —          | 0.5       | V    | IoL = 24 mA              |
| VIK    | Input Clamp Voltage          | —        | -1.2      | —          | -1.2      | —          | -1.2      | V    | IIN = -18mA              |
| Ios    | Output Short Circuit Current | -100     | —         | -100       | —         | -100       | —         | mA   | VOH = 0V                 |

**10H ECL DC ELECTRICAL CHARACTERISTICS**OVT = IVT = V<sub>CCE</sub> = 3.0V to 3.6V

| Symbol          | Parameter                               | TA = 0°C |       | TA = +25°C |       | TA = +85°C |       | Unit | Condition             |
|-----------------|---|----------|-------|------------|-------|------------|-------|------|-----------------------|
|                 |   | Min.     | Max.  | Min.       | Max.  | Min.       | Max.  |      |                       |
| I <sub>IH</sub> | Input HIGH Current                      | —        | 225   | —          | 175   | —          | 175   | μA   | —                     |
| I <sub>IL</sub> | Input LOW Current                       | 0.5      | —     | 0.5        | —     | 0.5        | —     | μA   | —                     |
| V <sub>IH</sub> | Input HIGH Voltage <sup>(1)</sup>       | 2.130    | 2.460 | 2.170      | 2.490 | 2.240      | 2.580 | V    | V <sub>E</sub> = 3.3V |
| V <sub>IL</sub> | Input LOW Voltage <sup>(1)</sup>        | 1.350    | 1.820 | 1.350      | 1.820 | 1.350      | 1.855 | V    | V <sub>E</sub> = 3.3V |
| V <sub>BB</sub> | Output Reference Voltage <sup>(1)</sup> | 1.920    | 2.030 | 1.950      | 2.050 | 1.990      | 2.110 | V    | V <sub>E</sub> = 3.3V |

**Note:**1. V<sub>IH</sub>, V<sub>IL</sub> and V<sub>BB</sub> are referenced to V<sub>CC</sub> and will vary 1:1 with the power supply. The levels shown are for V<sub>CC</sub> = +3.3V.**100H ECL DC ELECTRICAL CHARACTERISTICS**OVT = IVT = V<sub>CCE</sub> = 3.0V to 3.6V

| Symbol          | Parameter                               | TA = 0°C |       | TA = +25°C |       | TA = +85°C |       | Unit | Condition             |
|-----------------|---|----------|-------|------------|-------|------------|-------|------|-----------------------|
|                 |   | Min.     | Max.  | Min.       | Max.  | Min.       | Max.  |      |                       |
| I <sub>IH</sub> | Input HIGH Current                      | —        | 225   | —          | 175   | —          | 175   | μA   | —                     |
| I <sub>IL</sub> | Input LOW Current                       | 0.5      | —     | 0.5        | —     | 0.5        | —     | μA   | —                     |
| V <sub>IH</sub> | Input HIGH Voltage <sup>(1)</sup>       | 2.135    | 2.420 | 2.135      | 2.420 | 2.135      | 2.420 | V    | V <sub>E</sub> = 3.3V |
| V <sub>IL</sub> | Input LOW Voltage <sup>(1)</sup>        | 1.490    | 1.825 | 1.490      | 1.825 | 1.490      | 1.825 | V    | V <sub>E</sub> = 3.3V |
| V <sub>BB</sub> | Output Reference Voltage <sup>(1)</sup> | 1.920    | 2.040 | 1.920      | 2.040 | 1.920      | 2.040 | V    | V <sub>E</sub> = 3.3V |

**Note:**1. V<sub>IH</sub>, V<sub>IL</sub> and V<sub>BB</sub> are referenced to V<sub>CC</sub> and will vary 1:1 with the power supply. The levels shown are for V<sub>CC</sub> = +3.3V.

**AC ELECTRICAL CHARACTERISTICS**


IVT = OVT = VCCE = 3.0V to 3.6V

| Symbol     | Parameter                                | TA = 0°C |      |      | TA = +25°C |      |      | TA = +85°C |      |      | Unit | Condition |
|------------|--|----------|------|------|------------|------|------|------------|------|------|------|-----------|
|            |  | Min.     | Typ. | Max. | Min.       | Typ. | Max. | Min.       | Typ. | Max. |      |           |
| tPLH       | Propagation Delay ECLK to Q              | 2.3      | —    | 3.3  | 2.25       | —    | 3.25 | 2.2        | —    | 3.2  | ns   | CL = 20pF |
| tPHL       | TCLK to Q                                | 2.3      | —    | 3.3  | 2.25       | —    | 3.25 | 2.2        | —    | 3.2  |      |           |
| tskpp      | Part-to-Part Skew <sup>(1,4)</sup>       | —        | —    | 0.5  | —          | —    | 0.5  | —          | —    | 0.5  | ns   | CL = 20pF |
| tskew++    | Within-Device Skew <sup>(2,4)</sup>      | —        | —    | 0.3  | —          | —    | 0.3  | —          | —    | 0.3  | ns   | CL = 20pF |
| tskew--    | Within-Device Skew <sup>(3,4)</sup>      | —        | —    | 0.3  | —          | —    | 0.3  | —          | —    | 0.3  | ns   | CL = 20pF |
| tr         | Rise 0.8V to 2.0V                        | 0.3      | —    | 1.5  | 0.3        | —    | 1.5  | 0.3        | —    | 1.5  | ns   | CL = 20pF |
| tf         | Fall Time 0.8V to 2.0V                   | 0.3      | —    | 1.5  | 0.3        | —    | 1.5  | 0.3        | —    | 1.5  | ns   | CL = 20pF |
| tPW        | Output Pulse Width                       |          |      |      |            |      |      |            |      |      | ns   | CL = 20pF |
|            | 66MHz @ 2.0V                             | 5.5      | —    | —    | 5.5        | —    | —    | 5.5        | —    | —    |      |           |
|            | 66MHz @ 0.8V                             | 5.5      | —    | —    | 5.5        | —    | —    | 5.5        | —    | —    |      |           |
|            | 60MHz @ 2.0V                             | 6.0      | —    | —    | 6.0        | —    | —    | 6.0        | —    | —    |      |           |
|            | 60MHz @ 0.8V                             | 6.0      | —    | —    | 6.0        | —    | —    | 6.0        | —    | —    |      |           |
| tStability | Clock Stability <sup>(7)</sup>           | —        | —    | ±75  | —          | —    | ±75  | —          | —    | ±75  | ps   | CL = 20pF |
| fMAX       | Maximum Input Frequency <sup>(5,6)</sup> | 160      | —    | —    | 160        | —    | —    | 160        | —    | —    | MHz  | CL = 20pF |


**Notes:**

1. Device-to-Device Skew considering HIGH-to-HIGH or LOW-to-LOW transitions at common Vcc level.
2. Within-Device Skew considering HIGH-to-HIGH transitions at common Vcc level.
3. Within-Device Skew considering LOW-to-LOW transitions at common Vcc level.
4. All skew parameters are guaranteed but not tested.
5. Frequency at which output levels will meet a 0.8V to 2.0V minimum swing.
6. The fMAX value is specified as the minimum guaranteed maximum frequency. Actual operational maximum frequency may be greater.
7. Clock stability is the period variation between two successive rising edges.

**ADDITIONAL INFORMATION**

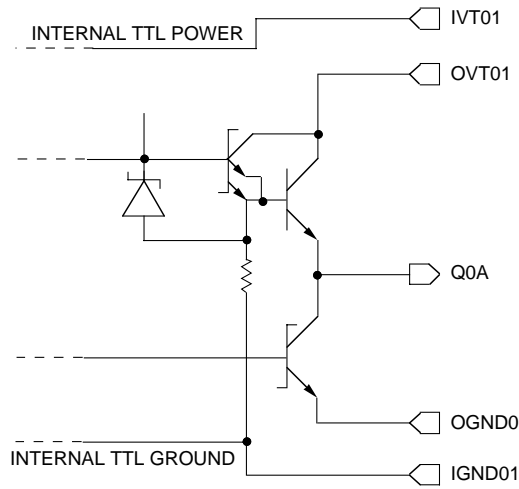


**Figure 1. Output Structure**

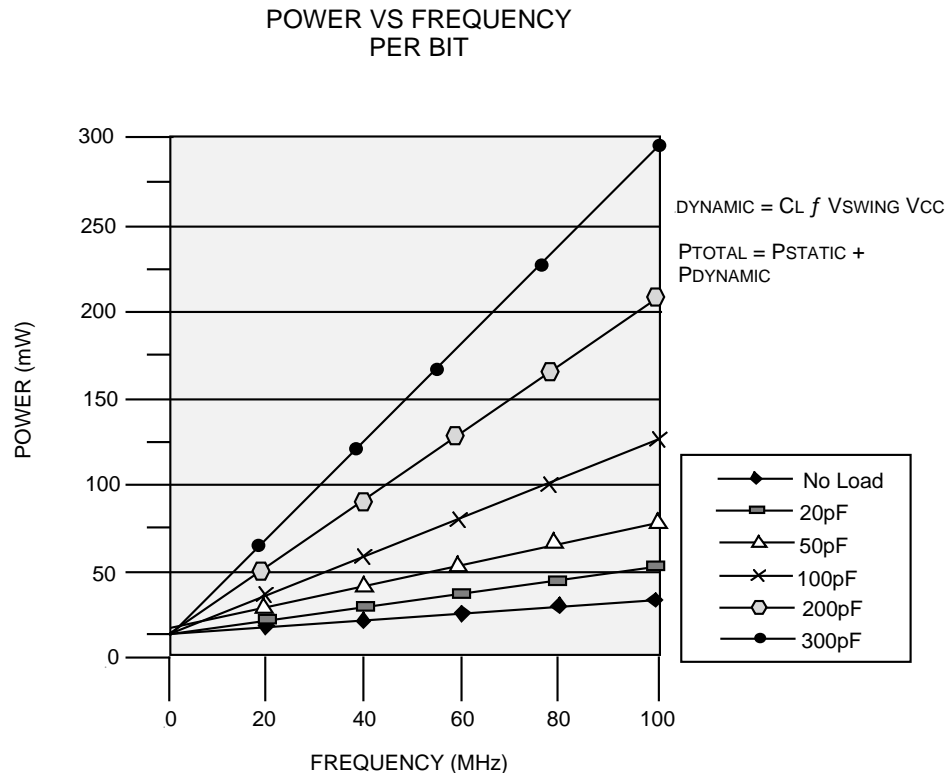

**Figure 2. Power Versus Frequency (Typical)**

**28-PIN PLCC (J28-1)**

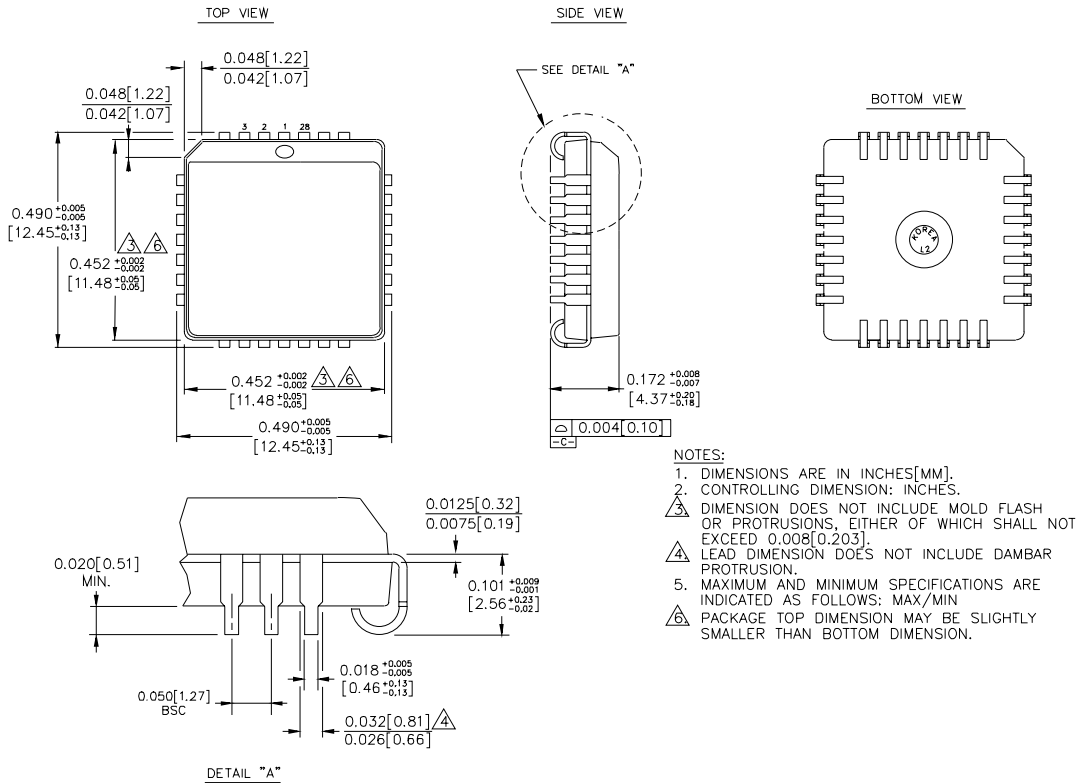

Rev. 03

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify

Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.