


FEATURES

- 3.3V and 5V power supply options
- 1.12GHz maximum VCO frequency
- 30MHz to 560MHz reference input operating frequency
- External 2.0GHz VCO capability
- Low jitter differential design
- Frequency doubler mode
- PECL Differential output
- External loop filter optimizes performance/cost
- Available in 20-pin SOIC package

APPLICATIONS

- Workstations
- Advanced communications
- High-performance computing

PIN CONFIGURATION

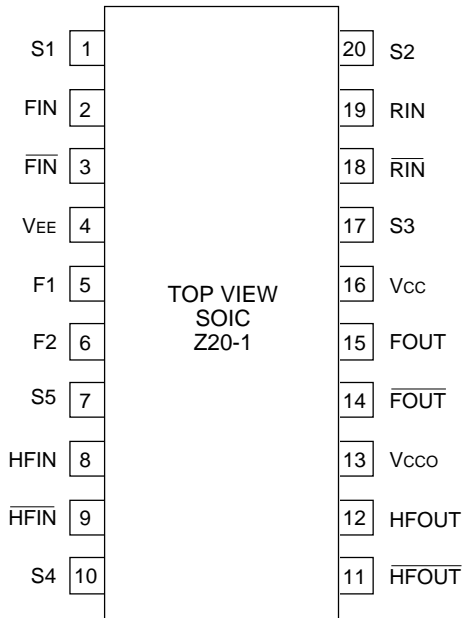


DESCRIPTION

The SY89421V is a digital Phase Locked Loop based on Micrel-Synergy's differential PLL technology. It is capable of operating in the 30MHz to 560MHz reference input frequency range, and up to 2000MHz with the HFIN input and an external VCO. Use of a phase-frequency detector results in excellent PLL locking and tracking characteristics. Error correction voltages are generated by the detector if either phase or frequency deviations occur. The VCO has a frequency range covering more than a 2:1 ratio from 480MHz to 1120MHz.


Feedback for the loop is realized by connecting FOUT, $\overline{\text{FOUT}}$ to FIN, $\overline{\text{FIN}}$ by means of external circuitry. This allows the flexibility of inserting additional circuitry off-chip in the feedback paths, such as an additional divider and/or buffer. Pulldown resistors are required for the FOUT and $\overline{\text{FOUT}}$ pins. High frequency inputs HFIN, $\overline{\text{HFIN}}$ and corresponding outputs HFOUT, $\overline{\text{HFOUT}}$ are featured for use with external components such as an active loop filter and a high frequency VCO.

Select pins S1 and S2 are used to program the N divider for optimum VCO operation, in other words with the VCO in the center of its range. Select pin S3 allows bypassing the N divider enabling the PLL to output the VCO directly. Select pin S4 is used to select off-chip or on-chip VCO. Select pin S5 enables the divide-by-two prescaler, which is useful in frequency doubling applications. All Select pins are TTL compatible.

BLOCK DIAGRAM

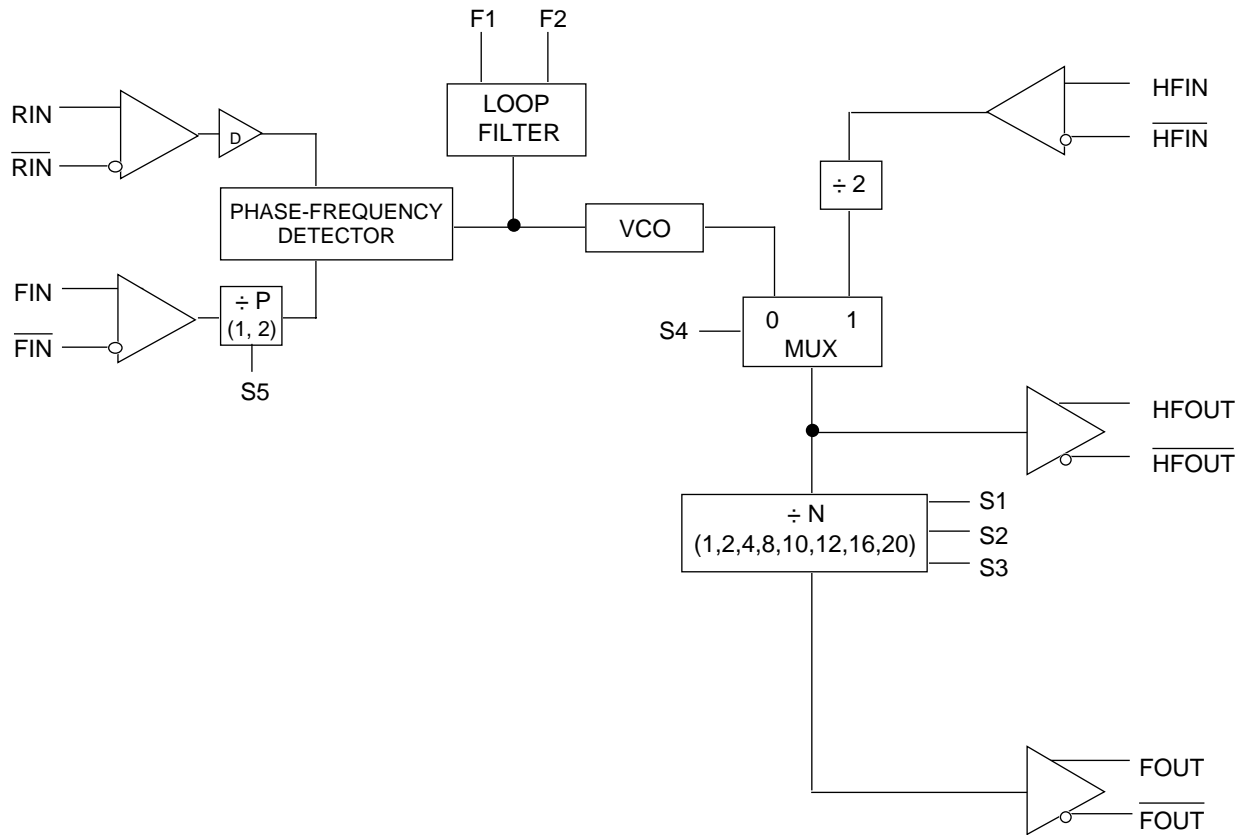

LOOP FILTER COMPONENT SELECTION

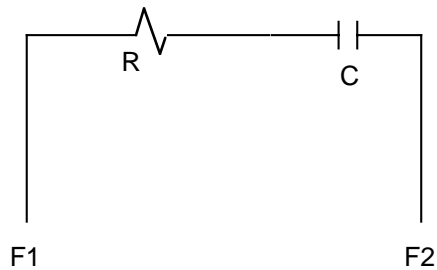

C = 1.0 μ F \pm 10% (X7R dielectric)

R = 560 Ω \pm 10%

PIN NAMES

| Pin | Function | I/O |
|---------------------------|--------------------------------|-----|
| F1 | Filter Pin 1 | I/O |
| F2 | Filter Pin 2 | I/O |
| RIN | Reference Input | I |
| $\overline{\text{RIN}}$ | Inverted Reference Input | I |
| FIN | Feedback Input | I |
| $\overline{\text{FIN}}$ | Inverted Feedback Input | I |
| HFIN | High Frequency Input | I |
| $\overline{\text{HFIN}}$ | Inverted High Frequency Input | I |
| HFOUT | High Frequency Output | O |
| $\overline{\text{HFOUT}}$ | Inverted High Frequency Output | O |
| FOUT | Frequency Output | O |
| $\overline{\text{FOUT}}$ | Inverted Frequency Output | O |
| VCC | VCC | — |
| VCCO | Output Vcc | — |
| VEE | VEE (0V) | — |
| S1 | Select Input 1 (TTL) | I |
| S2 | Select Input 2 (TTL) | I |
| S3 | Select Input 3 (TTL) | I |
| S4 | Select Input 4 (TTL) | I |
| S5 | Select Input 5 (TTL) | I |

PIN DESCRIPTION**RIN, $\overline{\text{RIN}}$**

Reference frequency inputs. These are differential signal pairs and may be driven differentially or single-ended.

FIN, $\overline{\text{FIN}}$

Feedback frequency inputs. These are a differential signal pair and may be driven differentially or single-ended.

HFIN, $\overline{\text{HFIN}}$

High frequency feedback inputs. These are a differential signal pair. Differential drive is recommended.

F1, F2

These pins are connection points for the loop filter, which is to be provided off-chip. F1 is the high impedance side, F2 is the reference side. The loop filter should be a first order, low pass with a DC block. The difference voltage on these pins will be a dc level, which is controlled by the loop feedback and determined by the required VCO frequency.

FOUT, $\overline{\text{FOUT}}$

Frequency outputs for the loops. These are differential, positive referenced, emitter-follower signals and must be terminated off chip. Termination in 50 ohms is recommended.

HFOUT, $\overline{\text{HFOUT}}$

High frequency output. These are a differential signal pair. Termination in 50 ohms is recommended.

S1, S2, S3, S4, S5

These are the frequency select inputs, and are used to configure the PLL. They are compatible with standard TTL signal levels. See the Frequency Selection Table for details of the logic.

Vcc

This is the positive supply for the chip. It should be decoupled and should present a very low impedance in order to assure low-jitter operation.

VCCO

This is the positive supply for the output buffer. It is constrained to be equal to or less than the value of VCC. It should be decoupled and should present a very low impedance for low-jitter.

VEE

This pin is the negative supply for the chip and is normally connected to ground (0V).

FREQUENCY SELECTION TABLE

| S4 | S3 | S2 | S1 | N | FOUT Freq. Range MHz | HFOUT Freq. Range MHz |
|----|----|----|----|----|-------------------------|--------------------------|
| 0 | 0 | 0 | 0 | 2 | 240 – 560 | 480 – 1120 |
| 0 | 0 | 0 | 1 | 4 | 120 – 280 | 480 – 1120 |
| 0 | 0 | 1 | 0 | 8 | 60 – 140 | 480 – 1120 |
| 0 | 0 | 1 | 1 | 16 | 30 – 70 | 480 – 1120 |
| 0 | 1 | 0 | 0 | 1 | 480 – 1120 | 480 – 1120 |
| 0 | 1 | 0 | 1 | 10 | 48 – 112 | 480 – 1120 |
| 0 | 1 | 1 | 0 | 12 | 40 – 93.3 | 480 – 1120 |
| 0 | 1 | 1 | 1 | 20 | 20 – 56 | 480 – 1120 |
| 1 | 0 | 0 | 0 | 2 | HFIN divide by 4 | HFIN divide by 2 |
| 1 | 0 | 0 | 1 | 4 | HFIN divide by 8 | HFIN divide by 2 |
| 1 | 0 | 1 | 0 | 8 | HFIN divide by 16 | HFIN divide by 2 |
| 1 | 0 | 1 | 1 | 16 | HFIN divide by 32 | HFIN divide by 2 |
| 1 | 1 | 0 | 0 | 1 | HFIN divide by 2 | HFIN divide by 2 |
| 1 | 1 | 0 | 1 | 10 | HFIN divide by 20 | HFIN divide by 2 |
| 1 | 1 | 1 | 0 | 12 | HFIN divide by 24 | HFIN divide by 2 |
| 1 | 1 | 1 | 1 | 20 | HFIN divide by 40 | HFIN divide by 2 |

| S5 | Divide-by-P | Maximum Feedback Frequency (MHz) |
|----|-------------|-------------------------------------|
| 0 | P = 1 | 560 |
| 1 | P = 2 | 1120 |

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

| Symbol | Parameter | Value | Unit |
|--------------------|---|--------------|------|
| V _{CC} | Power Supply Voltage | -0.5 to +7.0 | V |
| V _I | TTL Input Voltage ⁽²⁾ | -0.5 to 6.0 | V |
| I _I | TTL Input Current ⁽²⁾ | -30 to +5.0 | mA |
| I _{OUT} | ECL Output Current — Continuous — Surge | 50 100 | mA |
| T _{store} | Storage Temperature | -65 to +150 | °C |
| T _A | Operating Temperature Range ⁽³⁾ | 0 to +85 | °C |

NOTES:

1. Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to ABSOLUTE MAXIMUM RATING conditions for extended periods may affect device reliability.
2. Either voltage limit or current limit is sufficient to protect input.
3. All DC and AC electrical characteristics are specified over the operating temperature range.

5V DC ELECTRICAL CHARACTERISTICSV_{CC} = V_{CCO} = 5.0V ±5%

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Condition |
|------------------|--|------|------|------|------|------------------------------------|
| V _{CC} | Power Supply Voltage | 4.75 | — | 5.25 | V | V _{CC} = V _{CCO} |
| I _{CC} | Power Supply Current (V _{CC}) | — | — | 100 | mA | |
| I _{CCO} | Power Supply Current (V _{CCO}) | — | — | 28 | mA | PECL outputs are open |

3.3V DC ELECTRICAL CHARACTERISTICSV_{CC} = V_{CCO} = 3.3V ±5%

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Condition |
|------------------|--|-------|------|-------|------|------------------------------------|
| V _{CC} | Power Supply Voltage | 3.135 | — | 3.465 | V | V _{CC} = V _{CCO} |
| I _{CC} | Power Supply Current (V _{CC}) | — | — | 100 | mA | |
| I _{CCO} | Power Supply Current (V _{CCO}) | — | — | 28 | mA | PECL outputs are open |

PECL DC ELECTRICAL CHARACTERISTICSV_{CC} = V_{CCO} = 3.3V or 5.0V ±5%

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Condition |
|-----------------|---------------------|-------------------------|------|-------------------------|------|-----------|
| V _{OH} | Output HIGH Voltage | V _{CC} - 1.025 | — | V _{CC} - 0.780 | V | |
| V _{OL} | Output LOW Voltage | V _{CC} - 1.810 | — | V _{CC} - 1.520 | V | |
| V _{IH} | Input HIGH Voltage | V _{CC} - 1.165 | — | V _{CC} - 0.780 | V | |
| V _{IL} | Input LOW Voltage | V _{CC} - 1.810 | — | V _{CC} - 1.475 | V | |

TTL DC ELECTRICAL CHARACTERISTICSV_{CC} = V_{CCO} = 3.3V or 5.0V ±5%

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Condition |
|-----------------|---------------------|------|------|-----------|------|---|
| V _{IH} | Input HIGH Voltage | 2.0 | — | — | V | |
| V _{IL} | Input LOW Voltage | — | — | 0.8 | V | |
| I _{IH} | Input HIGH Current | — | — | 20 100 | μA | V _{IN} = 2.7V V _{IN} = V _{CC} |
| I _{IL} | Input LOW Current | — | — | -0.3 | mA | V _{IN} = 0.5V |
| V _{IK} | Input Clamp Voltage | — | — | -1.2 | V | I _{IN} = -12mA |


AC ELECTRICAL CHARACTERISTICSV_{CC} = V_{CCO} = 3.3V or 5.0V ±5%

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Condition |
|----------|---------------------------------------|--------|------------|-------------|------------|------------------|
| ΔT | Output Period Jitter | — | 10 | 15 | ps rms | |
| PPW | Output Duty Cycle | 45 | 50 | 55 | % | |
| tr tf | Output Rise/Fall Time (20% to 80%) | — — | 300 300 | 550 550 | ps | — |
| RIN | Reference Frequency Input | — | — | 560 | MHz | |
| FIN | Feedback Frequency Input | — — | — — | 560 1120 | MHz MHz | S5 = 0 S5 = 1 |
| HFIN | High Frequency Input | — | — | 2000 | MHz | |
| HFOUT | High Frequency Output | — | — | 1120 | MHz | |
| FOUT | Frequency Output | — | — | 1120 | MHz | |

PRODUCT ORDERING CODE

| Odering Code | Package Type | Operating Range |
|--------------|--------------|-----------------|
| SY89421VZC | Z20-1 | Commercial |
| SY89421VZCTR | Z20-1 | Commercial |

20 LEAD SOIC .300" WIDE (Z20-1)

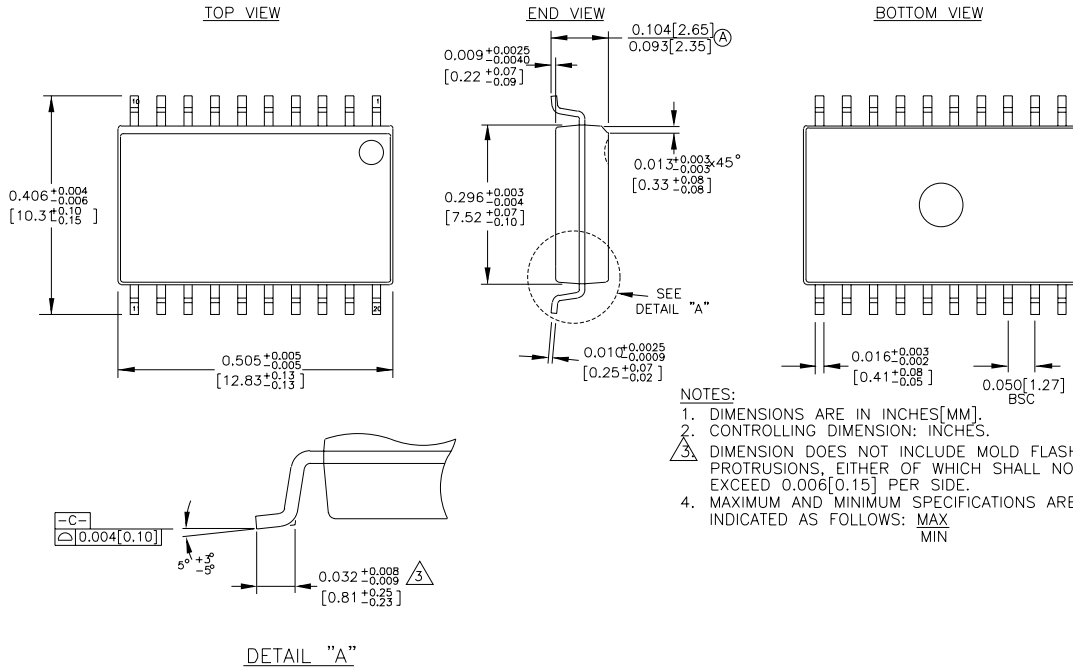

- NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
 2. CONTROLLING DIMENSION: INCHES.
 - Ⓐ DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.006[0.15] PER SIDE.
 4. MAXIMUM AND MINIMUM SPECIFICATIONS ARE INDICATED AS FOLLOWS: MAX
MIN

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated
