

# BUK754R0-55B; BUK764R0-55B

N-channel TrenchMOS standard level FET

Rev. 04 — 4 October 2007

Product data sheet

## 1. Product profile

### 1.1 General description

N-channel enhancement mode power Field-Effect Transistor (FET) in a plastic package using NXP High-Performance Automotive (HPA) TrenchMOS technology.

### 1.2 Features

- Very low on-state resistance
- 175 °C rated
- Q101 compliant
- Standard level compatible

### 1.3 Applications




- Automotive systems
- Motors, lamps and solenoids
- General purpose power switching
- 12 V and 24 V loads

### 1.4 Quick reference data

- $E_{DS(AL)S} \leq 1.2 \text{ J}$
- $I_D \leq 75 \text{ A}$
- $R_{DSon} = 3.4 \text{ m}\Omega$  (typ)
- $P_{tot} \leq 300 \text{ W}$

## 2. Pinning information

Table 1. Pinning

| Pin | Description                           | Simplified outline   | Symbol  |
|-----|---------------------------------------|--|---|
| 1   | gate (G)                              | <br>03ab54<br>SOT78A (TO-220AB) | <br>mbb076 |
| 2   | drain (D)                             |  |   |
| 3   | source (S)                            |  |   |
| mb  | mounting base; connected to drain (D) | <br>SOT404 (D2PAK)            |   |

### 3. Ordering information

**Table 2. Ordering information**

| Type number  | Package |  | Version |
|--------------|---------|--|---------|
|              | Name    | Description  |         |
| BUK754R0-55B | SC-46   | plastic single-ended package; heatsink mounted; 1 mounting hole; 3-lead TO-220AB | SOT78A  |
| BUK764R0-55B | D2PAK   | plastic single-ended surface-mounted package (D2PAK); 3 leads (one lead cropped) | SOT404  |

### 4. Limiting values

**Table 3. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol                      | Parameter                                    | Conditions  | Min    | Max      | Unit             |   |
|-----------------------------|--|---|--------|----------|------------------|---|
| $V_{DS}$                    | drain-source voltage                         |   | -      | 55       | V                |   |
| $V_{DGR}$                   | drain-gate voltage (DC)                      | $R_{GS} = 20 \text{ k}\Omega$   | -      | 55       | V                |   |
| $V_{GS}$                    | gate-source voltage                          |   | -      | $\pm 20$ | V                |   |
| $I_D$                       | drain current                                | $T_{mb} = 25 \text{ }^\circ\text{C}$ ; $V_{GS} = 10 \text{ V}$ ;<br>see <a href="#">Figure 2</a> and <a href="#">3</a>  | [1][3] | -        | 193              | A |
|                             |  |   | [2]    | -        | 75               | A |
|                             |  | $T_{mb} = 100 \text{ }^\circ\text{C}$ ; $V_{GS} = 10 \text{ V}$ ; see <a href="#">Figure 2</a>  | [2]    | -        | 75               | A |
| $I_{DM}$                    | peak drain current                           | $T_{mb} = 25 \text{ }^\circ\text{C}$ ; pulsed; $t_p \leq 10 \text{ }\mu\text{s}$ ; see <a href="#">Figure 3</a>   | -      | 774      | A                |   |
| $P_{tot}$                   | total power dissipation                      | $T_{mb} = 25 \text{ }^\circ\text{C}$ ; see <a href="#">Figure 1</a>   | -      | 300      | W                |   |
| $T_{stg}$                   | storage temperature                          |   | -55    | +175     | $^\circ\text{C}$ |   |
| $T_j$                       | junction temperature                         |   | -55    | +175     | $^\circ\text{C}$ |   |
| <b>Source-drain diode</b>   |  |   |        |          |                  |   |
| $I_{DR}$                    | reverse drain current                        | $T_{mb} = 25 \text{ }^\circ\text{C}$  | [1][2] | -        | 193              | A |
|                             |  |   | [2]    | -        | 75               | A |
| $I_{DRM}$                   | peak reverse drain current                   | $T_{mb} = 25 \text{ }^\circ\text{C}$ ; pulsed; $t_p \leq 10 \text{ }\mu\text{s}$  | -      | 774      | A                |   |
| <b>Avalanche ruggedness</b> |  |   |        |          |                  |   |
| $E_{DS(AL)S}$               | non-repetitive drain-source avalanche energy | unclamped inductive load; $I_D = 75 \text{ A}$ ;<br>$V_{DS} \leq 55 \text{ V}$ ; $R_{GS} = 50 \text{ }\Omega$ ; $V_{GS} = 10 \text{ V}$ ; starting at $T_j = 25 \text{ }^\circ\text{C}$ | -      | 1.2      | J                |   |
| $E_{DS(AL)R}$               | repetitive drain-source avalanche energy     |   | [4]    | -        | -                | J |


[1] Current is limited by chip power dissipation rating.

[2] Continuous current is limited by package.

[3] Refer to document *9397 750 12572* for further information.


[4] Conditions:

- Maximum value not quoted. Repetitive rating defined in [Figure 16](#).
- Single-pulse avalanche rating limited by  $T_{j(max)}$  of  $175 \text{ }^\circ\text{C}$ .
- Repetitive avalanche rating limited by an average junction temperature of  $170 \text{ }^\circ\text{C}$ .
- Refer to application note *AN10273* for further information.

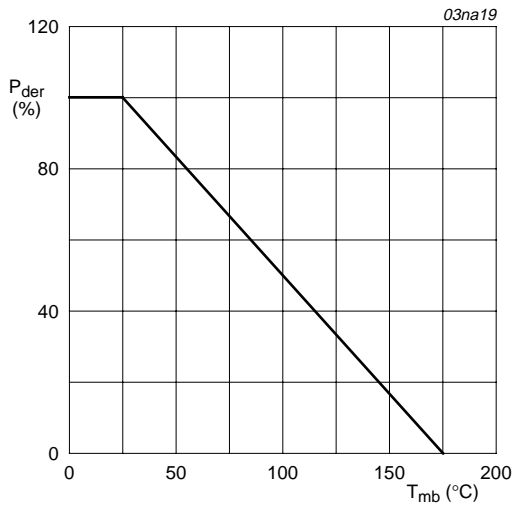

$$P_{der} = \frac{P_{tot}}{P_{tot(25^{\circ}C)}} \times 100\%$$


**Fig 1. Normalized total power dissipation as a function of mounting base temperature**

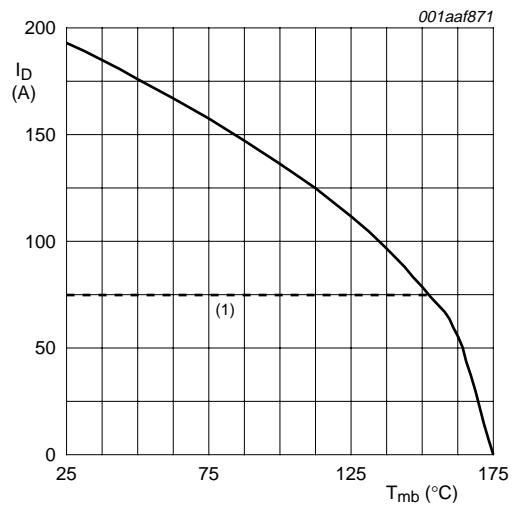

$V_{GS} \geq 10\text{ V}$

(1) Capped at 75 A due to package.

**Fig 2. Continuous drain current as a function of mounting base temperature**

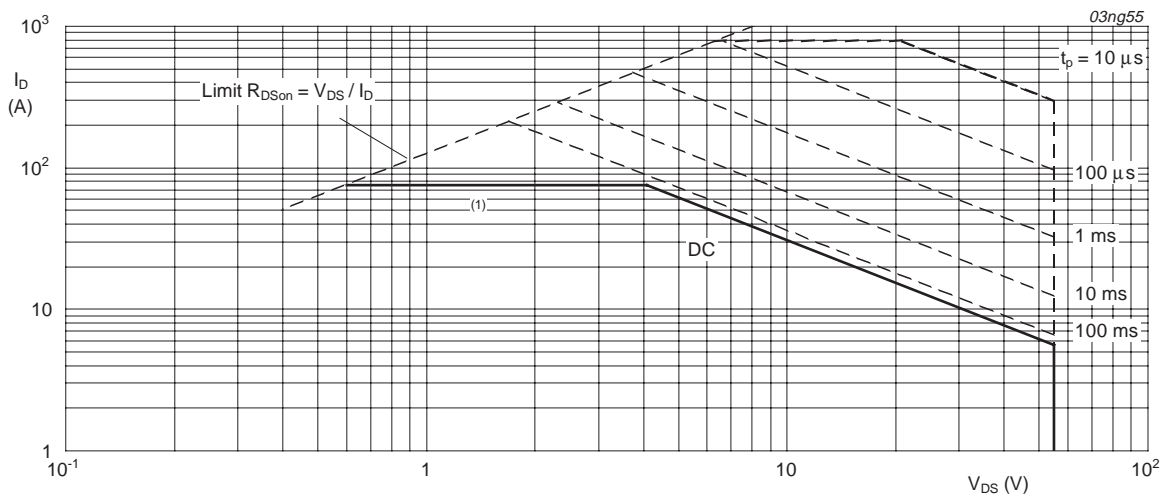

$T_{mb} = 25^{\circ}C$ ;  $I_{DM}$  is single pulse


(1) Capped at 75 A due to package.

**Fig 3. Safe operating area; continuous and peak drain currents as a function of drain-source voltage**

**5. Thermal characteristics**

**Table 4. Thermal characteristics**

| Symbol         | Parameter   | Conditions  | Min | Typ | Max | Unit |
|----------------|---|---|-----|-----|-----|------|
| $R_{th(j-mb)}$ | thermal resistance from junction to mounting base |   | -   | -   | 0.5 | K/W  |
| $R_{th(j-a)}$  | thermal resistance from junction to ambient       |   |     |     |     |      |
|                | SOT78A (TO-220AB)                                 | vertical in free air                                  | -   | 60  | -   | K/W  |
|                | SOT404 (D2PAK)                                    | mounted on a printed-circuit board; minimum footprint | -   | 50  | -   | K/W  |

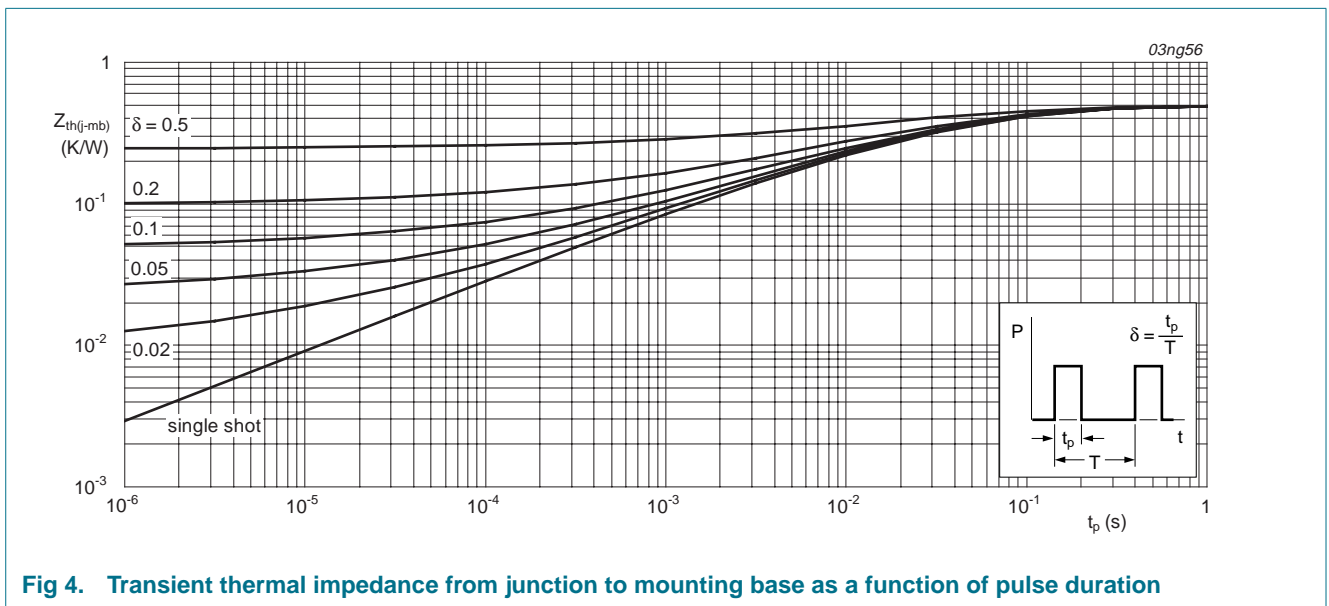


**Fig 4. Transient thermal impedance from junction to mounting base as a function of pulse duration**

## 6. Characteristics


**Table 5. Characteristics**
 $T_j = 25\text{ °C}$  unless otherwise specified.

| Symbol                         | Parameter                        | Conditions  | Min | Typ  | Max  | Unit          |
|--------------------------------|----------------------------------|---|-----|------|------|---------------|
| <b>Static characteristics</b>  |                                  |   |     |      |      |               |
| $V_{(BR)DSS}$                  | drain-source breakdown voltage   | $I_D = 250\ \mu\text{A}$ ; $V_{GS} = 0\ \text{V}$   |     |      |      |               |
|                                |                                  | $T_j = 25\text{ °C}$  | 55  | -    | -    | V             |
|                                |                                  | $T_j = -55\text{ °C}$   | 50  | -    | -    | V             |
| $V_{GS(th)}$                   | gate-source threshold voltage    | $I_D = 1\ \text{mA}$ ; $V_{DS} = V_{GS}$ ; see <a href="#">Figure 9</a>                                     |     |      |      |               |
|                                |                                  | $T_j = 25\text{ °C}$  | 2   | 3    | 4    | V             |
|                                |                                  | $T_j = 175\text{ °C}$   | 1   | -    | -    | V             |
|                                |                                  | $T_j = -55\text{ °C}$   | -   | -    | 4.4  | V             |
| $I_{DSS}$                      | drain leakage current            | $V_{DS} = 55\ \text{V}$ ; $V_{GS} = 0\ \text{V}$  |     |      |      |               |
|                                |                                  | $T_j = 25\text{ °C}$  | -   | 0.02 | 1    | $\mu\text{A}$ |
|                                |                                  | $T_j = 175\text{ °C}$   | -   | -    | 500  | $\mu\text{A}$ |
| $I_{GSS}$                      | gate leakage current             | $V_{GS} = \pm 20\ \text{V}$ ; $V_{DS} = 0\ \text{V}$  | -   | 2    | 100  | nA            |
| $R_{DS(on)}$                   | drain-source on-state resistance | $V_{GS} = 10\ \text{V}$ ; $I_D = 25\ \text{A}$ ;<br>see <a href="#">Figure 6</a> and <a href="#">8</a>      |     |      |      |               |
|                                |                                  | $T_j = 25\text{ °C}$  | -   | 3.4  | 4.0  | m $\Omega$    |
|                                |                                  | $T_j = 175\text{ °C}$   | -   | -    | 8    | m $\Omega$    |
| <b>Dynamic characteristics</b> |                                  |   |     |      |      |               |
| $Q_{G(tot)}$                   | total gate charge                | $I_D = 25\ \text{A}$ ; $V_{DD} = 44\ \text{V}$ ; $V_{GS} = 10\ \text{V}$ ;<br>see <a href="#">Figure 14</a> | -   | 86   | -    | nC            |
| $Q_{GS}$                       | gate-source charge               |   | -   | 18   | -    | nC            |
| $Q_{GD}$                       | gate-drain charge                |   | -   | 25   | -    | nC            |
| $C_{iss}$                      | input capacitance                | $V_{GS} = 0\ \text{V}$ ; $V_{DS} = 25\ \text{V}$ ; $f = 1\ \text{MHz}$ ;<br>see <a href="#">Figure 12</a>   | -   | 5082 | 6776 | pF            |
| $C_{oss}$                      | output capacitance               |   | -   | 1054 | 1265 | pF            |
| $C_{riss}$                     | reverse transfer capacitance     |   | -   | 450  | 617  | pF            |
| $t_{d(on)}$                    | turn-on delay time               | $V_{DS} = 30\ \text{V}$ ; $R_L = 1.2\ \Omega$ ;<br>$V_{GS} = 10\ \text{V}$ ; $R_G = 10\ \Omega$             | -   | 23   | -    | ns            |
| $t_r$                          | rise time                        |   | -   | 51   | -    | ns            |
| $t_{d(off)}$                   | turn-off delay time              |   | -   | 71   | -    | ns            |
| $t_f$                          | fall time                        |   | -   | 41   | -    | ns            |
| $L_D$                          | internal drain inductance        | from drain lead 6 mm from package to center of die  | -   | 4.5  | -    | nH            |
|                                |                                  | from contact screw on mounting base to center of die SOT78A   | -   | 3.5  | -    | nH            |
|                                |                                  | from upper edge of drain mounting base to center of die SOT404  | -   | 2.5  | -    | nH            |
| $L_S$                          | internal source inductance       | from source lead to source bonding pad  | -   | 7.5  | -    | nH            |
| <b>Source-drain diode</b>      |                                  |   |     |      |      |               |
| $V_{SD}$                       | source-drain voltage             | $I_S = 40\ \text{A}$ ; $V_{GS} = 0\ \text{V}$ ; see <a href="#">Figure 15</a>                               | -   | 0.85 | 1.2  | V             |
| $t_{rr}$                       | reverse recovery time            | $I_S = 20\ \text{A}$ ; $dI_S/dt = -100\ \text{A}/\mu\text{s}$ ;   | -   | 95   | -    | ns            |
| $Q_r$                          | recovered charge                 | $V_{GS} = -10\ \text{V}$ ; $V_R = 30\ \text{V}$   | -   | 251  | -    | nC            |

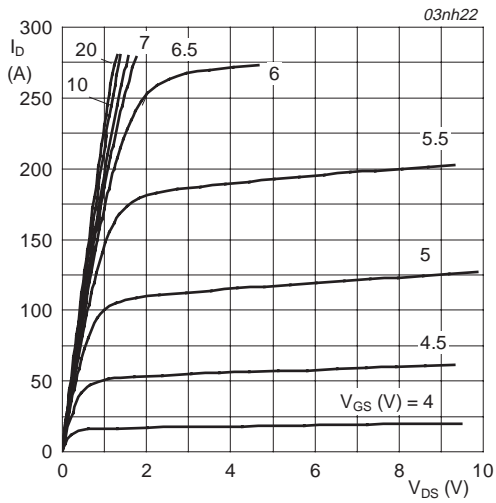


$T_j = 25\text{ }^\circ\text{C}$

**Fig 5. Output characteristics: drain current as a function of drain-source voltage; typical values**

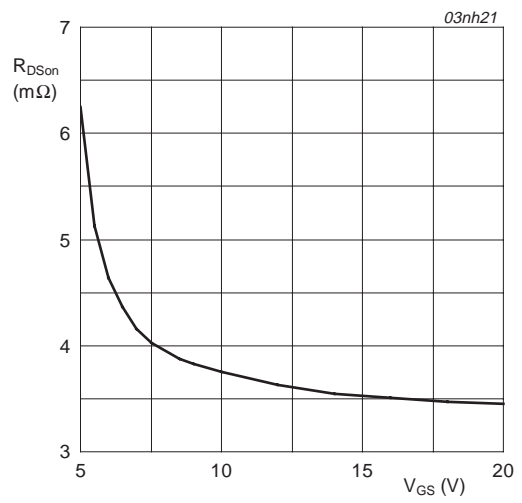


$T_j = 25\text{ }^\circ\text{C}; I_D = 25\text{ A}$

**Fig 6. Drain-source on-state resistance as a function of gate-source voltage; typical values**

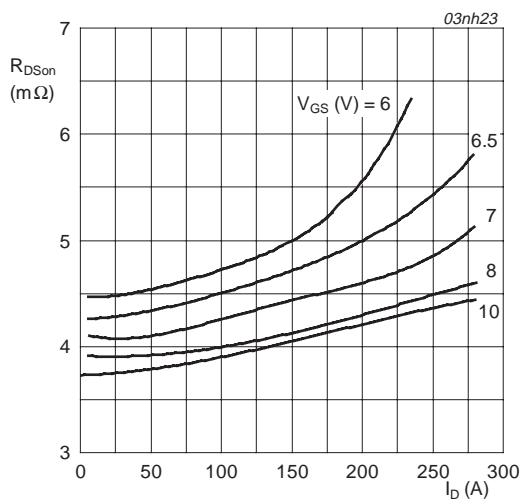


$T_j = 25\text{ }^\circ\text{C}$

**Fig 7. Drain-source on-state resistance as a function of drain current; typical values**

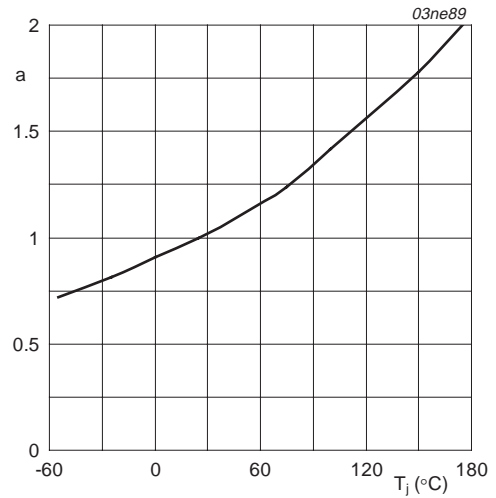


$$a = \frac{R_{DS(on)}}{R_{DS(on)(25^\circ\text{C})}}$$

**Fig 8. Normalized drain-source on-state resistance factor as a function of junction temperature**

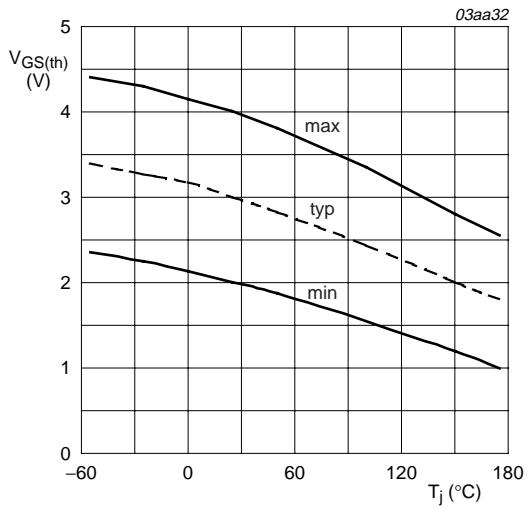


$I_D = 1 \text{ mA}; V_{DS} = V_{GS}$

**Fig 9. Gate-source threshold voltage as a function of junction temperature**

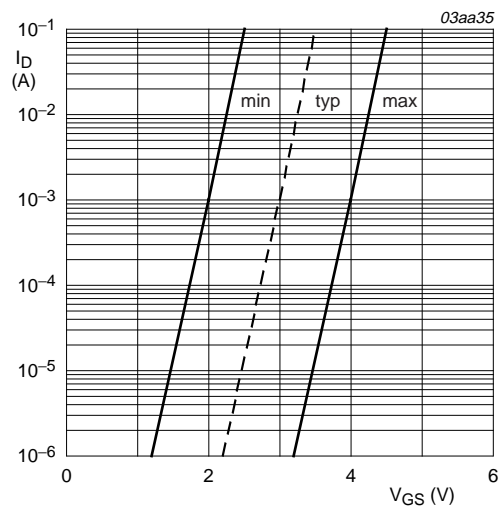


$T_j = 25 \text{ °C}; V_{DS} = V_{GS}$

**Fig 10. Sub-threshold drain current as a function of gate-source voltage**

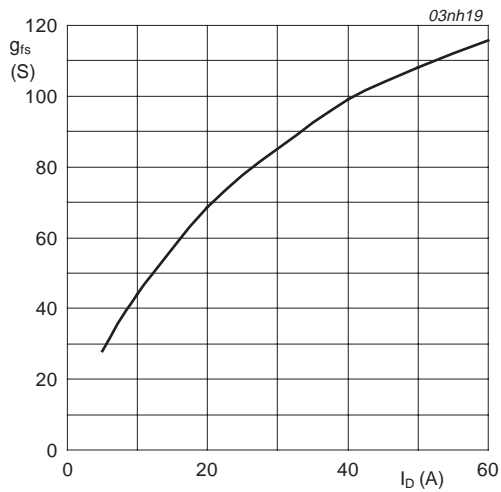


$T_j = 25 \text{ °C}; V_{DS} = 25 \text{ V}$

**Fig 11. Forward transconductance as a function of drain current; typical values**

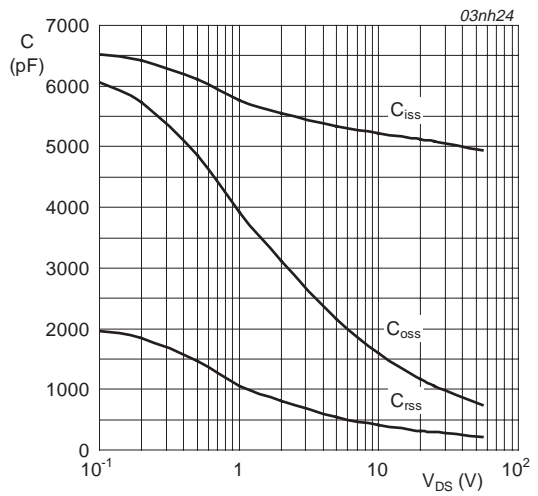


$V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$

**Fig 12. Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values**

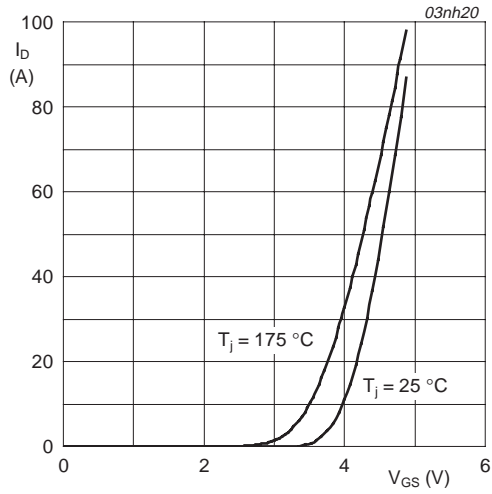


$V_{DS} = 25 \text{ V}$

**Fig 13. Transfer characteristics: drain current as a function of gate-source voltage; typical values**

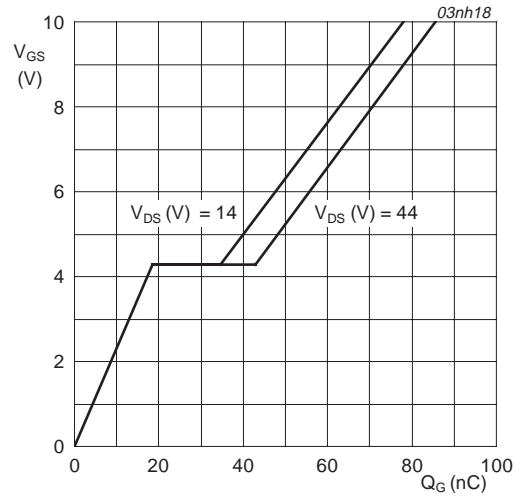


$T_j = 25 \text{ °C}; I_D = 25 \text{ A}$

**Fig 14. Gate-source voltage as a function of gate charge; typical values**

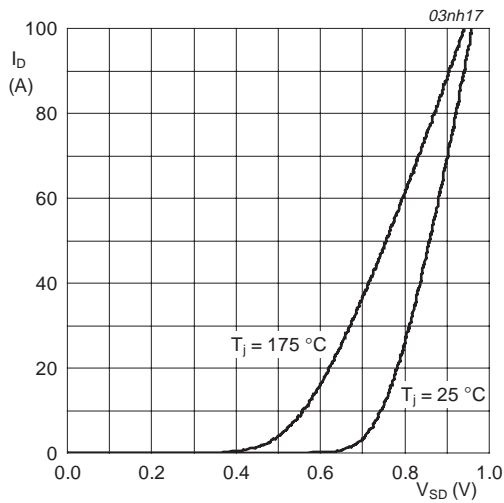

$V_{GS} = 0 \text{ V}$

**Fig 15. Source (diode forward) current as a function of source-drain (diode forward) voltage; typical values**

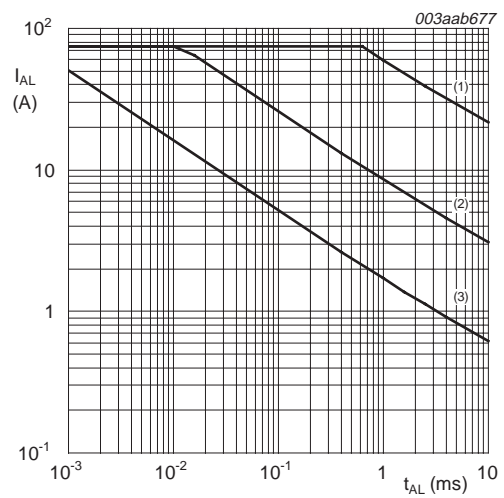

See [Table note 4](#) of [Table 3](#) Limiting values.

- (1) Single-pulse;  $T_j = 25 \text{ °C}$ .
- (2) Single-pulse;  $T_j = 150 \text{ °C}$ .
- (3) Repetitive.

**Fig 16. Single-pulse and repetitive avalanche rating; avalanche current as a function of avalanche time**



**7. Package outline**

Plastic single-ended package; heatsink mounted; 1 mounting hole; 3-lead TO-220AB

SOT78A

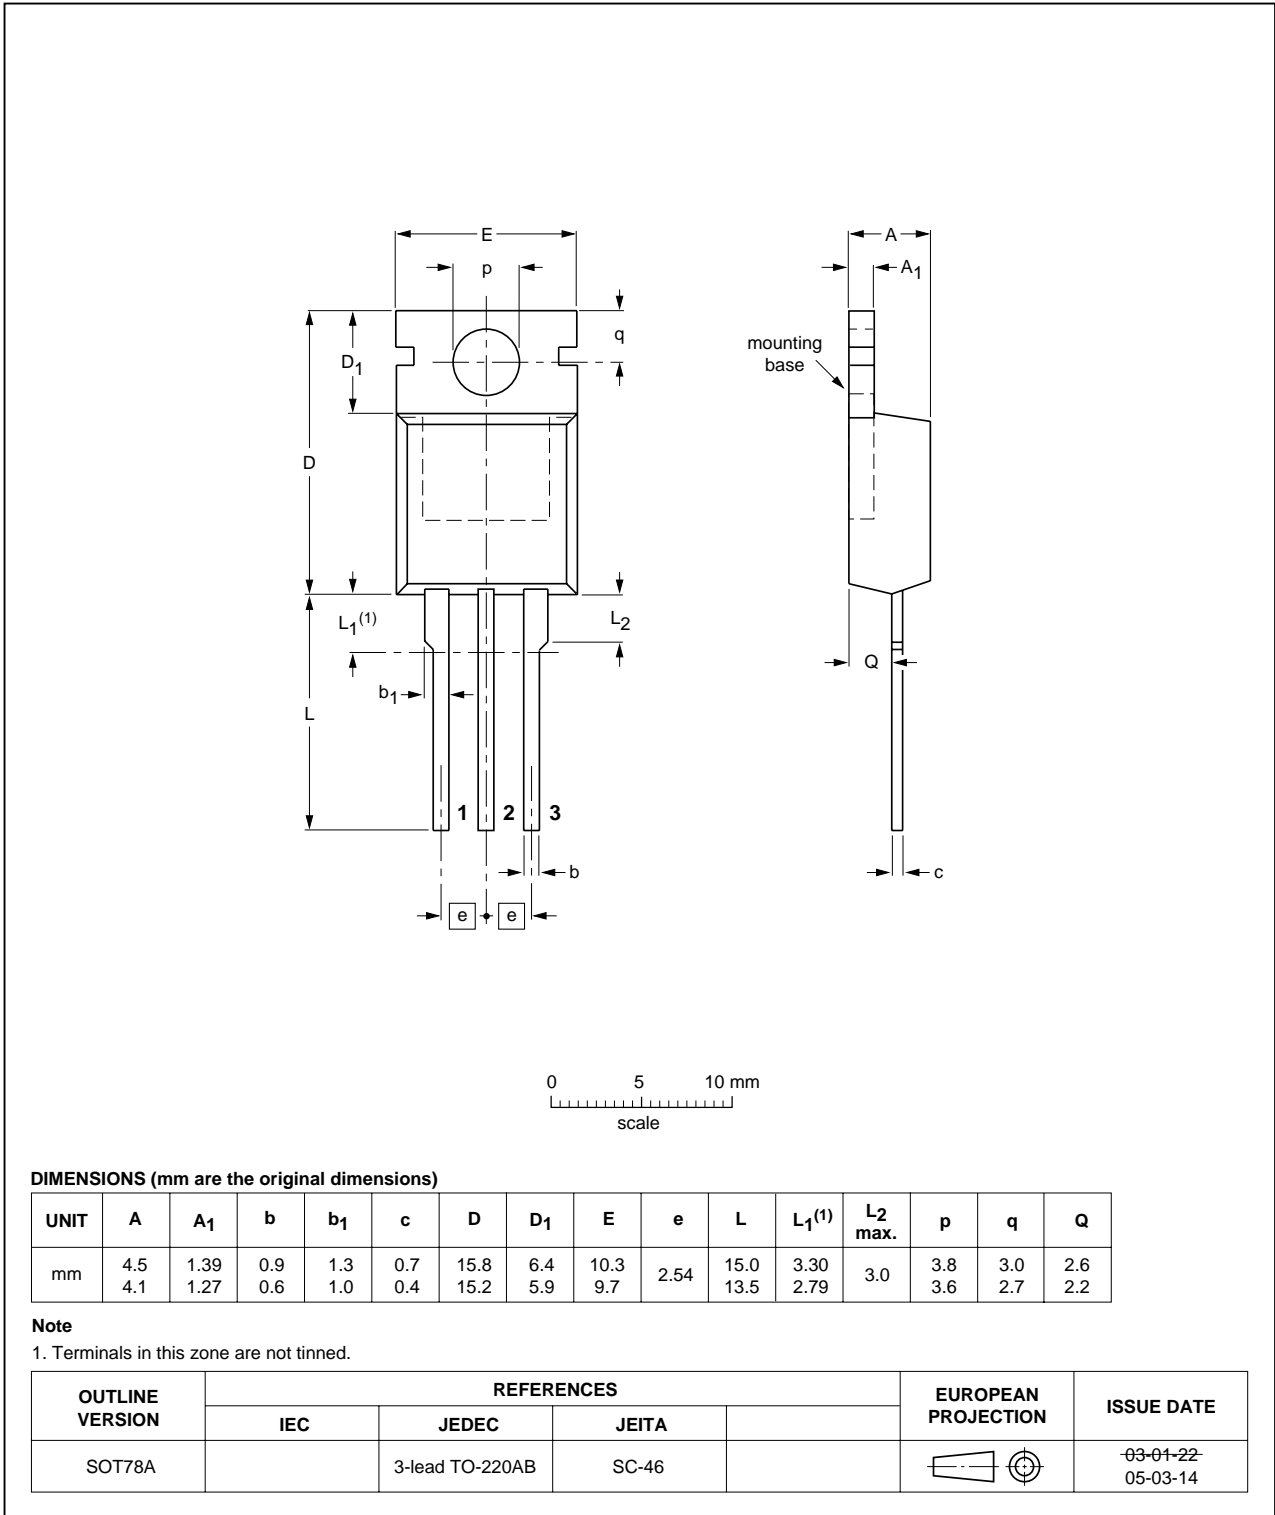


Fig 17. Package outline SOT78A (TO-220AB)

Plastic single-ended surface-mounted package (D2PAK); 3 leads (one lead cropped)

SOT404


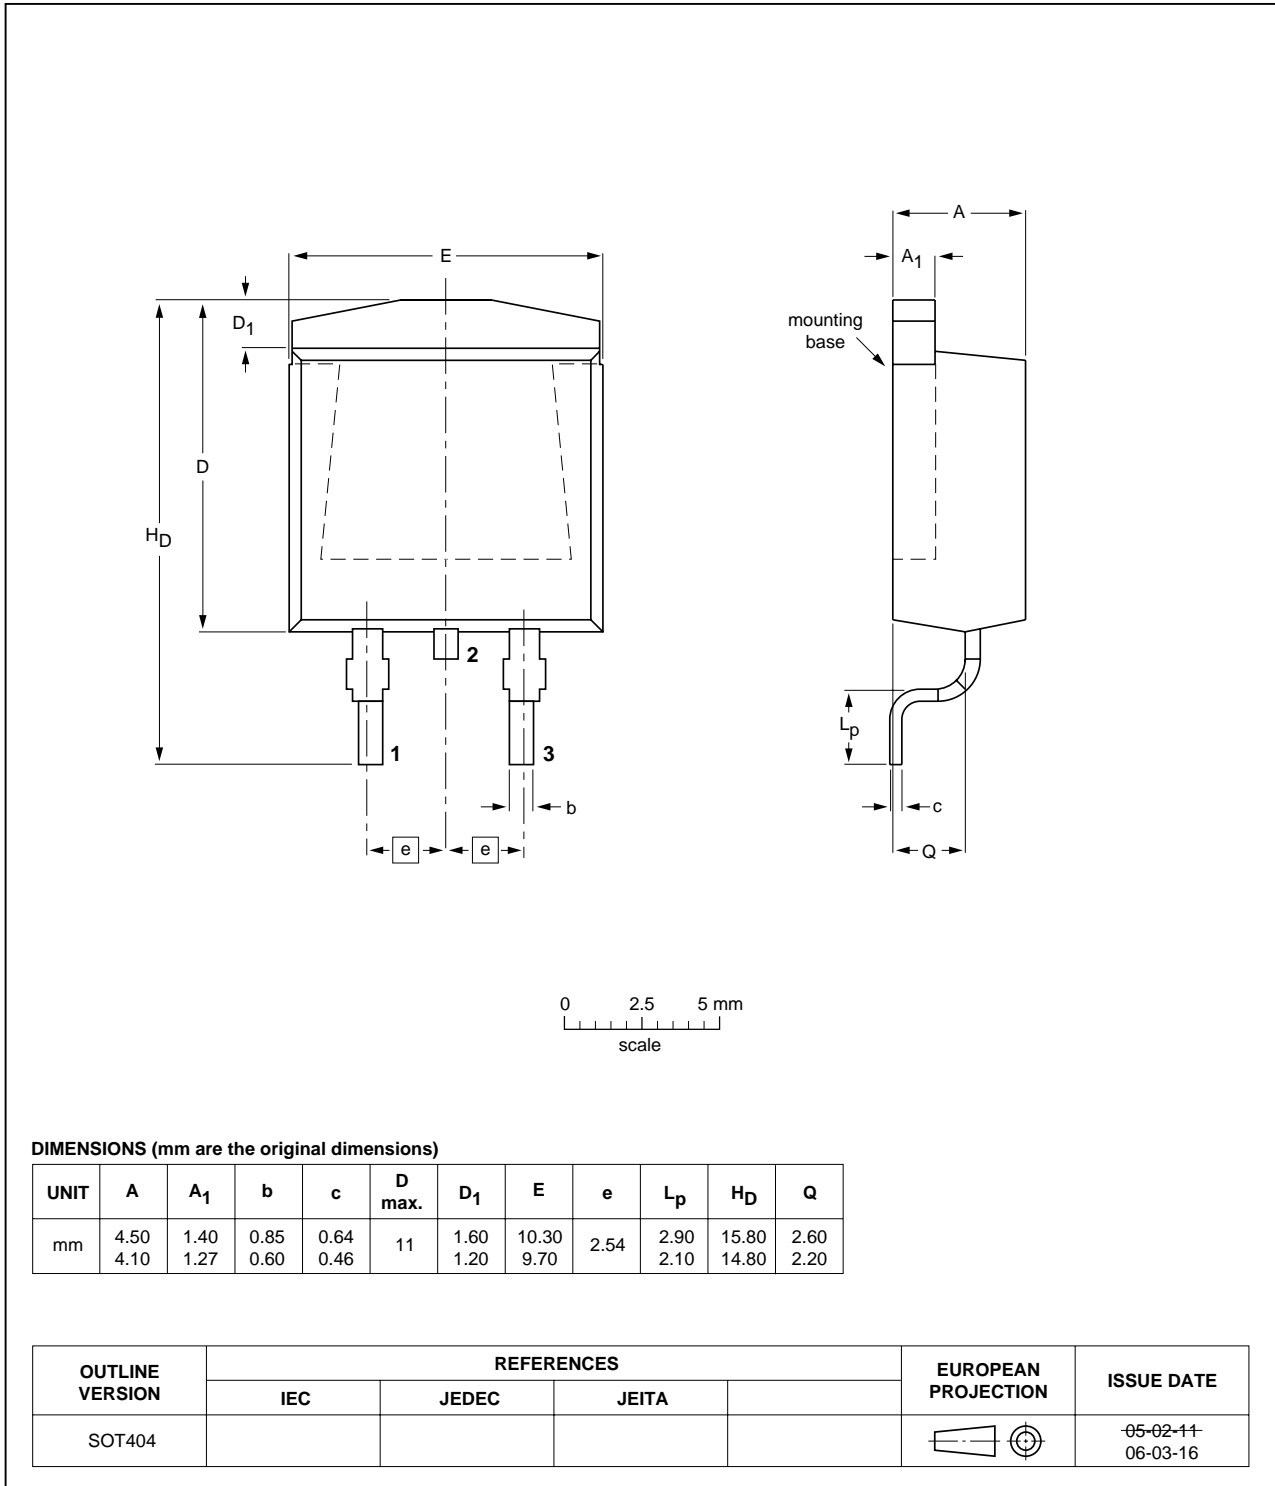


Fig 18. Package outline SOT404 (D2PAK)

## 8. Soldering

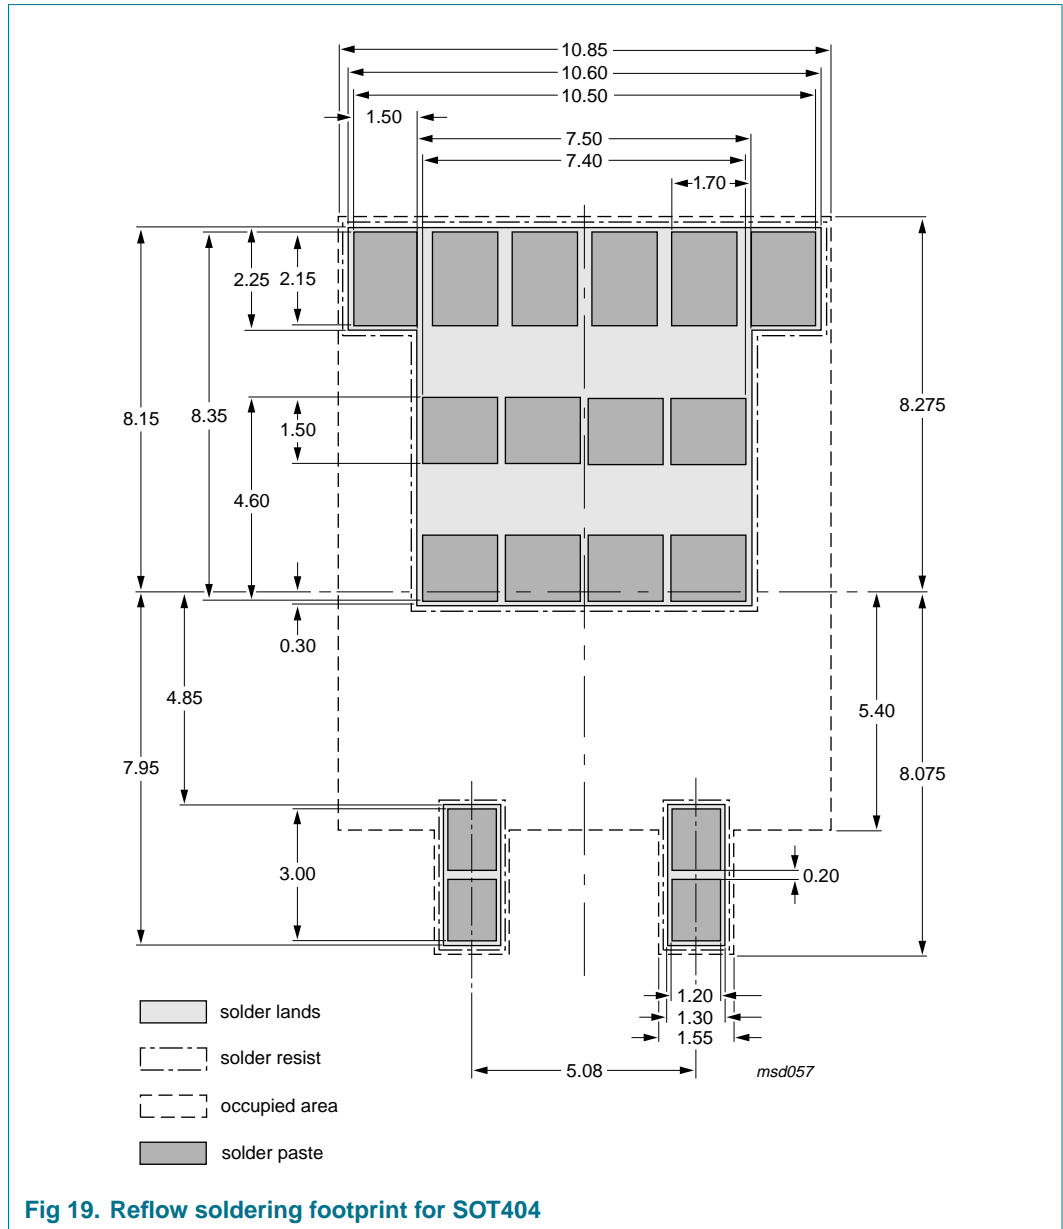

## 9. Revision history

**Table 6. Revision history**

| Document ID        | Release date  | Data sheet status  | Change notice | Supersedes         |
|--------------------|---|--------------------|---------------|--------------------|
| BUK75_764R0-55B_4  | 20071004  | Product data sheet | -             | BUK75_764R0-55B_3  |
| Modifications:     | <ul style="list-style-type: none"><li>• <a href="#">Figure 7</a> updated.</li></ul>   |                    |               |                    |
| BUK75_764R0-55B_3  | 20070124  | Product data sheet | -             | BUK75_764R0_55B-02 |
| Modifications:     | <ul style="list-style-type: none"><li>• The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors.</li><li>• Legal texts have been adapted to the new company name where appropriate.</li><li>• <math>C_{rss}</math> (typ) and (max) value in Section 6 "Characteristics" changed from 289 (typ) and 396 (max) to 450 (typ) and 617 (max).</li></ul> |                    |               |                    |
| BUK75_764R0_55B-02 | 20020930  | Product data sheet | -             | BUK75_764R0_55B-01 |
| BUK75_764R0_55B-01 | 20020328  | Product data sheet | -             | -                  |

## 10. Legal information

### 10.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 10.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 10.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of a NXP Semiconductors product can reasonably be expected to

result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### 10.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**TrenchMOS** — is a trademark of NXP B.V.

## 11. Contact information

For additional information, please visit: <http://www.nxp.com>

For sales office addresses, send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 12. Contents

|           |                                      |           |
|-----------|--------------------------------------|-----------|
| <b>1</b>  | <b>Product profile</b> .....         | <b>1</b>  |
| 1.1       | General description .....            | 1         |
| 1.2       | Features .....                       | 1         |
| 1.3       | Applications .....                   | 1         |
| 1.4       | Quick reference data .....           | 1         |
| <b>2</b>  | <b>Pinning information</b> .....     | <b>1</b>  |
| <b>3</b>  | <b>Ordering information</b> .....    | <b>2</b>  |
| <b>4</b>  | <b>Limiting values</b> .....         | <b>2</b>  |
| <b>5</b>  | <b>Thermal characteristics</b> ..... | <b>4</b>  |
| <b>6</b>  | <b>Characteristics</b> .....         | <b>5</b>  |
| <b>7</b>  | <b>Package outline</b> .....         | <b>9</b>  |
| <b>8</b>  | <b>Soldering</b> .....               | <b>11</b> |
| <b>9</b>  | <b>Revision history</b> .....        | <b>12</b> |
| <b>10</b> | <b>Legal information</b> .....       | <b>13</b> |
| 10.1      | Data sheet status .....              | 13        |
| 10.2      | Definitions .....                    | 13        |
| 10.3      | Disclaimers .....                    | 13        |
| 10.4      | Trademarks .....                     | 13        |
| <b>11</b> | <b>Contact information</b> .....     | <b>13</b> |
| <b>12</b> | <b>Contents</b> .....                | <b>14</b> |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



© NXP B.V. 2007.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 4 October 2007

Document identifier: BUK75\_764R0-55B\_4