

PQxxxEH02ZxH Series

Low Voltage Operation
Low Power-Loss Voltage Regulators

■ Features

- 1.Low voltage operation
(Minimum operating voltage: 2.35V)
2.5V input → available 1.5 to 1.8V output
- 2.Large output current type (I_o: 2A)
- 3.Low dissipation current
(Quiescent current : MAX. 2mA
Output OFF-state dissipation current: MAX.5μA)
- 4.Low power-loss
- 5.Built-in overcurrent and overheat protection functions
- 6.TO-263 package
- 7.RoHS directive compliant

■ Applications

- 1.Personal computers and peripheral equipment
- 2.Power supplies for various digital electronic equipment such as DVD player or STB
- 3.Power supplies for automotive equipment such as car navigation system

■ Model Line-up

| Output current (I _o) | Package type | Output voltage (V _o) | | |
|----------------------------------|--------------|----------------------------------|--------------|--------------|
| | | 1.5V | 1.8V | 2.5V |
| 2A | Taping | PQ015EH02ZPH | PQ018EH02ZPH | PQ025EH02ZPH |
| | Sleeve | PQ015EH02ZZH | PQ018EH02ZZH | PQ025EH02ZZH |

■ Absolute Maximum Ratings


(T_a=25°C)

| Parameter | Symbol | Rating | Unit |
|---------------------------|------------------|-------------|------|
| *1 Input voltage | V _{IN} | 10 | V |
| *1 Output control voltage | V _C | 10 | V |
| Output current | I _o | 2 | A |
| *2 Power dissipation | P _D | 35 | W |
| *3 Junction temperature | T _J | 150 | °C |
| Operating temperature | T _{opr} | -40 to +85 | °C |
| Storage temperature | T _{stg} | -40 to +150 | °C |
| Soldering temperature | T _{sol} | 260(10s) | °C |

*1 All are open except GND and applicable terminals.
*2 P_D:With infinite heat sink
*3 Overheat protection may operate at T_J:125°C to 150°C

■ Outline Dimensions

(Unit : mm)

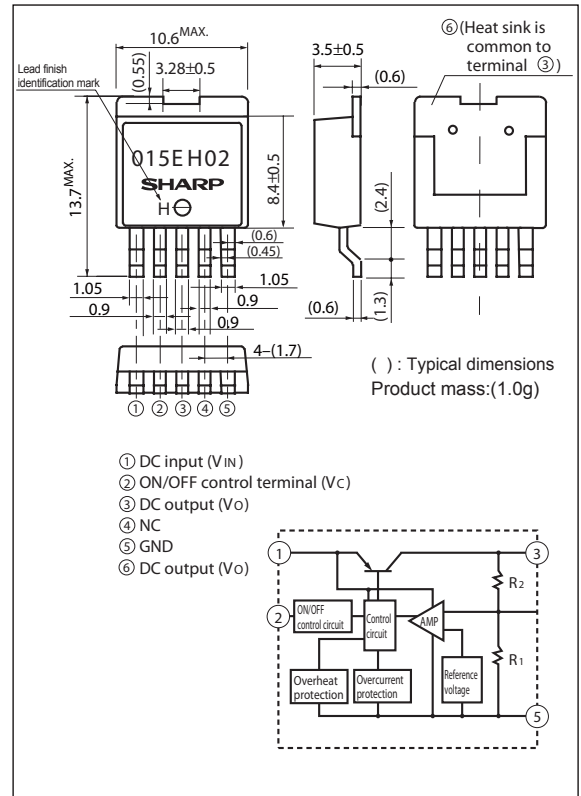

Lead finish:Lead-free solder plating
(Composition: Sn2Cu)

Notice The content of data sheet is subject to change without prior notice.
In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

Electrical Characteristics

(Unless otherwise specified, condition shall be $V_{IN}=V_O(TYP.)+1V$, $I_O=1A$, $V_C=2.7V$, $T_a=25^\circ C$)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---|--------------|---|--------------------------|------------|------|---------------|
| Input voltage | V_{IN} | - | Refer to the table below | | | V |
| Output voltage | V_O | - | Refer to the table below | | | V |
| Load regulation | Reg_L | $I_O=5mA$ to 2A | - | 0.2 | 2.0 | % |
| Line regulation | Reg_L | $V_{IN}=V_O(TYP.)+1V$ to $V_O(TYP.)+6V$, $I_O=5mA$ | - | 0.1 | 1.0 | % |
| Temperature coefficient of output voltage | TcV_O | $T_j=0$ to $+125^\circ C$, $I_O=5mA$ | - | ± 0.01 | - | %/ $^\circ C$ |
| Ripple rejection | RR | Refer to Fig.2 | 45 | 60 | - | dB |
| *4 ON-state voltage for control | $V_{C(ON)}$ | - | 2.0 | - | - | V |
| ON-state current for control | $I_{C(ON)}$ | - | - | - | 200 | μA |
| OFF-state voltage for control | $V_{C(OFF)}$ | - | - | - | 0.8 | V |
| OFF-state current for control | $I_{C(OFF)}$ | $V_C=0.4V$ | - | - | 2 | μA |
| Quiescent current | I_q | $I_O=0A$ | - | 1 | 2 | mA |
| Output OFF-state dissipation current | I_{qs} | $I_O=0A$, $V_C=0.4V$ | - | - | 5 | μA |

*4 In case of opening control terminal ②, output voltage turns off

Input Voltage range

| Model No. | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------|----------|--|------|------|------|------|
| PQ015EH02ZxH | V_{IN} | $I_O=2A$, $V_C=2.7V$, $T_a=25^\circ C$ | 2.35 | - | 10 | V |
| PQ018EH02ZxH | | | 2.35 | - | 10 | |
| PQ025EH02ZxH | | | 3.0 | - | 10 | |

Output Voltage

| Model No. | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------|--------|--|-------|------|-------|------|
| PQ015EH02ZxH | V_O | $V_{IN}=V_O(TYP.)+1V$, $I_O=1A$, $V_C=2.7V$, $T_a=25^\circ C$ | 1.45 | 1.5 | 1.55 | V |
| PQ018EH02ZxH | | | 1.75 | 1.8 | 1.85 | |
| PQ025EH02ZxH | | | 2.438 | 2.5 | 2.562 | |

Fig.1 Test Circuit



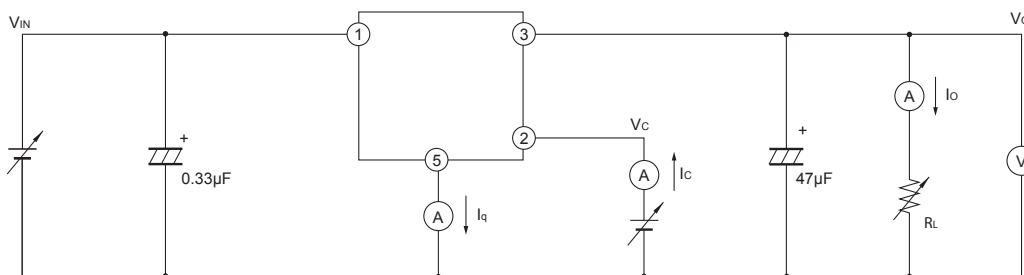


Fig.2 Test circuit of Ripple Rejection

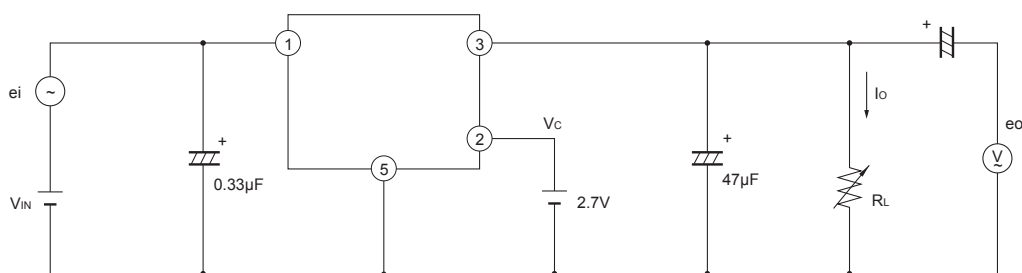

$f=120Hz$ (sine wave)
 $e_i(rms)=0.5V$
 $V_{IN}=V_O(TYP.)+2V$
 $I_O=0.3A$
 $RR=20\log(e_i(rms)/e_o(rms))$

Fig.3 Power Dissipation vs. Ambient Temperature

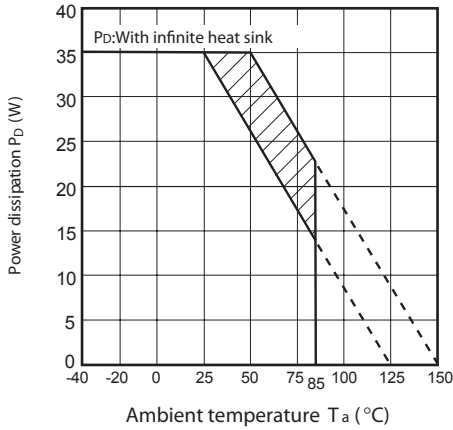

Note) Oblique line portion: Overheat protection may operate in this area.

Fig.4 Overcurrent Protection Characteristics (PQ015EH02ZxH)

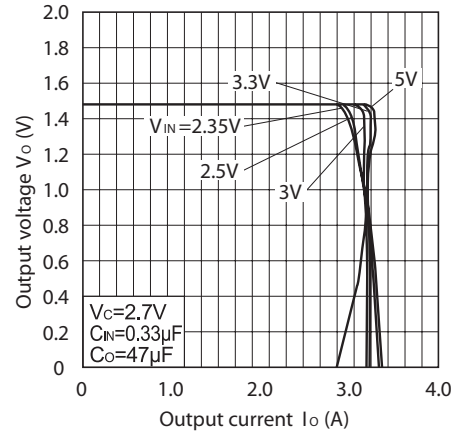


Fig.5 Overcurrent Protection Characteristics (PQ018EH02ZxH)

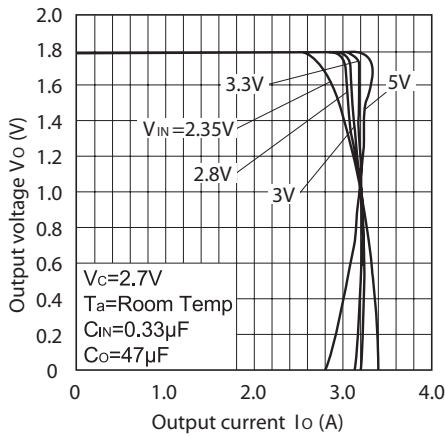


Fig.6 Overcurrent Protection Characteristics (PQ025EH02ZxH)

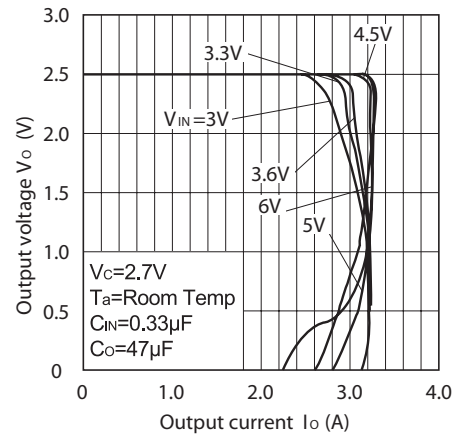


Fig.7 Output Voltage Fluctuation vs. Junction Temperature (PQ015EH02ZxH)

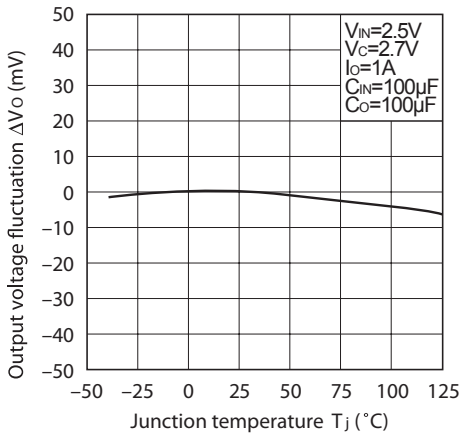


Fig.8 Output Voltage Fluctuation vs. Junction Temperature (PQ018EH02ZxH)

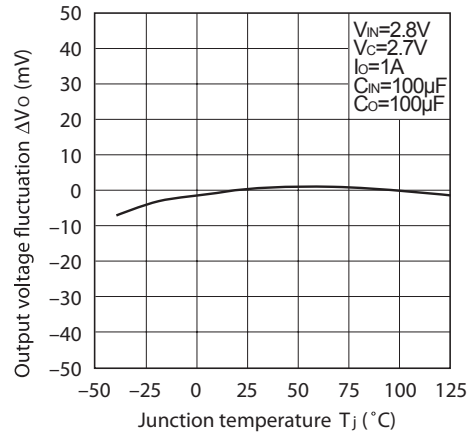


Fig.9 Output Voltage Fluctuation vs. Junction Temperature (PQ025EH02ZxH)

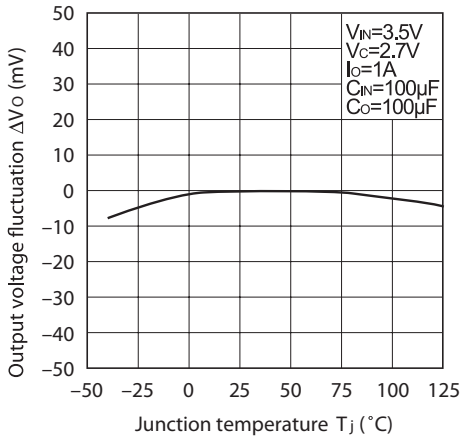


Fig.10 Output Voltage vs. Input Voltage (PQ015EH02ZxH)

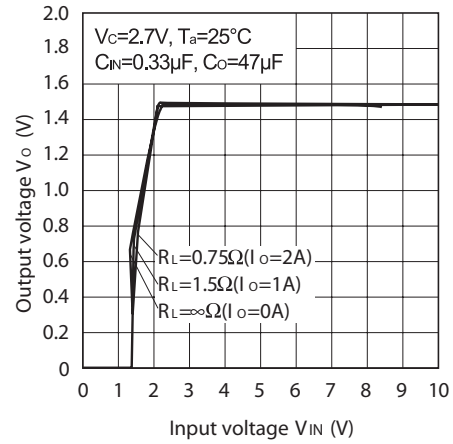


Fig.11 Output Voltage vs. Input Voltage (PQ018EH02ZxH)

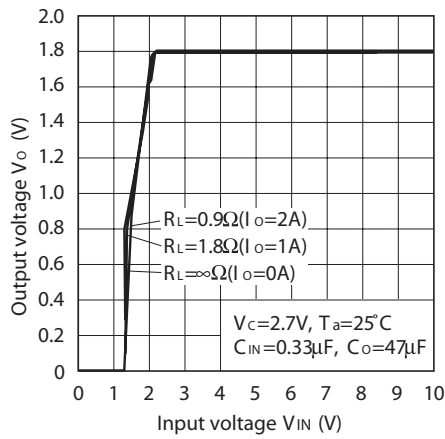


Fig.12 Output Voltage vs. Input Voltage (PQ025EH02ZxH)

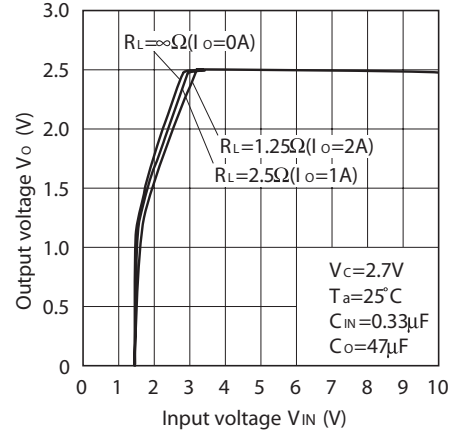


Fig.13 Circuit Operating Current vs. Input Voltage (PQ015EH02ZxH)

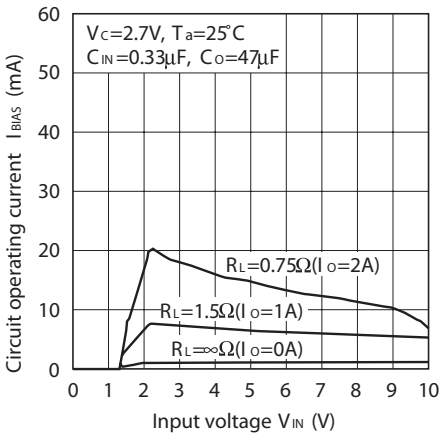


Fig.14 Circuit Operating Current vs. Input Voltage (PQ018EH02ZxH)

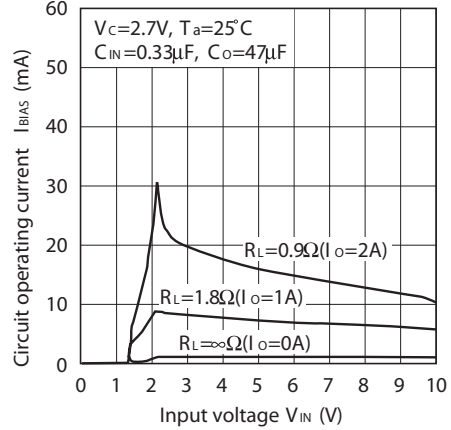


Fig.15 Circuit Operating Current vs. Input Voltage (PQ025EH02ZxH)

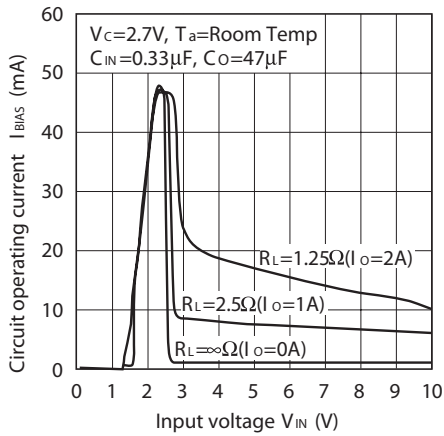


Fig.16 Quiescent Current vs. Junction Temperature

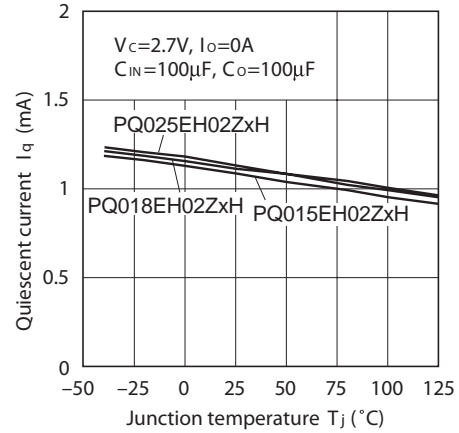


Fig.17 ON-OFF Control Voltage vs. Junction Temperature

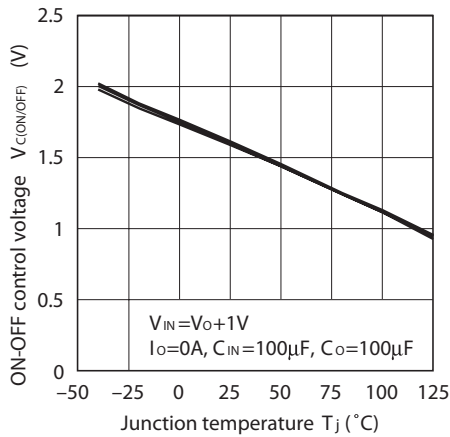


Fig.18 Ripple Rejection vs. Input Ripple Frequency

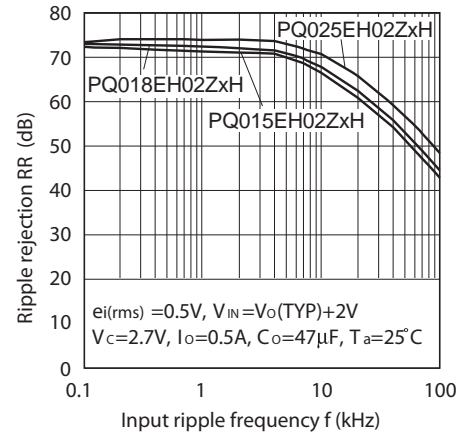


Fig.19 Ripple Rejection vs. Output Current



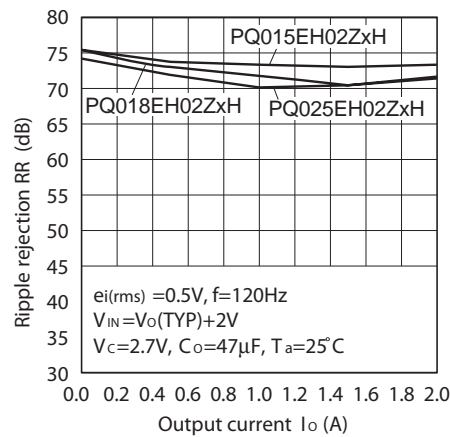


Fig.20 Power Dissipation vs. Ambient Temperature (Typical Value)

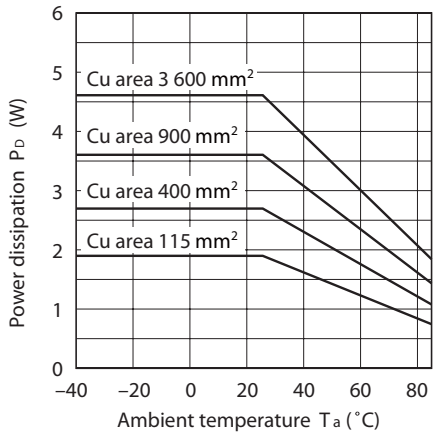

Mounting PCB



Material : Glass-cloth epoxy resin
 Size : 60×60×1.6mm
 Cu thickness : 65μm

Fig.21 Typical Application

