


## 3A LOW DROP POSITIVE VOLTAGE REGULATOR ADJUSTABLE AND FIXED

- TYPICAL DROPOUT 1.3V (AT 3A)
- THREE TERMINAL ADJUSTABLE OR FIXED OUTPUT VOLTAGE 1.2V, 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 3.6V, 5V, 8V, 9V, 12V.
- GUARANTEED OUTPUT CURRENT UP TO 3A
- OUTPUT TOLERANCE  $\pm 1\%$  AT 25°C AND  $\pm 2\%$  IN FULL TEMPERATURE RANGE
- INTERNAL POWER AND THERMAL LIMIT
- WIDE OPERATING TEMPERATURE RANGE -40°C TO 125°C
- PACKAGE AVAILABLE: TO-220, TO-220FP D<sup>2</sup>PAK, D<sup>2</sup>PAK/A
- PINOUT COMPATIBILITY WITH STANDARD ADJUSTABLE VREG

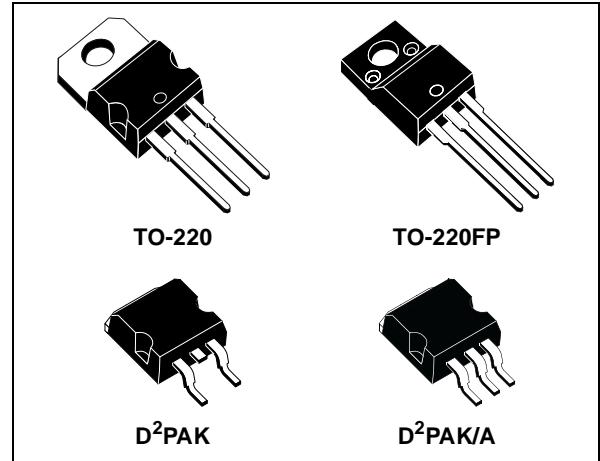


### DESCRIPTION

The LD1085 is a LOW DROP Voltage Regulator able to provide up to 3A of Output Current. Dropout is guaranteed at a maximum of 1.2V at the maximum output current, decreasing at lower loads. The LD1085 is pin to pin compatible with the older 3-terminal adjustable regulators, but has better performances in term of drop and output tolerance.

A 2.85V output version is suitable for SCSI-2 active termination. Unlike PNP regulators, where a part of the output current is wasted as quiescent current, the LD1085 quiescent current flows into the load, so increase efficiency. Only a 10µF minimum capacitor is need for stability.


The device is supplied in TO-220, TO-220FP, D<sup>2</sup>PAK and D<sup>2</sup>PAK/A. On chip trimming allows the regulator to reach a very tight output voltage tolerance, within  $\pm 1\%$  at 25°C.

**Figure 1: Schematic Diagram**

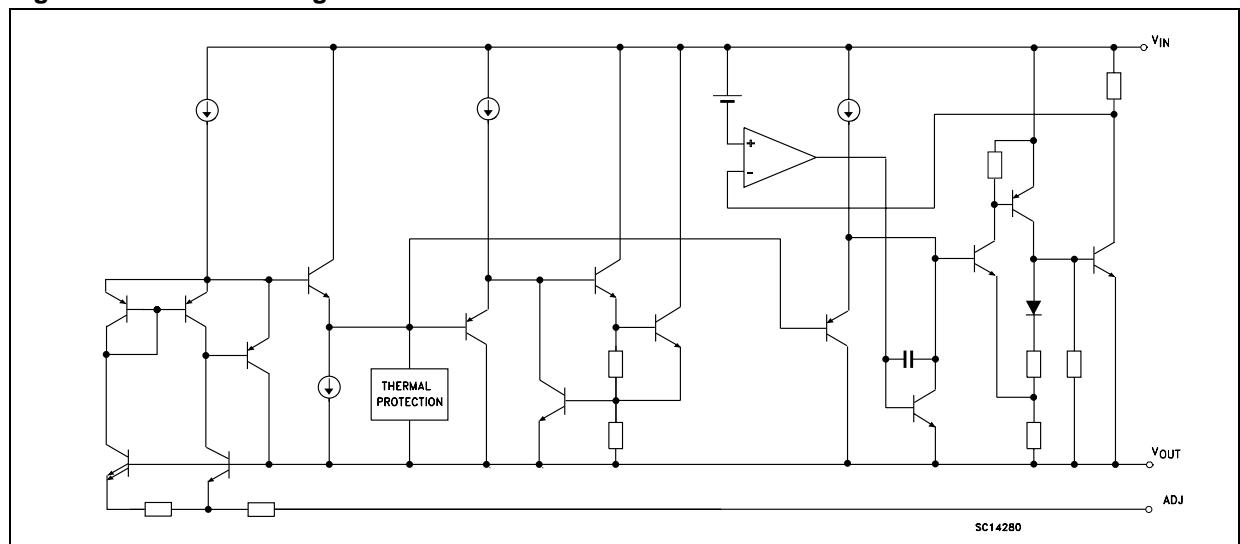

# LD1085 SERIES

**Figure 2: Pin Connection (top view)**

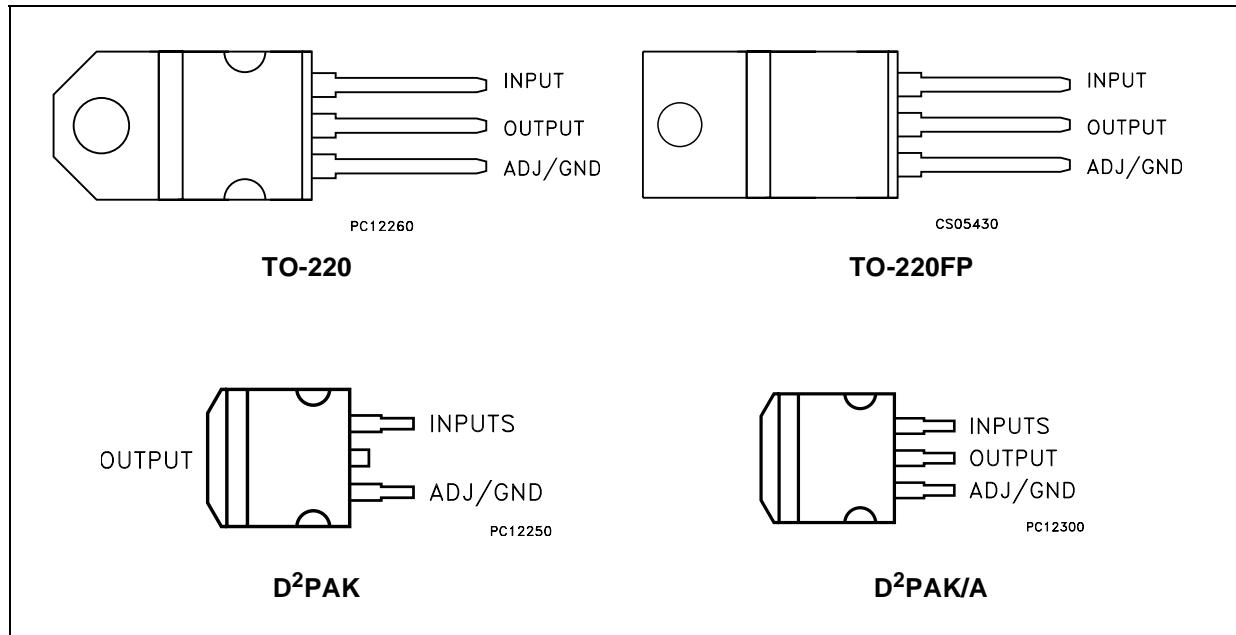

**Table 1: Order Codes**

TO-220	TO-220FP	D <sup>2</sup> PAK (*)	D <sup>2</sup> PAK/A (*)	OUTPUT VOLTAGE
LD1085V12	LD1085P12	LD1085D2T12	LD1085D2M12	1.2 V
LD1085V15	LD1085P15	LD1085D2T15	LD1085D2M15	1.5 V
LD1085V18	LD1085P18	LD1085D2T18	LD1085D2M18	1.8 V
LD1085V25	LD1085P25	LD1085D2T25	LD1085D2M25	2.5 V
LD1085V28	LD1085P28	LD1085D2T28	LD1085D2M28	2.85 V
LD1085V33	LD1085P33	LD1085D2T33	LD1085D2M33	3.3 V
LD1085V36	LD1085P36	LD1085D2T36	LD1085D2M36	3.6 V
LD1085V50	LD1085P50	LD1085D2T50	LD1085D2M50	5.0 V
LD1085V80	LD1085P80	LD1085D2T80	LD1085D2M80	8.0 V
LD1085V90	LD1085P90	LD1085D2T90	LD1085D2M90	9.0 V
LD1085V12	LD1085P12	LD1085D2T12	LD1085D2M12	12.0 V
LD1085V	LD1085P	LD1085D2T	LD1085D2M	ADJ

(\*) Available in Tape & Reel with the suffix "R" for fixed version and "-R" for adjustable version.


**Table 2: Absolute Maximum Ratings**

Symbol	Parameter	Value	Unit
V <sub>I</sub>	DC Input Voltage	30	V
I <sub>O</sub>	Output Current	Internally Limited	mA
P <sub>D</sub>	Power Dissipation	Internally Limited	mW
T <sub>stg</sub>	Storage Temperature Range	-55 to +150	°C
T <sub>op</sub>	Operating Junction Temperature Range	-40 to +125	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

**Table 3: Thermal Data**

Symbol	Parameter	TO-220	D <sup>2</sup> PAK	Unit
R <sub>thj-case</sub>	Thermal Resistance Junction-case	3	3	°C/W
R <sub>thj-amb</sub>	Thermal Resistance Junction-ambient	50	62.5	°C/W

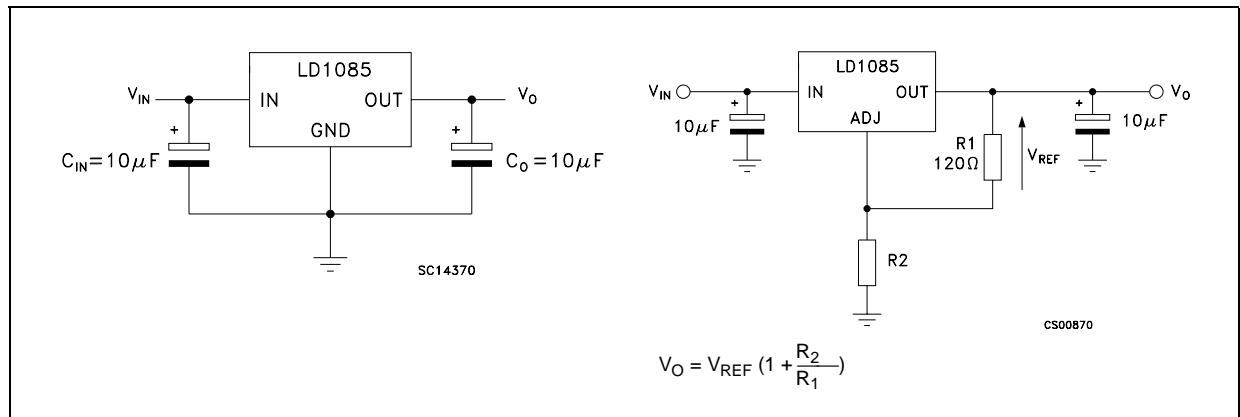**Figure 3: Application Circuits****Table 4: Electrical Characteristics Of LD1085#12 (V<sub>I</sub>=4.5V, C<sub>I</sub> = C<sub>O</sub> =10μF, T<sub>A</sub> = -40 to 125°C, unless otherwise specified.)**

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V <sub>O</sub>	Output Voltage	I <sub>O</sub> = 0 mA	T <sub>J</sub> = 25°C	1.485	1.5	1.515	V
		I <sub>O</sub> = 0 to 5A	V <sub>I</sub> = 3.1 to 30V (note 1)	1.47	1.5	1.53	V
ΔV <sub>O</sub>	Line Regulation	I <sub>O</sub> = 0 mA	V <sub>I</sub> = 3.1 to 18V	T <sub>J</sub> = 25°C	0.2	4	mV
		I <sub>O</sub> = 0 mA	V <sub>I</sub> = 3.1 to 15V		0.4	4	mV
ΔV <sub>O</sub>	Load Regulation	I <sub>O</sub> = 0 to 3A	T <sub>J</sub> = 25°C		2	10	mV
		I <sub>O</sub> = 0 to 3A			4	20	V
V <sub>d</sub>	Dropout Voltage	I <sub>O</sub> = 3 A			1.3	1.5	V
I <sub>q</sub>	Quiescent Current	V <sub>I</sub> ≤ 30V			5	10	mA
I <sub>sc</sub>	Short Circuit Current	V <sub>I</sub> - V <sub>O</sub> = 5V		3.2	4.5		A
		V <sub>I</sub> - V <sub>O</sub> = 25V		0.2	0.5		A
	Thermal Regulation	T <sub>A</sub> = 25°C, 30ms pulse			0.008	0.04	%/W
SVR	Supply Voltage Rejection	f = 120 Hz, C <sub>O</sub> = 25 μF, I <sub>O</sub> = 3A V <sub>I</sub> = 7.5 ± 3V		60	72		dB
eN	RMS Output Noise Voltage (% of V <sub>O</sub> )	T <sub>A</sub> = 25°C f = 10Hz to 10KHz			0.003		%
S	Temperature Stability				0.5		%
S	Long Term Stability	T <sub>A</sub> = 125°C 1000Hrs			0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 5: Electrical Characteristics Of LD1085#15 ( $V_I=4.5V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

<b>Symbol</b>	<b>Parameter</b>	<b>Test Conditions</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	1.485	1.5	1.515	V
		$I_O = 0 \text{ to } 5A V_I = 3.1 \text{ to } 30V$ (note 1)	1.47	1.5	1.53	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 3.1 \text{ to } 18V T_J = 25^\circ C$		0.2	4	mV
		$I_O = 0 \text{ mA } V_I = 3.1 \text{ to } 15V$		0.4	4	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		2	10	mV
		$I_O = 0 \text{ to } 3A$		4	20	V
$V_d$	Dropout Voltage	$I_O = 3 A$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 7.5 \pm 3V$	60	72		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 6: Electrical Characteristics Of LD1085#18 ( $V_I=4.8V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

<b>Symbol</b>	<b>Parameter</b>	<b>Test Conditions</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	1.782	1.8	1.818	V
		$I_O = 0 \text{ to } 5A V_I = 3.4 \text{ to } 30V$ (note 1)	1.764	1.8	1.836	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 3.4 \text{ to } 18V T_J = 25^\circ C$		0.2	4	mV
		$I_O = 0 \text{ mA } V_I = 3.4 \text{ to } 15V$		0.4	4	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		2	10	mV
		$I_O = 0 \text{ to } 3A$		4	20	V
$V_d$	Dropout Voltage	$I_O = 3 A$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 7.5 \pm 3V$	60	72		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 7: Electrical Characteristics Of LD1085#25 ( $V_I=5.5V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	2.475	2.5	2.525	V
		$I_O = 0 \text{ to } 3A V_I = 4.1 \text{ to } 30V$ (note 1)	2.45	2.5	2.55	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 4.1 \text{ to } 18V T_J = 25^\circ C$		0.2	4	mV
		$I_O = 0 \text{ mA } V_I = 4.1 \text{ to } 18V$		0.4	4	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		2	10	mV
		$I_O = 0 \text{ to } 3A$		4	20	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 7.5 \pm 3V$	60	72		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 8: Electrical Characteristics Of LD1085#285 ( $V_I=5.85V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	2.821	2.85	2.879	V
		$I_O = 0 \text{ to } 3A V_I = 4.5 \text{ to } 30V$ (note 1)	2.793	2.85	2.907	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 4.5 \text{ to } 18V T_J = 25^\circ C$		0.2	6	mV
		$I_O = 0 \text{ mA } V_I = 4.5 \text{ to } 18V$		0.5	6	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		3	15	mV
		$I_O = 0 \text{ to } 3A$		7	20	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 7.85 \pm 3V$	60	72		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

## LD1085 SERIES

**Table 9: Electrical Characteristics Of LD1085#33 ( $V_I=6.3V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	3.267	3.3	3.333	V
		$I_O = 0 \text{ to } 3A V_I = 4.9 \text{ to } 30V$ (note 1)	3.234	3.35	3.366	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 4.9 \text{ to } 18V T_J = 25^\circ C$		0.5	6	mV
		$I_O = 0 \text{ mA } V_I = 4.9 \text{ to } 18V$		1	6	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		3	15	mV
		$I_O = 0 \text{ to } 3A$		7	20	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C$ , 30ms pulse		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 5A V_I = 8.3 \pm 3V$	60	72		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C$ 1000Hrs		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 10: Electrical Characteristics Of LD1085#36 ( $V_I=6.6V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	3.564	3.6	3.636	V
		$I_O = 0 \text{ to } 3A V_I = 5.2 \text{ to } 30V$ (note 1)	3.528	3.6	3.672	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 5.2 \text{ to } 18V T_J = 25^\circ C$		0.5	10	mV
		$I_O = 0 \text{ mA } V_I = 5.2 \text{ to } 18V$		1	10	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		3	15	mV
		$I_O = 0 \text{ to } 3A$		7	20	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C$ , 30ms pulse		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A V_I = 8.6 \pm 3V$	60	72		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C$ 1000Hrs		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 11: Electrical Characteristics Of LD1085#50** ( $V_I = 8V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	4.95	5	5.05	V
		$I_O = 0 \text{ to } 3A V_I = 6.6 \text{ to } 30V$ (note 1)	4.9	5	5.1	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 6.6 \text{ to } 20V T_J = 25^\circ C$		0.5	10	mV
		$I_O = 0 \text{ mA } V_I = 6.6 \text{ to } 20V$		1	10	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		5	10	mV
		$I_O = 0 \text{ to } 3A$		10	35	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 10 \pm 3V$	60	72		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 12: Electrical Characteristics Of LD1085#80** ( $V_I = 11V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	7.92	8	8.08	V
		$I_O = 0 \text{ to } 3A V_I = 9.8 \text{ to } 30V$ (note 1)	7.84	8	8.16	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 9.8 \text{ to } 20V T_J = 25^\circ C$		1	18	mV
		$I_O = 0 \text{ mA } V_I = 9.8 \text{ to } 20V$		2	18	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		8	30	mV
		$I_O = 0 \text{ to } 3A$		12	60	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 13 \pm 3V$	54	71		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

## LD1085 SERIES

**Table 13: Electrical Characteristics Of LD1085#90 ( $V_I=12V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	8.91	9	9.09	V
		$I_O = 0 \text{ to } 3A V_I = 11 \text{ to } 30V$ (note 1)	8.82	9	9.18	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 11 \text{ to } 20V \quad T_J = 25^\circ C$		1	20	mV
		$I_O = 0 \text{ mA } V_I = 11 \text{ to } 20V$		2	20	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		8	30	mV
		$I_O = 0 \text{ to } 3A$		12	60	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 14 \pm 3V$	54	70		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C \quad f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 14: Electrical Characteristics Of LD1085#12 ( $V_I=15V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 0 \text{ mA } T_J = 25^\circ C$	11.88	12	12.12	V
		$I_O = 0 \text{ to } 3A V_I = 13.8 \text{ to } 30V$ (note 1)	11.76	12	12.24	V
$\Delta V_O$	Line Regulation	$I_O = 0 \text{ mA } V_I = 13.8 \text{ to } 25V \quad T_J = 25^\circ C$		1	25	mV
		$I_O = 0 \text{ mA } V_I = 13.8 \text{ to } 25V$		2	25	mV
$\Delta V_O$	Load Regulation	$I_O = 0 \text{ to } 3A T_J = 25^\circ C$		12	36	mV
		$I_O = 0 \text{ to } 3A$		24	72	V
$V_d$	Dropout Voltage	$I_O = 3 \text{ A}$		1.3	1.5	V
$I_q$	Quiescent Current	$V_I \leq 30V$		5	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	3.2	4.5		A
		$V_I - V_O = 25V$	0.2	0.5		A
	Thermal Regulation	$T_A = 25^\circ C, 30\text{ms pulse}$		0.008	0.04	%/W
SVR	Supply Voltage Rejection	$f = 120 \text{ Hz}, C_O = 25 \mu F, I_O = 3A$ $V_I = 17 \pm 3V$	54	66		dB
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C \quad f = 10\text{Hz to } 10\text{KHz}$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C 1000\text{Hrs}$		0.5		%



NOTE 1: See short-circuit current curve for available output current at fixed dropout.

**Table 15: Electrical Characteristics Of LD1085# ( $V_I=4.25V$ ,  $C_I = C_O = 10\mu F$ ,  $T_A = -40$  to  $125^\circ C$ , unless otherwise specified.)**


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_O$	Output Voltage	$I_O = 10mA \ T_J = 25^\circ C$	1.237	1.25	1.263	V
		$I_O = 10mA$ to $5AV_I = 2.85$ to $30V$ (note 1)	1.225	1.25	1.275	V
$\Delta V_O$	Line Regulation	$I_O = 10mA \ V_I = 2.85$ to $16.5V \ T_J = 25^\circ C$		0.015	0.2	%
		$I_O = 10mA \ V_I = 2.85$ to $16.5V$		0.035	0.2	%
$\Delta V_O$	Load Regulation	$I_O = 10mA$ to $5A \ T_J = 25^\circ C$		0.1	0.3	%
		$I_O = 0$ to $5A$		0.2	0.4	%
$V_d$	Dropout Voltage	$I_O = 5A$		1.3	1.5	V
$I_{O(min)}$	Minimum Load Current	$V_I = 30V$		3	10	mA
$I_{sc}$	Short Circuit Current	$V_I - V_O = 5V$	5.5	6.5		A
		$V_I - V_O = 25V$	0.5	0.7		A
	Thermal Regulation	$T_A = 25^\circ C$ , 30ms pulse		0.003	0.015	%/W
SVR	Supply Voltage Rejection	$f = 120$ Hz, $C_O = 25 \mu F$ , $C_{ADJ} = 25 \mu F$ , $I_O = 5A \ V_I = 6.25 \pm 3V$	60	72		dB
$I_{ADJ}$	Adjust Pin Current	$V_I = 4.25V \ I_O = 10 mA$		55	120	$\mu A$
$\Delta I_{ADJ}$	Adjust Pin Current Change	$I_O = 10mA$ to $5A \ V_I = 2.85$ to $16.5V$ (note 1)		0.2	5	$\mu A$
eN	RMS Output Noise Voltage (% of $V_O$ )	$T_A = 25^\circ C \ f = 10Hz$ to $10KHz$		0.003		%
S	Temperature Stability			0.5		%
S	Long Term Stability	$T_A = 125^\circ C$ 1000Hrs		0.5		%

NOTE 1: See short-circuit current curve for available output current at fixed dropout.


### TYPICAL CHARACTERISTICS (unless otherwise specified $T_j = 25^\circ C$ , $C_I=C_O=10\mu F$ )

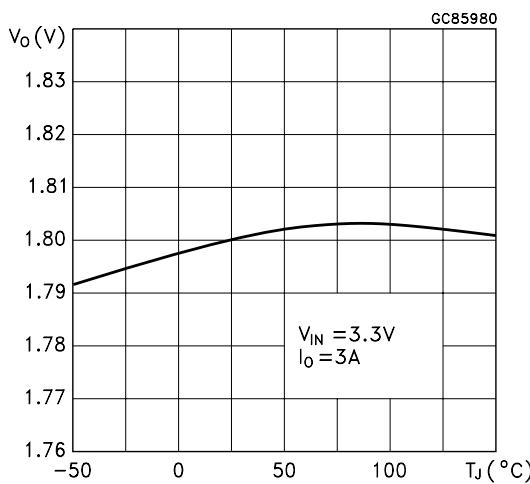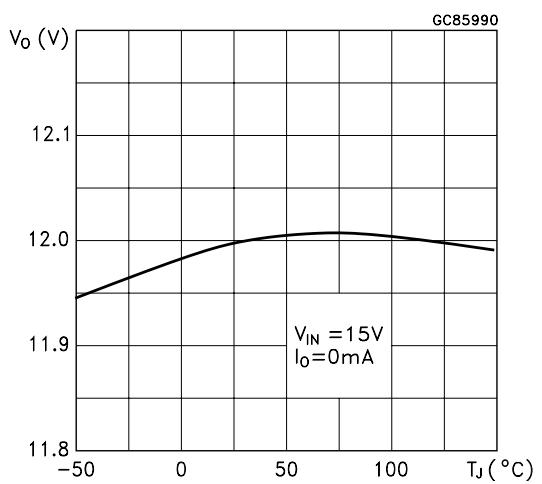**Figure 4: Output Voltage vs Temperature****Figure 5: Output Voltage vs Temperature**


**Figure 6:** Output Voltage vs Temperature

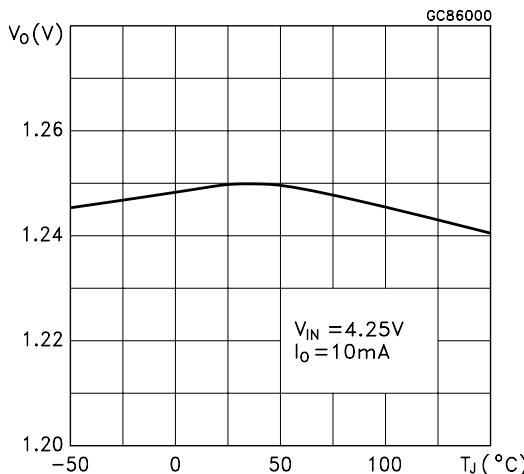


**Figure 9:** Load Regulation vs Temperature

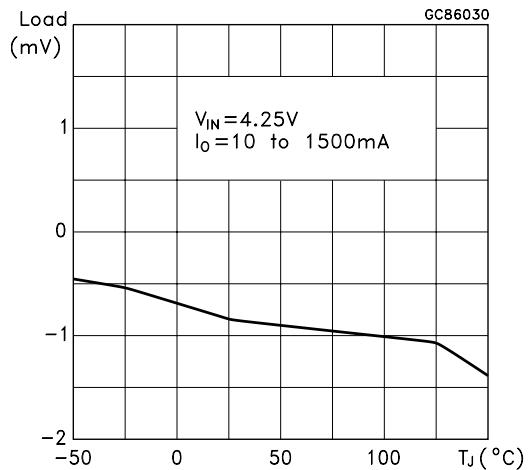


**Figure 7:** Short Circuit Current vs Dropout Voltage

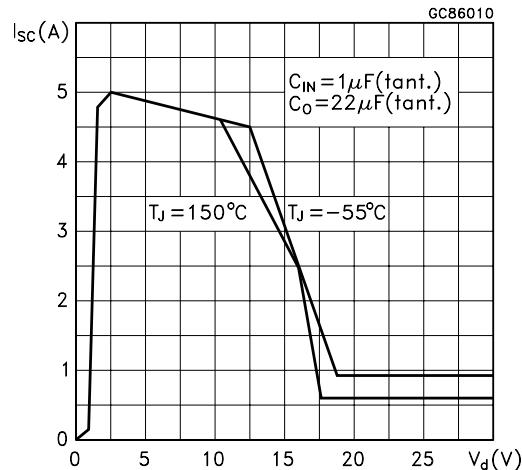


**Figure 10:** Dropout Voltage vs Temperature






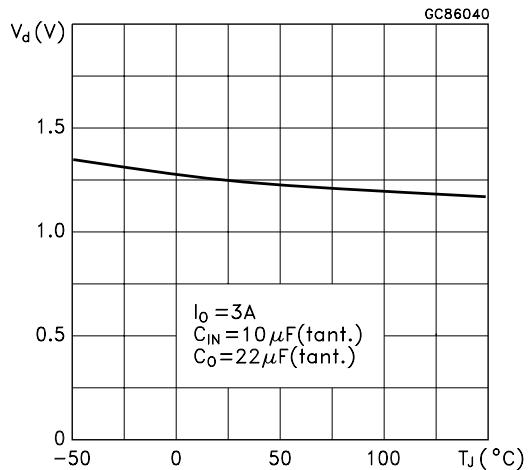


**Figure 8:** Line Regulation vs Temperature

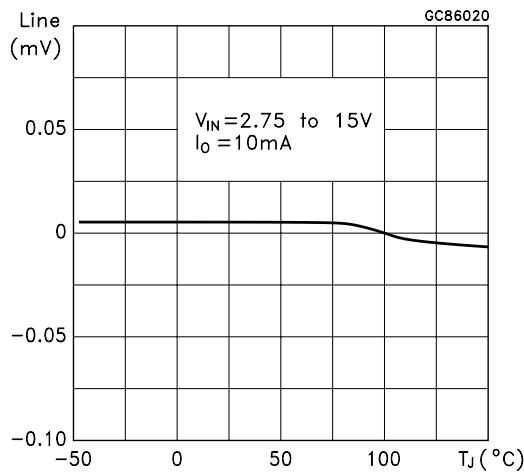


**Figure 11:** Dropout Voltage vs Output Current

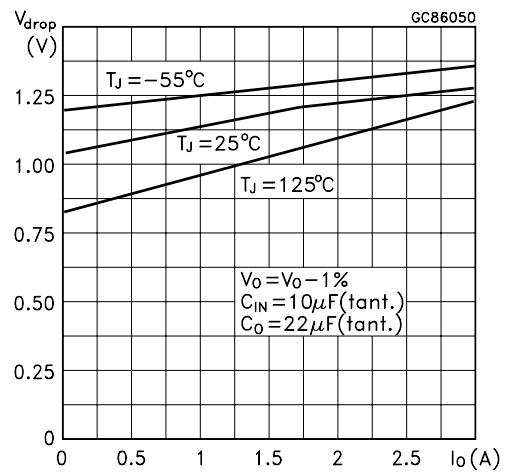


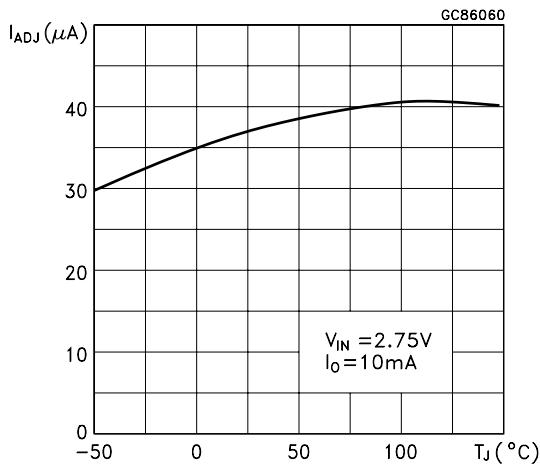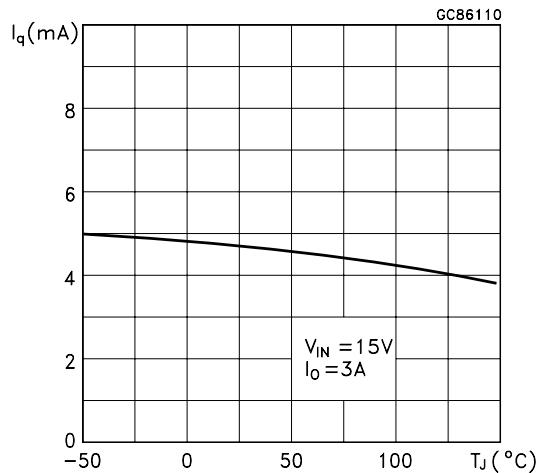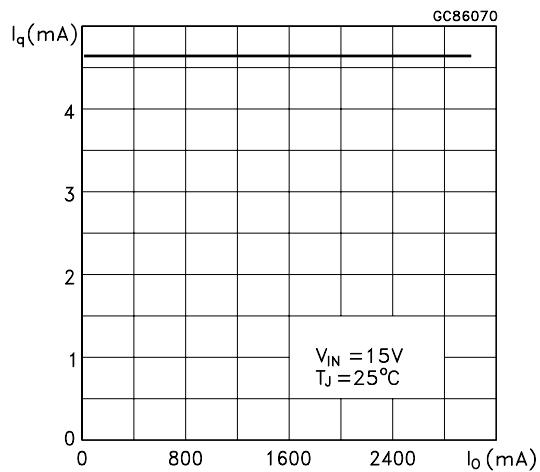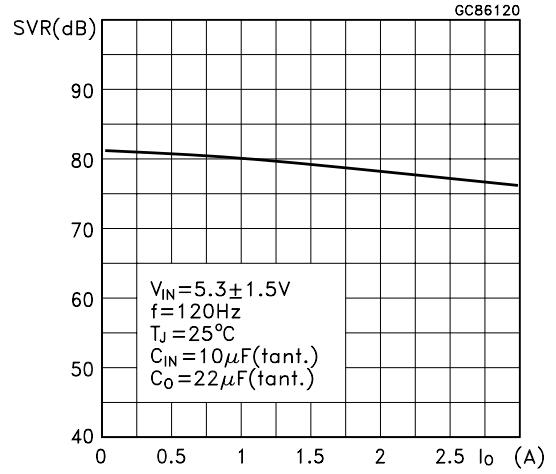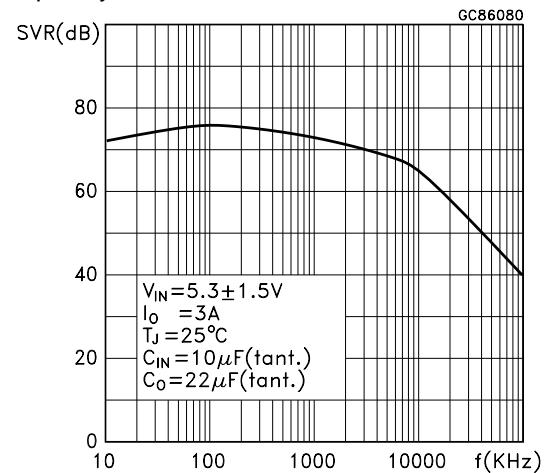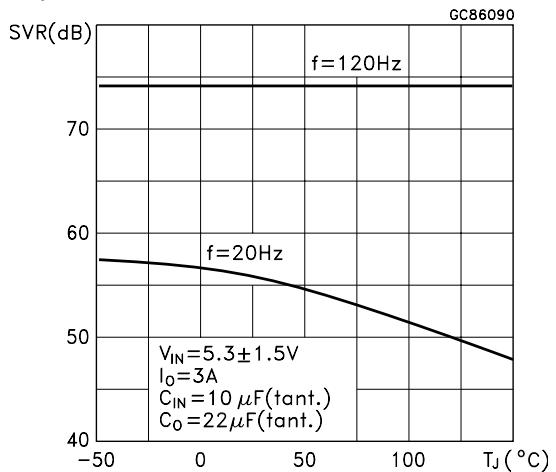**Figure 12:** Adjust Pin Current vs Temperature**Figure 13:** Quiescent Current vs Temperature**Figure 14:** Dropout Voltage vs Output Current**Figure 15:** Supply Voltage Rejection vs Output Current**Figure 16:** Supply Voltage Rejection vs Frequency**Figure 17:** Supply Voltage Rejection vs Temperature


**Figure 18:** Minimum Load Current vs Temperature

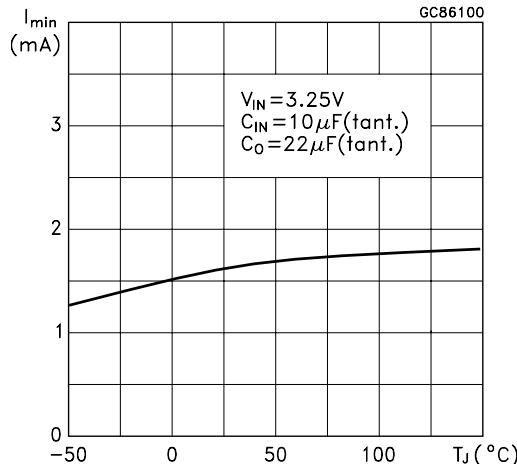


**Figure 19:** Stability

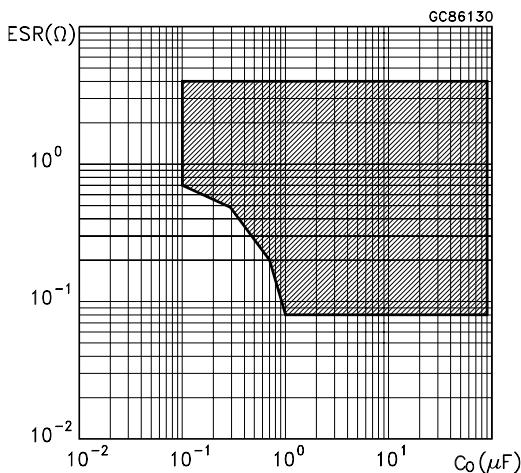


**Figure 20:** Stability

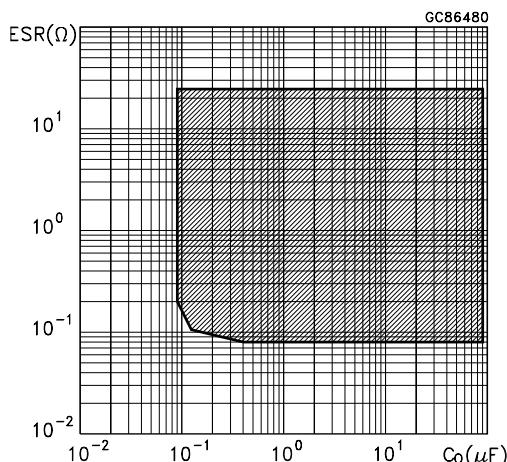


**Figure 21:** Line Transient

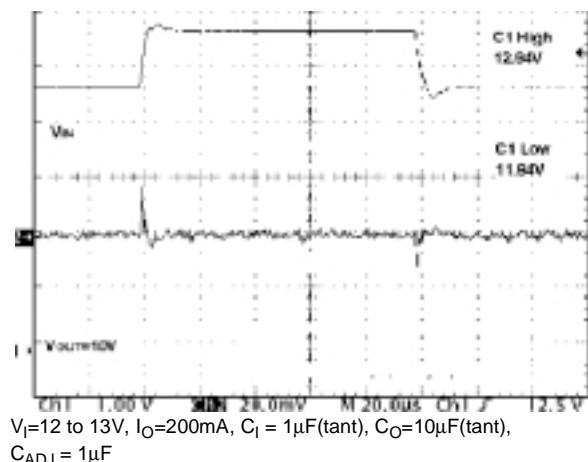


**Figure 22:** Line Transient

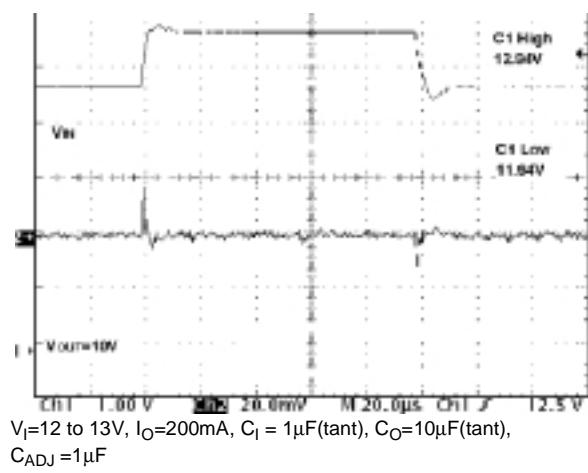

**Figure 23:** Load Transient

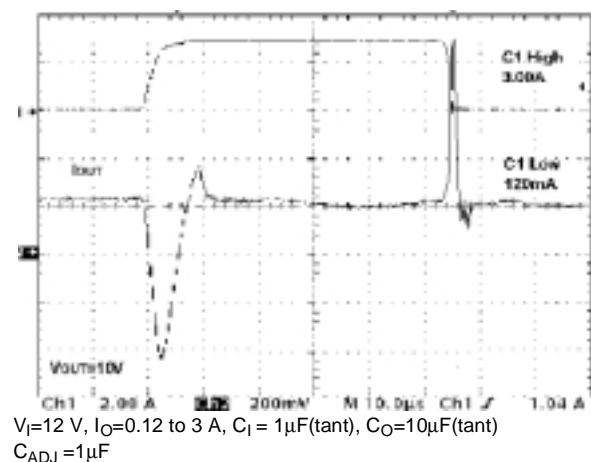

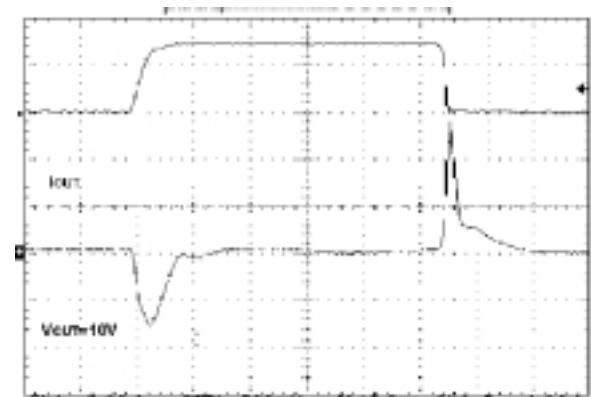
**Figure 24:** Load Transient

$V_I=12\text{ V}$ ,  $I_O=0.12\text{ to }3\text{ A}$ ,  $C_I=1\mu\text{F(tant)}$ ,  $C_O=10\mu\text{F(tant)}$

$C_{ADJ}=1\mu\text{F}$

## TO-220 MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

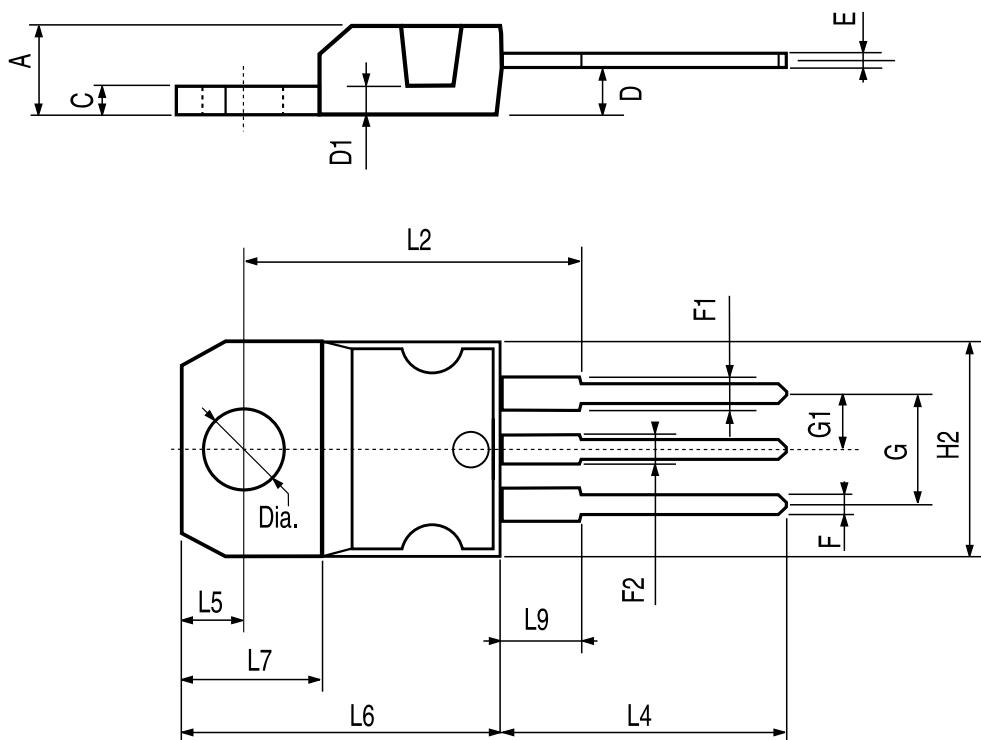

P011C

## TO-220FP MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
B	2.5		2.7	0.098		0.106
D	2.5		2.75	0.098		0.108
E	0.45		0.70	0.017		0.027
F	0.75		1	0.030		0.039
F1	1.15		1.50	0.045		0.059
F2	1.15		1.50	0.045		0.059
G	4.95		5.2	0.194		0.204
G1	2.4		2.7	0.094		0.106
H	10.0		10.40	0.393		0.409
L2		16			0.630	
L3	28.6		30.6	1.126		1.204
L4	9.8		10.6	0.385		0.417
L5	2.9		3.6	0.114		0.142
L6	15.9		16.4	0.626		0.645
L7	9		9.3	0.354		0.366
DIA.	3		3.2	0.118		0.126

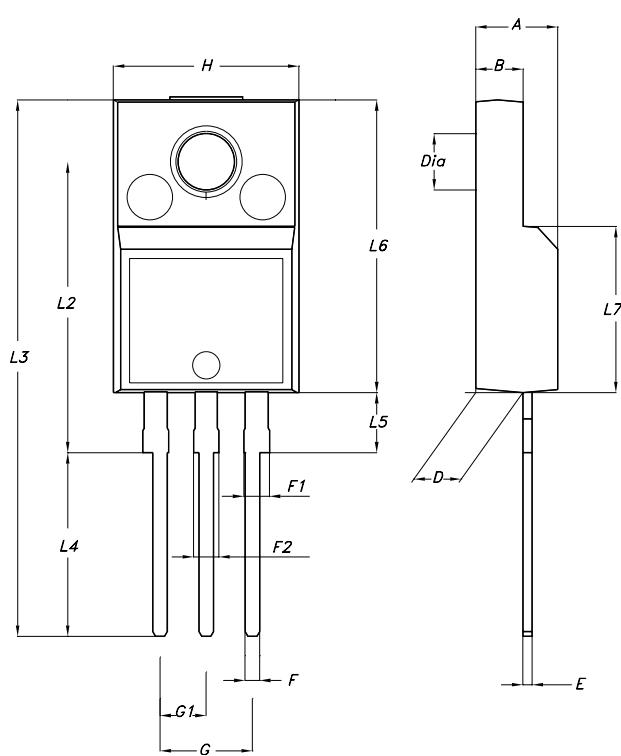

7012510A-H


D<sup>2</sup>PAK MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.7		0.93	0.027		0.036
B2	1.14		1.7	0.044		0.067
C	0.45		0.6	0.017		0.023
C2	1.23		1.36	0.048		0.053
D	8.95		9.35	0.352		0.368
D1		8			0.315	
E	10		10.4	0.393		0.409
E1		8.5			0.335	
G	4.88		5.28	0.192		0.208
L	15		15.85	0.590		0.624
L2	1.27		1.4	0.050		0.055
L3	1.4		1.75	0.055		0.068
M	2.4		3.2	0.094		0.126
R		0.4			0.016	
V2	0°		8°	0°		8°

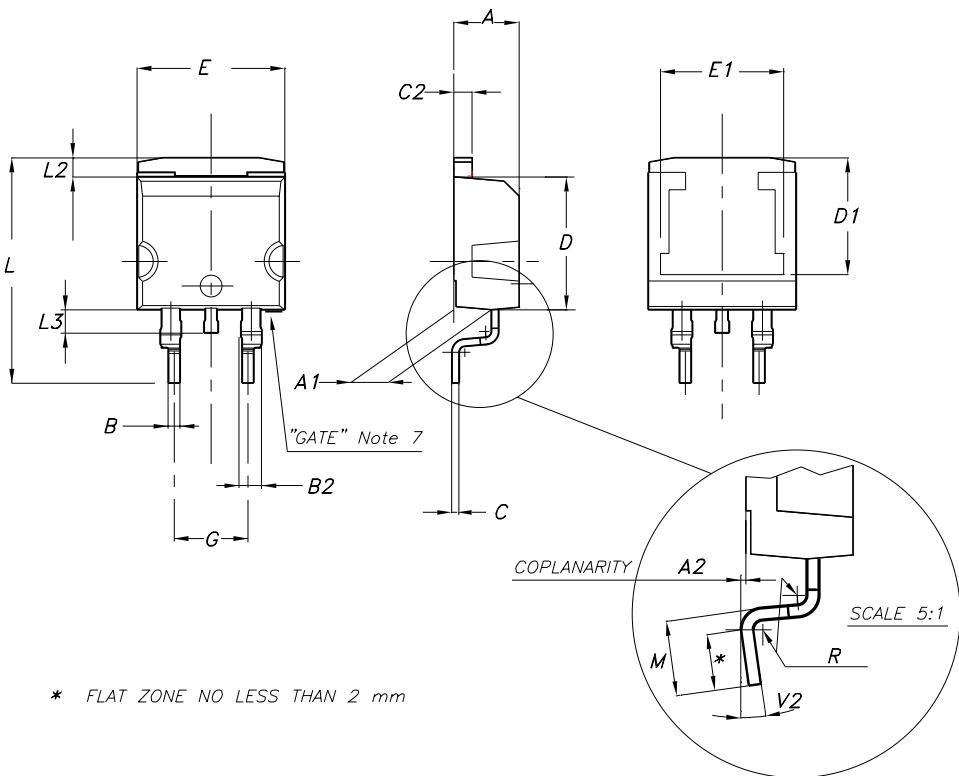

**D<sup>2</sup>PAK/A MECHANICAL DATA**


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.7		0.93	0.028		0.037
B1	0.8		1.3	0.031		0.051
B2	1.14		1.7	0.045		0.067
C	0.45		0.60	0.018		0.024
C2	1.23		1.36	0.048		0.054
D	8.95		9.35	0.352		0.368
D1		8			0.315	
E	10		10.4	0.394		0.409
E1		8.5			0.335	
G	4.88		5.28	0.192		0.208
L	15		15.85	0.591		0.624
L2	1.27		1.4	0.050		0.055
M	2.4		3.2	0.094		0.126
R		0.4			0.016	
V2	0°		8°	0°		8°

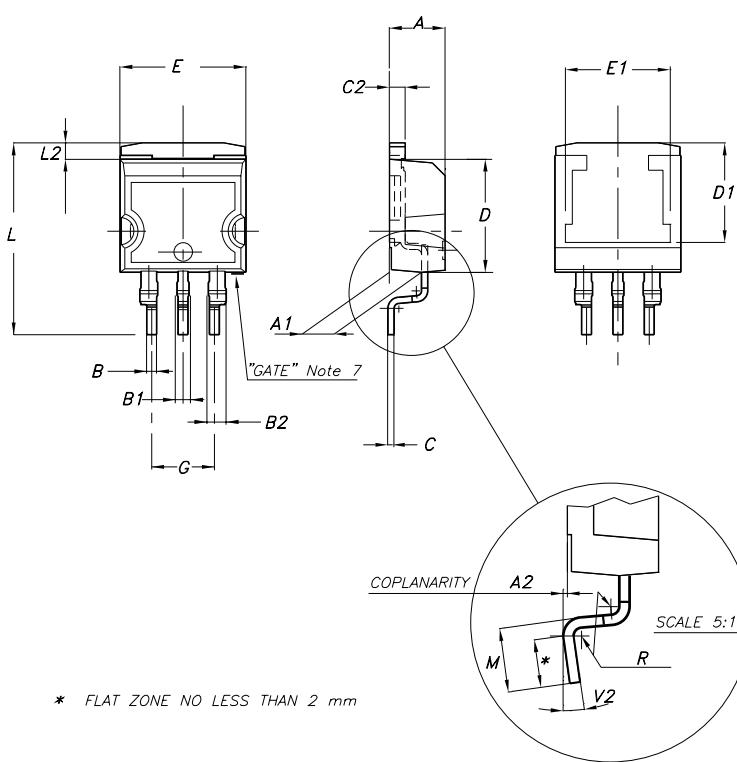

7106164/D

**Tape & Reel D<sup>2</sup>PAK-P<sup>2</sup>PAK-D<sup>2</sup>PAK/A-P<sup>2</sup>PAK/A MECHANICAL DATA**

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			180			7.086
C	12.8	13.0	13.2	0.504	0.512	0.519
D	20.2			0.795		
N	60			2.362		
T			14.4			0.567
A <sub>o</sub>	10.50	10.6	10.70	0.413	0.417	0.421
B <sub>o</sub>	15.70	15.80	15.90	0.618	0.622	0.626
K <sub>o</sub>	4.80	4.90	5.00	0.189	0.193	0.197
P <sub>o</sub>	3.9	4.0	4.1	0.153	0.157	0.161
P	11.9	12.0	12.1	0.468	0.472	0.476

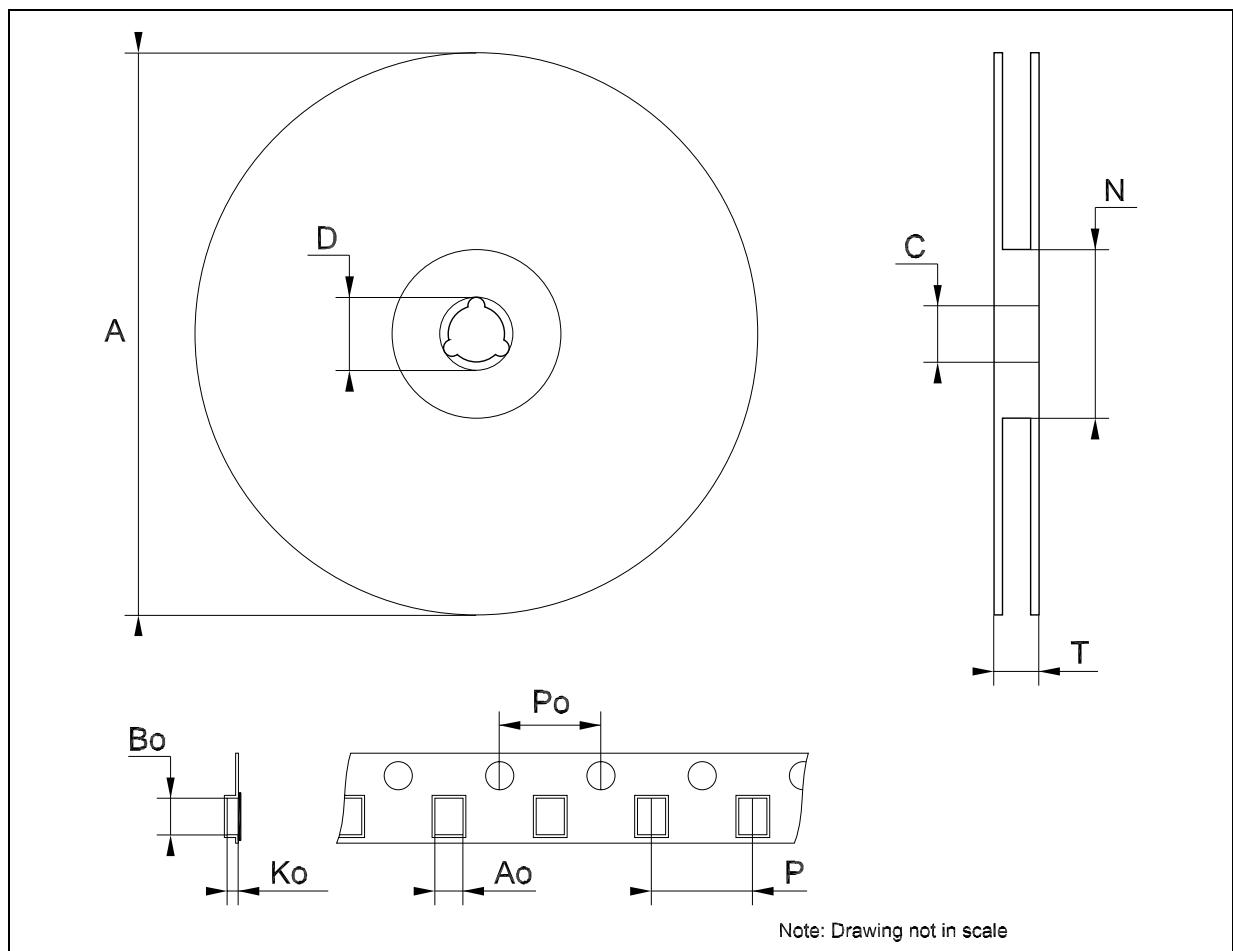

**Table 16: Revision History**

Date	Revision	Description of Changes
07-Oct-2004	12	Mistake Order Codes - Table 1.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)