

### Features

- Input Voltage Range: 2.7V to 5.5V
- Dropout Voltage 400mV at 300mA Output Current
- Guaranteed 300mA Output Current
- Internal  $R_{ON} = 1.5\Omega$  PMOS Draws No Base Current
- Low Quiescent Current 50 $\mu$ A
- Output Voltage: 1.5V/1.8V/2.0V/2.5V/2.8V/3.0V/3.3V/3.5; Accuracy 2%
- Fast Transient Response
- Good Load Regulation
- Current Limit and Thermal Shutdown Protection
- Short Circuit Current Fold-Back
- Lead-Free Packages: SC59, SC59R, SOT89-3L, and SOT89R-3L
- SC59, SC59R and SOT23: Available in "Green" Molding Compound (No Br, Sb) (Note 1)
- Lead Free Finish/RoHS Compliant (Note 2)


### General Description

The AP130 is a 300mA, fixed output voltage, low dropout linear regulator. The device includes pass element, error amplifier, band-gap, current-limit and thermal shutdown circuitry. The characteristics of low dropout voltage and less quiescent current make it good for some critical current application, for example, some battery powered devices. The typical quiescent current is approximately 50 $\mu$ A from zero to maximum load. Due to internal flexible design, results in extensively fixed output voltage versions and make it convenient to use for applications. Built-in current-limit and thermal-shutdown functions prevent any fault condition from IC damage.

### Applications

- Battery Powered Device
- CD-ROM, DVD, and LAN Card
- PC Peripheral
- Wireless Communication

### Ordering Information





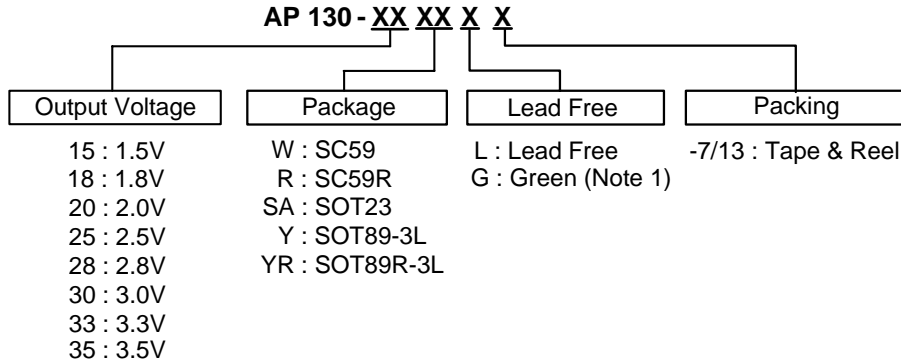


- Note: 1. SOT23 is available in "Green" product only.  
 2. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.


Device	Package Code	Packaging (Note 3)	7"/13" Tape and Reel	
			Quantity	Part Number Suffix
AP130-XXW	W	SC59	3000/Tape & Reel	-7
AP130-XXR	R	SC59R	3000/Tape & Reel	-7
AP130-XXSA	SA	SOT23	3000/Tape & Reel	-7
AP130-XXY	Y	SOT89-3L	2500/Tape & Reel	-13
AP130-XXYR	YR	SOT89R-3L	2500/Tape & Reel	-13

- Note: 3. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

**Pin Assignments**

Package		No.	Name	Description
Type	Code			
(Top View)  (SC59)	W	1	IN	IN: Power Input OUT: Output Voltage GND: Ground
		2	OUT	
		3	GND	
(Top View)  (SC59R)	R	1	GND	
		2	OUT	
		3	IN	
(Top View)  (SOT23)	SA	1	IN	
		2	OUT	
		3	GND	
(Top View)  (SOT89-3L)	Y	1	OUT	
		2	GND	
		3	IN	
(Top View)  (SOT89R-3L)	YR	1	GND	
		2	IN	
		3	OUT	

**Block Diagram**

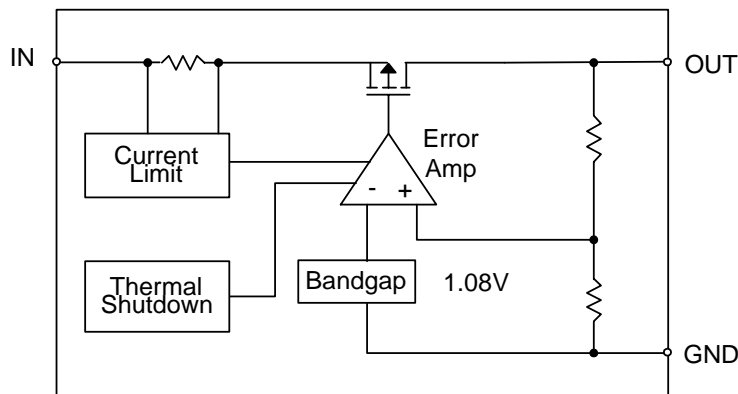

**Absolute Maximum Ratings**

Symbol	Parameter	Rating	Unit
$V_{CC}$	Input Voltage	+6	V
$T_{OP}$	Operating Junction Temperature	-40 to +125	°C
$T_{ST}$	Storage Temperature Range	-65 to +150	°C

**Recommended Operating Conditions**

Symbol	Parameter	Min	Max	Unit
$V_{IN}$	Input Voltage	2.7	5.5	V
$I_{OUT}$	Output Current	0	300	mA
$T_A$	Operating Ambient Temperature	-40	85	°C





### Electrical Characteristics

$T_A = 25^\circ\text{C}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{OUT} = 10\mu\text{F}$ , unless otherwise specified.


Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
$V_{DROP}$	Dropout Voltage (Note 4)	$I_L = 300\text{mA}$	-	400	500	mV
$I_{LIMIT}$	Current Limit (Note 5)	$V_{IN} = 5\text{V}$ , $V_{OUT} = 0\text{V}$	350	450	-	mA
$I_{short}$	Short Circuit Current	$V_{OUT} < 1.05\text{V}$	-	150	300	mA
$\Delta V_{LINE}$	Line Regulation	$I_{OUT} = 1\text{mA}$ , $V_{IN} = (V_{OUT} + 1\text{V})$ to 5.5V	-	0.1	0.3	%/V
PSRR	Ripple Rejection	$F = 100\text{Hz}$ , $C_{IN} = 1\mu\text{F}$ , $C_{O} = 10\mu\text{F}$ , $I_L = 100\text{mA}$	-	58	-	dB
$\Delta V_{LOAD}$	Load Regulation (Note 6)	$I_L = 1\sim 300\text{mA}$ , $V_{IN} = 5\text{V}$	-	30	40	mV
$\Delta V_{OUT}$	Output Voltage Accuracy	$I_L = 1\text{mA}$ , $V_{IN} = 5\text{V}$	-2	-	+2	%
	Output Voltage Temperature Coefficient (Note 7)		-	50	150	PPM/ $^\circ\text{C}$
$I_Q$	Quiescent Current	$I_L = 0\text{mA}$ , $V_{IN} = 5\text{V}$	-	50	100	$\mu\text{A}$
$\theta_{JA}$	Thermal Resistance Junction-to-Ambient	SC59/SC59R (Note 8)	-	250	-	$^\circ\text{C/W}$
		SOT23 (Note 9)	-	200	-	
		SOT89-3L/SOT89R-3L (Note 10)	-	100	-	
$\theta_{JC}$	Thermal Resistance Junction-to-Case	SC59/SC59R (Note 8)	-	79	-	$^\circ\text{C/W}$
		SOT23 (Note 9)	-	43	-	
		SOT89-3L/SOT89R-3L (Note 10)	-	23	-	

- Note:
4. Dropout voltage is defined as the input to output differential voltage. Dropout is measured at constant junction temperature by using pulsed ON time, and the criterion is  $V_{OUT}$  inside target value  $\pm 2\%$ . This test is skipped at the condition of  $V_{IN} < 3\text{V}$ .
  5. Current limit is measured at constant junction temperature by using pulsed testing with a low ON time.
  6. Regulation is measured at constant junction temperature by using pulsed testing with a low ON time.
  7. Guaranteed by design.
  8. Test condition for SC59R: Devices mounted on FR-4 PC board, 1"MRP, 2oz copper, single sided, calibrate at  $T_J = 125^\circ\text{C}$ ,  $T_A = 25^\circ\text{C}$ , with minimum recommended pad layout.
  9. Test condition for SOT23: Devices mounted on FR-4 PC board, 1"MRP, calibrate at  $T_J = 85^\circ\text{C}$ ,  $T_A = 29^\circ\text{C}$ .
  10. Test condition for SOT89-3L/SOT89R-3L: No Heat Sink, no air flow.

**Typical Characteristics**

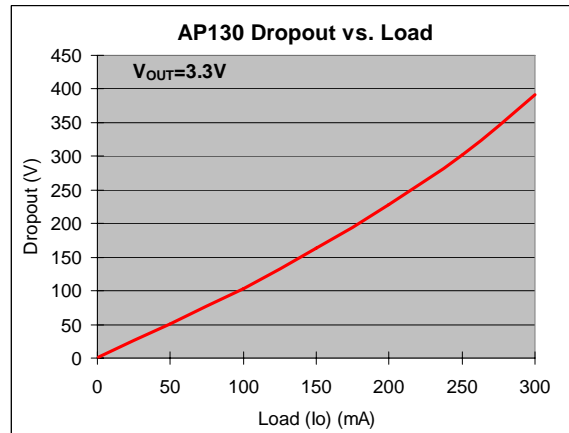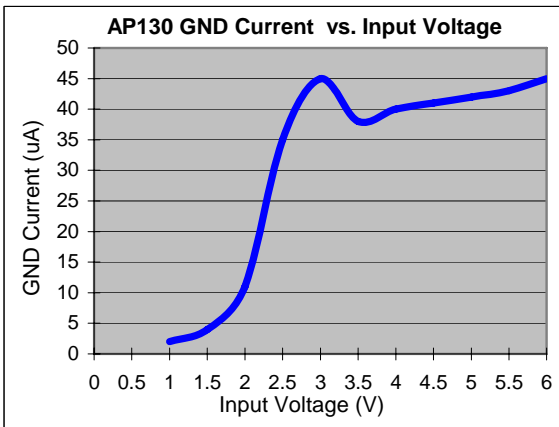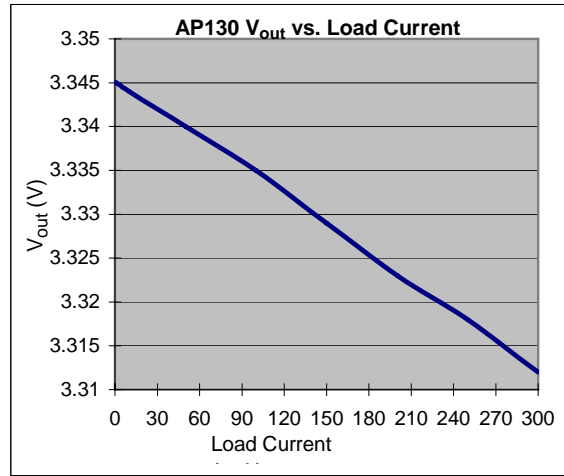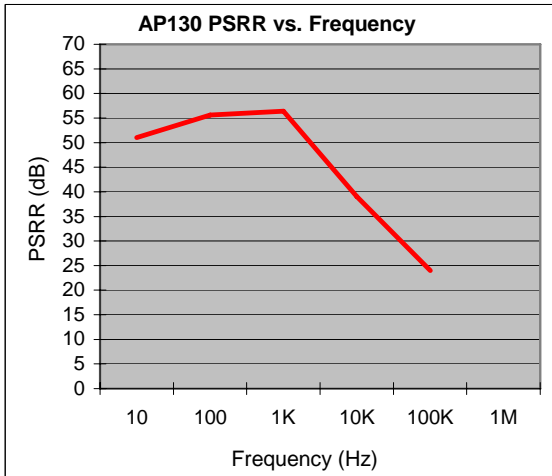

**Typical Application Circuit**

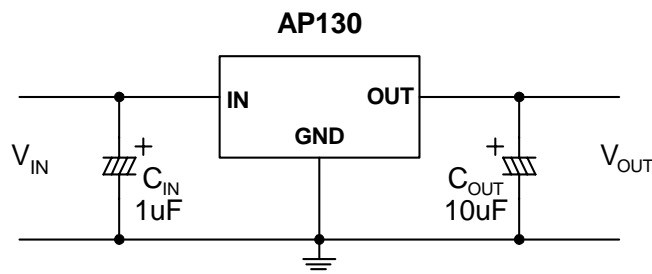


## Function Description

A minimum of 10µF capacitor must be connected from OUT to ground to insure stability. Typically a large storage capacitor is connected from V<sub>IN</sub> to ground to ensure that the input voltage does not sag below the minimum dropout voltage during the load transient response.

## Marking Information

### (1) SC59, SC59R and SOT23

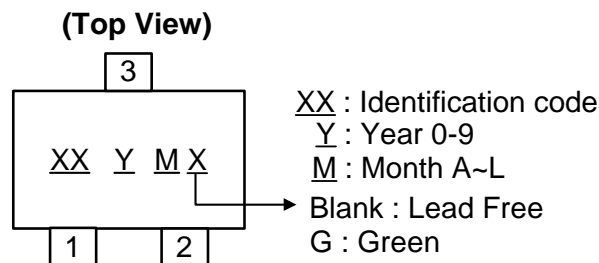


Device	Package (Note 11)	Identification Code	Date Code
AP130-15W	SC59W	CA	YM
AP130-18W	SC59W	CD	YM
AP130-20W	SC59W	CF	YM
AP130-25W	SC59W	CK	YM
AP130-28W	SC59W	CN	YM
AP130-30W	SC59W	CP	YM
AP130-33W	SC59W	CS	YM
AP130-35W	SC59W	CU	YM
AP130-15R	SC59R	GO	YM
AP130-18R	SC59R	GR	YM
AP130-20R	SC59R	GT	YM
AP130-25R	SC59R	GY	YM
AP130-28R	SC59R	H1	YM
AP130-30R	SC59R	H3	YM
AP130-33R	SC59R	H9	YM
AP130-35R	SC59R	HB	YM
AP130-15SA	SOT23	U2	YM
AP130-18SA	SOT23	U3	YM
AP130-20SA	SOT23	U4	YM
AP130-25SA	SOT23	U5	YM
AP130-28SA	SOT23	U6	YM
AP130-30SA	SOT23	U7	YM
AP130-33SA	SOT23	U8	YM
AP130-35SA	SOT23	U9	YM

**Marking Information (Continued)**

(2) SOT89-3L/SOT89R-3L

( Top View )

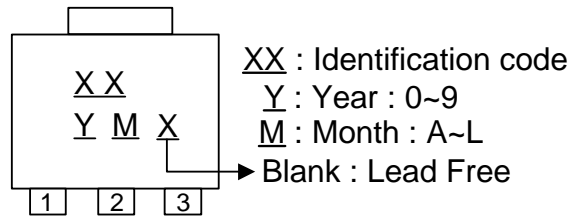


Device	Package (Note 11)	Identification Code	Date Code
AP130-15Y	SOT89-3L	CA	YM
AP130-18Y	SOT89-3L	CD	YM
AP130-20Y	SOT89-3L	CF	YM
AP130-25Y	SOT89-3L	CK	YM
AP130-28Y	SOT89-3L	CN	YM
AP130-30Y	SOT89-3L	CP	YM
AP130-33Y	SOT89-3L	CS	YM
AP130-35Y	SOT89-3L	CU	YM
AP130-15YR	SOT89R-3L	GO	YM
AP130-18YR	SOT89R-3L	GR	YM
AP130-20YR	SOT89R-3L	GT	YM
AP130-25YR	SOT89R-3L	GY	YM
AP130-28YR	SOT89R-3L	H1	YM
AP130-30YR	SOT89R-3L	H3	YM
AP130-33YR	SOT89R-3L	H9	YM
AP130-35YR	SOT89R-3L	HB	YM


Note: 11. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

**Package Information** (All Dimensions in mm)

(1) Package Type: SC59 and SC59R

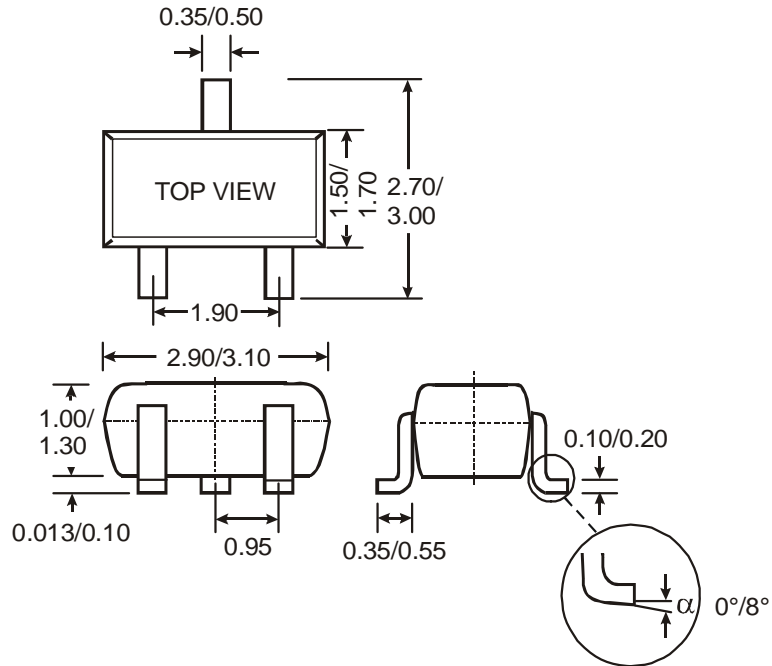


(2) Package Type: SOT23

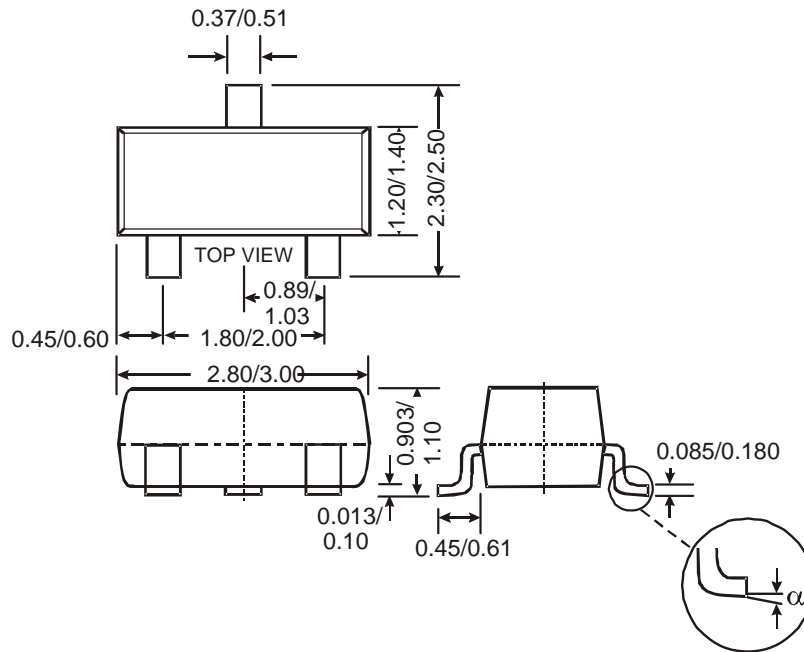



**Package Information (Continued)**

**(3) Package Type: SOT89-3L/SOT89R-3L**

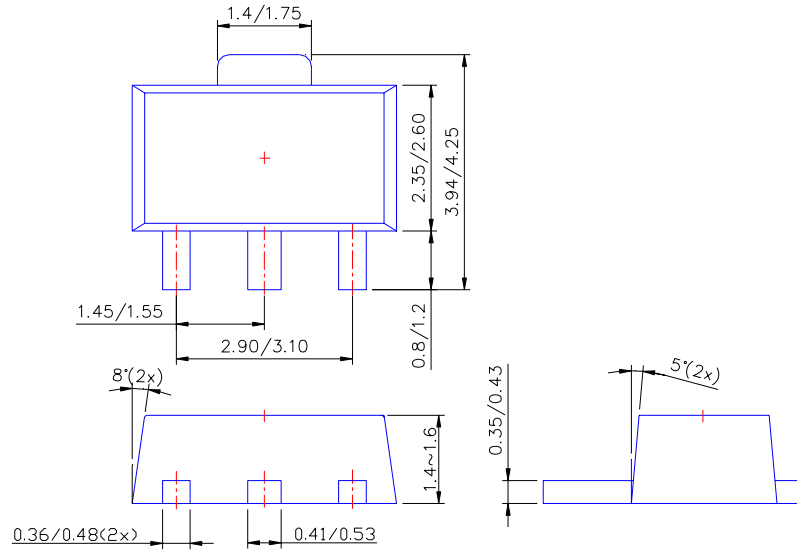

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.