

## EMG 75-NZG/G24/2

Order No.: 2942454



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2942454>

Voltage regulator module, secondary switched-mode, default, input  
24.5 V-29 V AC/ 27 V-30 V DC, output 24 V DC/2 A

### Commercial data

EAN	4017918080747
Pack	1 Pcs.
Customs tariff	85044081
Weight/Piece	0.282 KG

### Product notes

WEEE/RoHS-compliant since:  
04/01/2007



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

### Technical data

#### Input data

Nominal input voltage	24.5 V AC ... 29 V AC
AC frequency range	50 Hz ... 60 Hz
Nominal power consumption	Approx. 60 VA
Input fuse	4 A (slow-blow TR 5, internal, solderable)

#### Output data

Nominal output voltage	24 V DC $\pm 2$ % (settable from 5.1 V DC ... 24.5 V DC)
Output current	2 A
Residual ripple	$\leq 400$ mV <sub>pp</sub>
Name of protection	Electronic current limitation at 2.8 A
Protective circuit/component	Varistor

#### General data

Width	75 mm
Height	70.5 mm
Depth	75 mm
Weight	320 g
Operating voltage display	LED green
Operating mode	100% operating factor
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C
Mounting position	On horizontal DIN rail
Assembly instructions	Can be aligned with spacing = 5 mm

#### Connection data, input

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Screw thread	M 3

#### Connection data, output

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>

Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm

**Certificates / Approvals**

Approval logo



**requested approbations**

Certification	CUL, GOST, UL
---------------	---------------

**Accessories**


Item	Designation	Description
------	-------------	-------------

**Marking**


2947035	EMG-GKS 12	Equipment marker, width 12 mm
---------	------------	-------------------------------

**Drawings**

Diagram

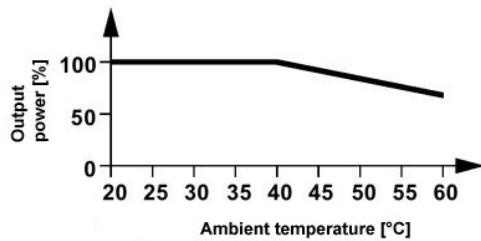

Circuit diagram

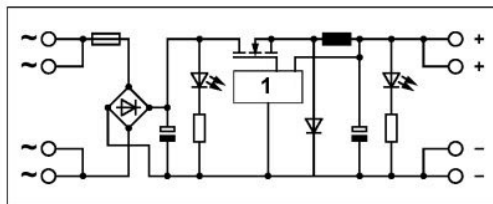

1 = switched-mode regulator

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;