

NEC

**1 Mbps, OPEN-COLLECTOR
OUTPUT FOR GATE DRIVE INTERFACE
INTELLIGENT POWER MODULE
5-PIN SOP PHOTOCOUPLED**

PS9713**FEATURES**

- HIGH INSTANTANEOUS COMMON MODE REJECTION VOLTAGE**
 $CMH, CML = \pm 15 \text{ kV}/\mu\text{s}$ MIN
- HIGH SPEED RESPONSE**
 $t_{PHL} = 500 \text{ ns}$ MAX, $t_{PLH} = 750 \text{ ns}$ MAX
- MAXIMUM PROPAGATION DELAYS**
 $t_{PLH} - t_{PHL} = 270 \text{ ns}$ TYP
- PULSE WIDTH DISTORTION**
 $|t_{PHL} - t_{PLH}| = 270 \text{ ns}$ TYP
- SMALL THIN PACKAGE**
5-pin SOP
- TAPING PRODUCT NUMBER**
PS9713-F3, F4: 3,500 pcs/reel

DESCRIPTION

PS9713 is an optically coupled isolator containing a GaAlAs LED on the input side and a photo diode and a signal processing circuit on the output side on one chip.

APPLICATIONS

- IPM DRIVER**
- GENERAL PURPOSE INVERTER**

ELECTRICAL CHARACTERISTICS¹ ($TA = -40$ to $+100^\circ\text{C}$, $Vcc = 15 \text{ V}$ unless otherwise specified)

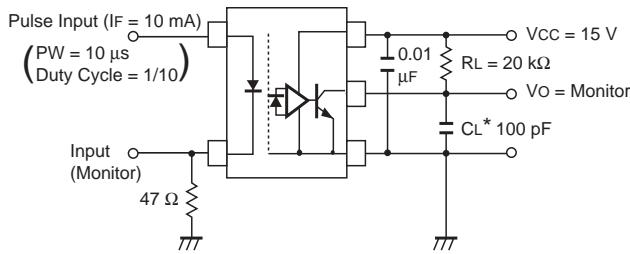
		PART NUMBER	PS9713			
SYMBOL		PARAMETERS	UNITS	MIN	TYP	MAX
Diode	V_F	Forward Voltage, $IF = 10 \text{ mA}$	V	1.3	1.65	2.1
	I_R	Reverse Current, $VR = 3 \text{ V}$	μA			200
	C_t	Terminal Capacitance, $V = 0 \text{ V}$, $f = 1 \text{ MHz}$, $TA = 25^\circ\text{C}$	pF		30	
Detector	V_{OL}	Low Level Output Voltage $IF = 10 \text{ mA}$, $Vcc = 5 \text{ V}$, $Io = 2.4 \text{ mA}$	V		0.13	0.6
	I_{OH}	High Level Output Current $Vcc = 30 \text{ V}$, $V_F = 0.8 \text{ V}$	μA		1.0	50
	I_{CH}	High Level Supply Current, $Vcc = 30 \text{ V}$, $V_F = 0.8 \text{ V}$, $V_o = \text{open}$	mA		0.6	1.3
	I_{CL}	Low Level Supply Current, $Vcc = 30 \text{ V}$, $IF = 10 \text{ mA}$, $V_o = \text{open}$	mA		0.6	1.3
Coupled	I_{FH}	Threshold Input Current (High \rightarrow Low), $V_o = 0.8 \text{ V}$, $Io = 0.75 \text{ mA}$	mA		1.5	5.0
	CTR	Current Transfer Ratio, $IF = 10 \text{ mA}$, $V_o = 0.6 \text{ V}$	%	44	110	
	R_{i-o}	Isolation Resistance, $V_{i-o} = 1 \text{ kV}_{dc}$, $RH = 40$ to 60% , $TA = 25^\circ\text{C}$	Ω	10^{11}		
	C_{i-o}	Isolation Capacitance, $V = 0$, $f = 1 \text{ MHz}$, $TA = 25^\circ\text{C}$	pF		0.6	
	t_{PHL}	Propagation Delay Time ² , High \rightarrow Low $IF = 10 \text{ mA}$, $RL = 20 \text{ k}\Omega$, $CL = 100 \text{ pF}$, $V_{THHL} = 1.5 \text{ V}$, $V_{THLH} = 2.0 \text{ V}$	ns		250	500
	t_{PLH}	Propagation Delay Time ² , High \rightarrow Low $IF = 10 \text{ mA}$, $RL = 20 \text{ k}\Omega$, $CL = 100 \text{ pF}$, $V_{THHL} = 1.5 \text{ V}$, $V_{THLH} = 2.0 \text{ V}$	ns		520	750
	$t_{PLH-tPHL}$	Maximum Propagation Delays $IF = 10 \text{ mA}$, $RL = 20 \text{ k}\Omega$, $CL = 100 \text{ pF}$, $V_{THHL} = 1.5 \text{ V}$, $V_{THLH} = 2.0 \text{ V}$	ns	-200	270	650
	$ t_{PLH-tPHL} $	Pulse Width Distortion (PWD) ² $IF = 10 \text{ mA}$, $RL = 20 \text{ k}\Omega$, $CL = 100 \text{ pF}$, $V_{THHL} = 1.5 \text{ V}$, $V_{THLH} = 2.0 \text{ V}$	ns		270	650
	CM_H	Instantaneous Common Mode Rejection Voltage (Output:High) ³ $TA = 25^\circ\text{C}$, $IF = 0 \text{ mA}$, $V_o > = 3.0 \text{ V}$, $V_{CM} = 1.5 \text{ kV}$, $RL = 20 \text{ k}\Omega$, $CL = 100 \text{ pF}$	$\text{kV}/\mu\text{s}$	15		
	CM_L	Instantaneous Common Mode Rejection Voltage (Output:High) ³ $TA = 25^\circ\text{C}$, $IF = 10 \text{ mA}$, $V_o < = 1.0 \text{ V}$, $V_{CM} = 1.5 \text{ kV}$, $RL = 20 \text{ k}\Omega$, $CL = 100 \text{ pF}$	$\text{kV}/\mu\text{s}$	15		

Notes: See Next Page

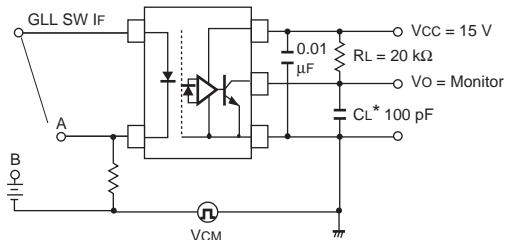
California Eastern Laboratories

Notes:

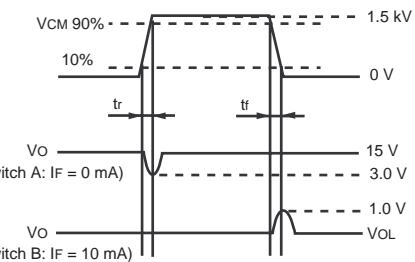
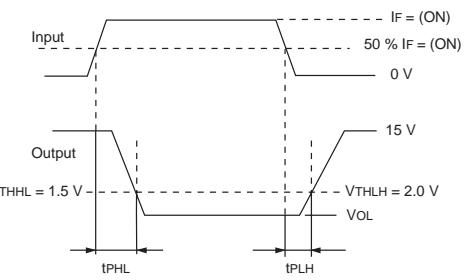
1. Typical values at $T_A = 25^\circ\text{C}$.
2. Test Circuit for Propagation delay time



3. Test circuit for common mode transient immunity

**USAGE CAUTION**

Bypass capacitor of more than $0.1 \mu\text{F}$ is used between Vcc and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.

**ABSOLUTE MAXIMUM RATINGS¹ ($T_A = 25^\circ\text{C}$)**

SYMBOLS	PARAMETERS	UNITS	RATINGS
Diode			
IF	Forward Current	mA	25
VR	Reverse Voltage	V	3.0
Detector			
Vcc	Supply Voltage	V	-0.5 to +35
Vo	Output Voltage	V	-0.5 to +35
Io	Output Current	mA	15
Pc	Power Dissipation	mW	100
Coupler			
BV	Isolation Voltage ²	V _{r.m.s.}	2500
TA	Operating Ambient Temp.	°C	-40 to +100
TSTG	Storage Temperature	°C	-55 to +125

Notes:

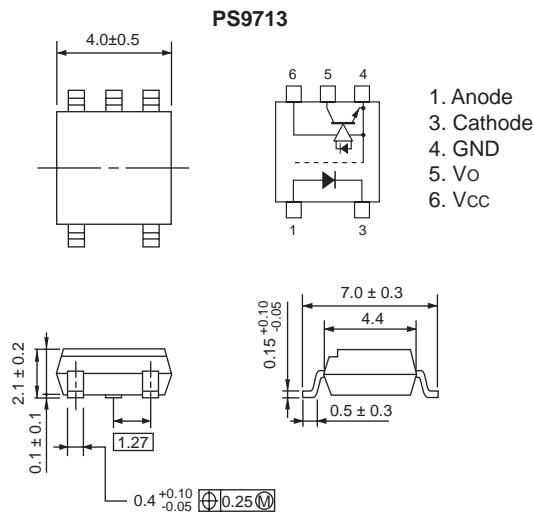
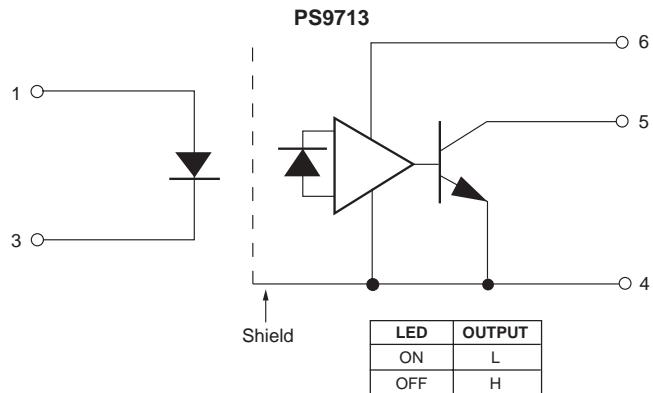
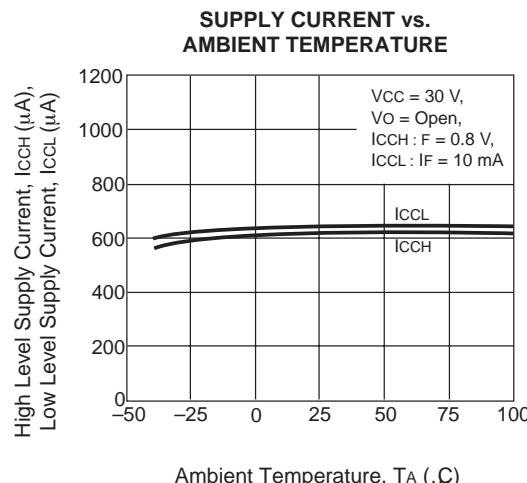
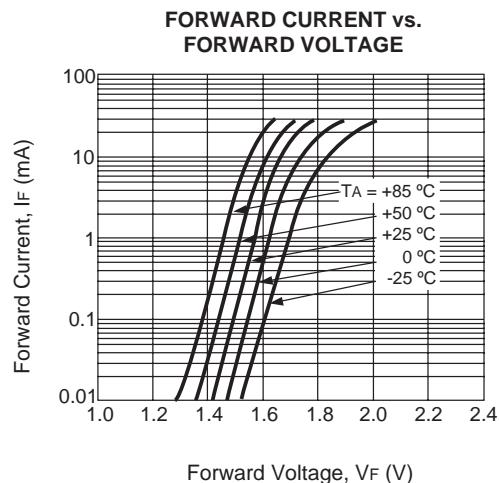
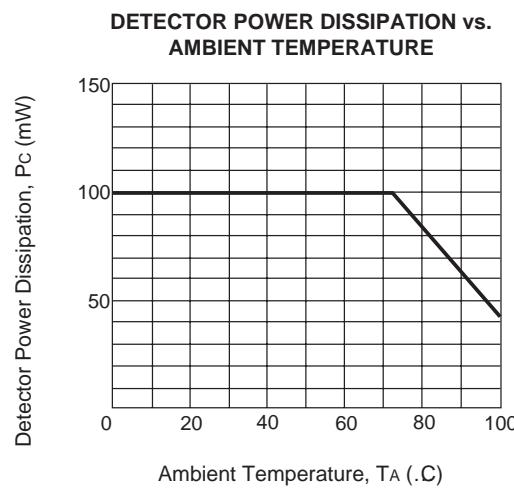
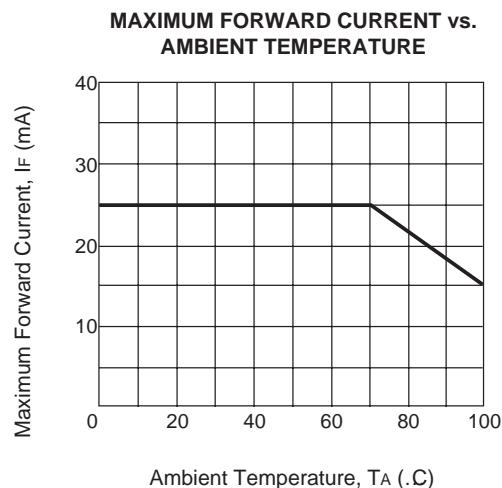
1. Operation in excess of any one of these parameters may result in permanent damage.
2. AC voltage for 1 minute at $T_A = 25^\circ\text{C}$, RH = 60% between input and output.

RECOMMENDED OPERATING CONDITIONS

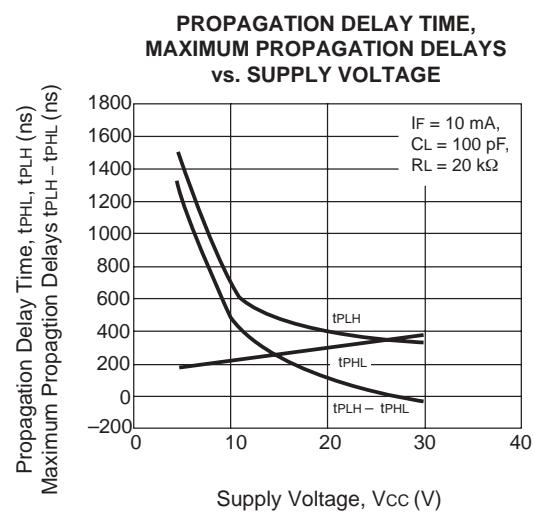
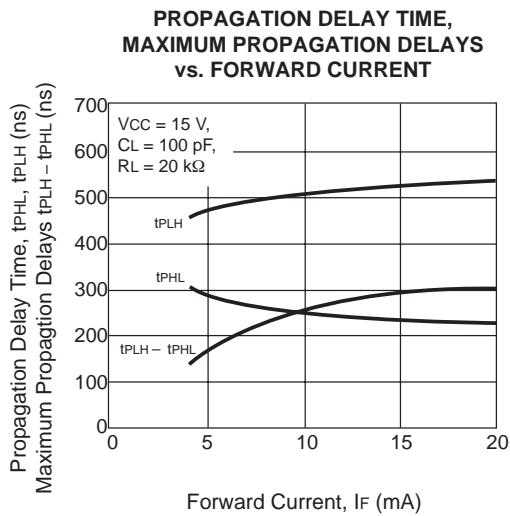
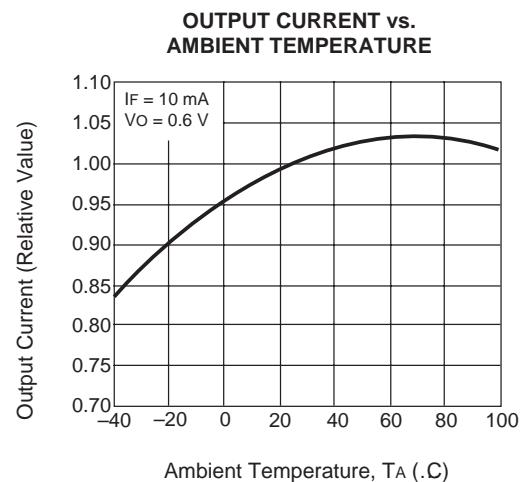
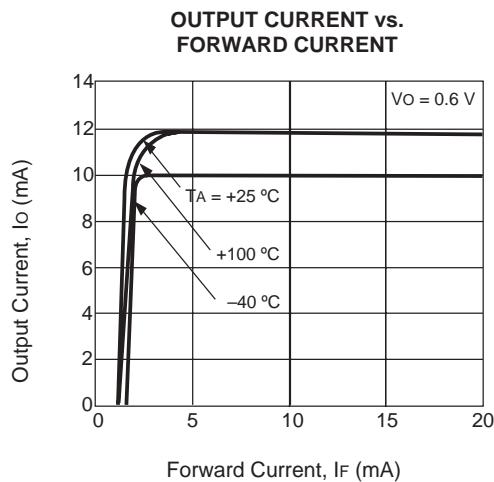
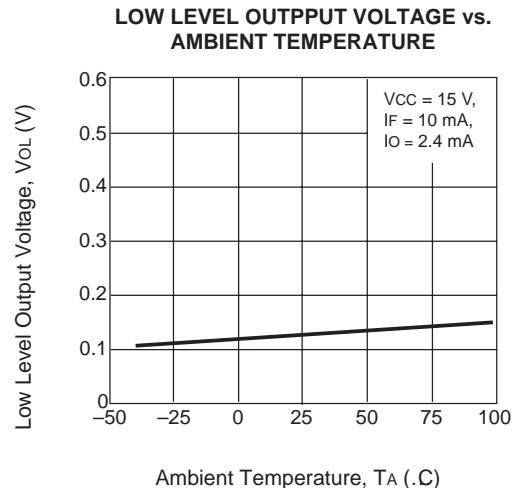
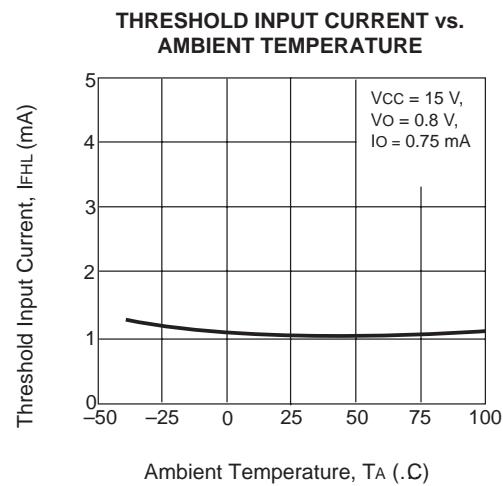
PART NUMBER		PS9713			
SYMBOLS	PARAMETERS	UNITS	MIN	TYP	MAX
I _{IFH}	High Level Input Current	mA	10		20
V _o	Output Voltage	V	0		30
V _{cc}	Supply Voltage	V	4.5		30
V _F	LED off Voltage	V	0		0.8

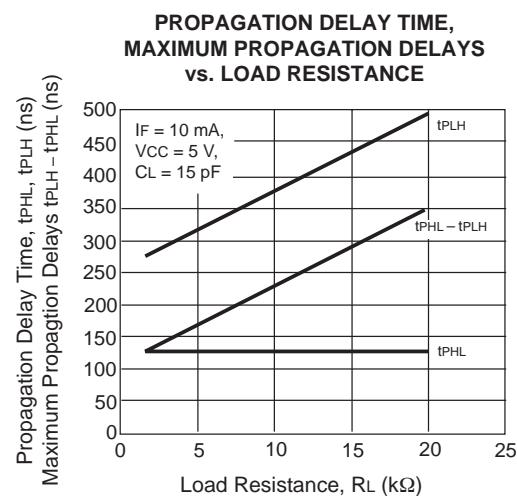
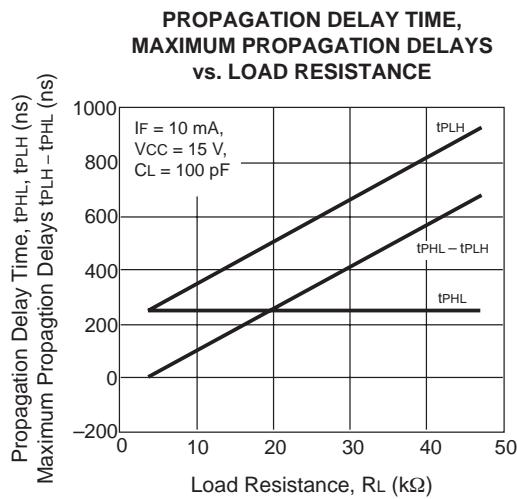
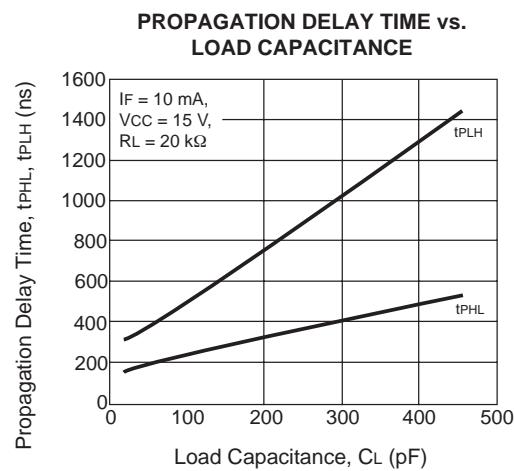
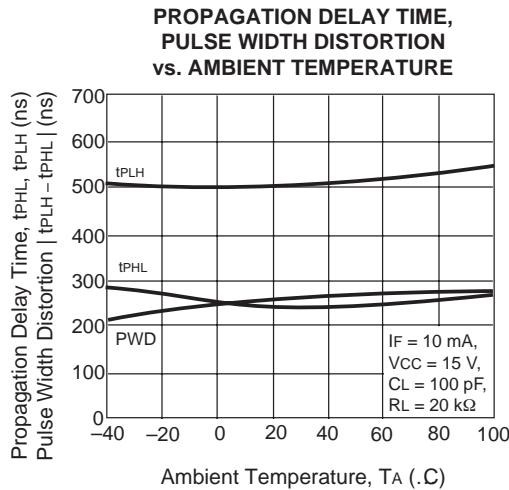
ORDERING INFORMATION

PART NUMBER	PACKAGE	PACKING STYLE
PS9713	5-pin SOP	Magazine case 100 pcs
PS9713-F3		Embossed Tape 3500 pcs/reel
PS9713-F4		
PS9713-V		Magazine case 100 pcs
PS9713-V-F3		Embossed Tape 3500 pcs/reel

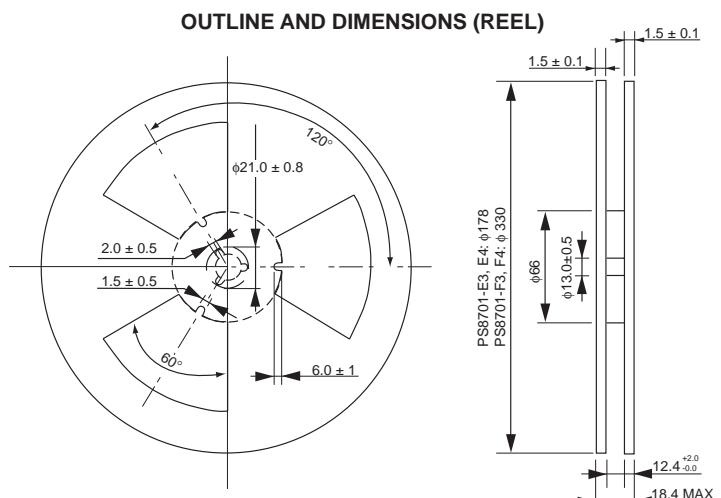
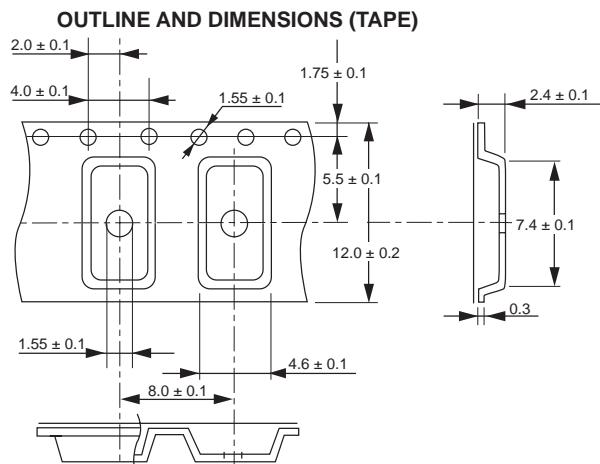
OUTLINE DIMENSIONS (Units in mm)**FUNCTIONAL DIAGRAM****TYPICAL PERFORMANCE CURVES** ($T_A = 25^\circ\text{C}$, unless otherwise specified)

TYPICAL PERFORMANCE CURVES (TA = 25°C, unless otherwise specified)



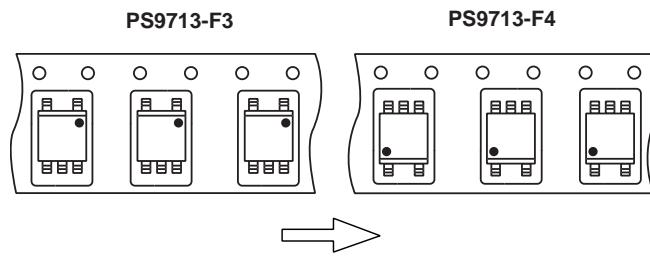
TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)

TAPING SPECIFICATIONS (Units in mm)



Packing : 3500 pcs/reel F3, F4

TAPE DIRECTION

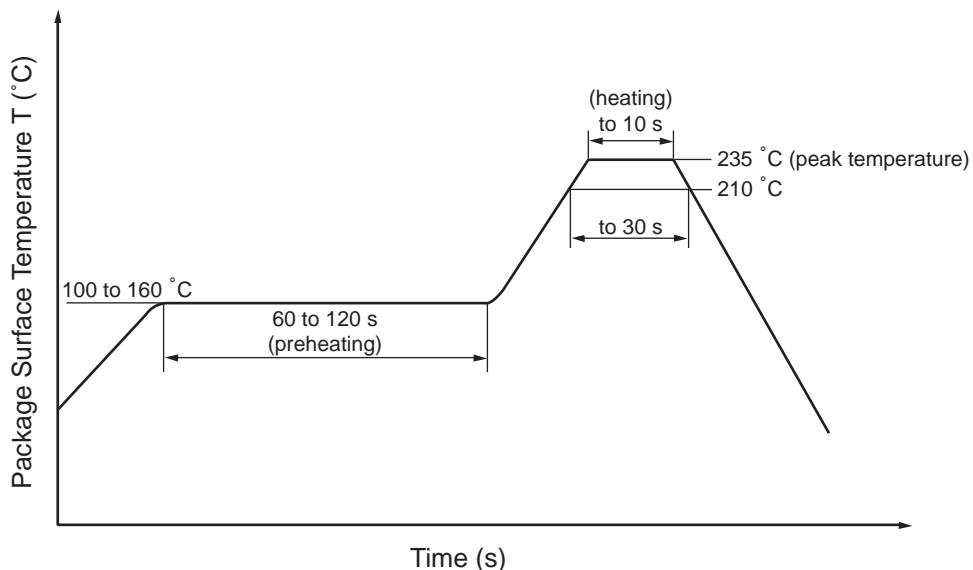


RECOMMENDED SOLDERING CONDITIONS

(1) Infrared reflow soldering

- Peak reflow temperature 235 °C (package surface temperature)
- Time of temperature higher than 210 °C 30 seconds or less
- Number of reflows Three
- Flux Rosin flux containing small amount of chlorine (The flux with a max. chlorine content of 0.2 Wt % is recommended)

Recommended Temperature Profile of Infrared Reflow



(2) Dip soldering

- Temperature 260 °C or below (molten solder temperature)
- Time 10 seconds or less
- Number of times One (Allowed to be dipped in solder including plastic mold portion.)
- Flux Rosin flux containing small amount of chlorine (The flux with a max. chlorine content of 0.2 Wt % is recommended.)

(3) Cautions

- Fluxes Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.