


Distribution Unit with 1 IEC Appliance Connector C14 or Power Cord and 4 IEC Appliance Plugs F



4740.6X00

4740.3X00



Description

- Stand alone module
- 2 - 4 Functions:
Inlet Protection class I, Outlet shuttered Protection class I, Line switch, Fuseholder with neon indicator

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2.5 kVAC between L-N
	> 2.5 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Material: Housing	Thermoplastic, black, UL 94V-0



Appliance-Inlet/-Outlet	C14 acc. to IEC/EN 60320-1, F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
Fuseholder	1 pole, acc. to IEC 60127-6, for fuse-links 5 x 20mm
Power Acceptance @ Ta > 23°C	Admissible power acceptance at higher ambient temperature see derating curves
Line Switch	Rocker switch, illuminated, acc. to IEC 61058-1 Technical details

Dimensions

Length 225 mm

Stripbloc 4740.3X00




Stripbloc 4740.4X00

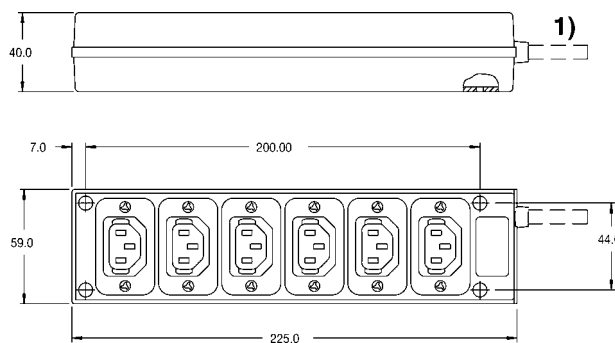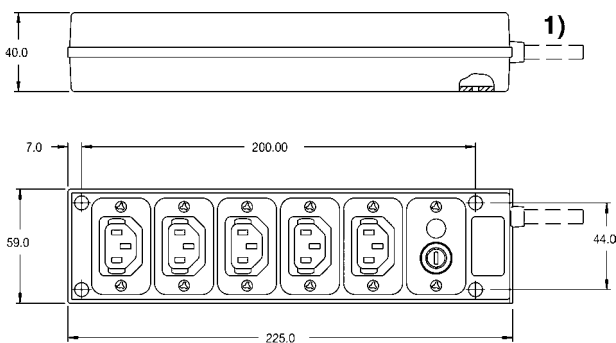

1) Version with plug and cable, see variants
Mounting Øs for 3 mm screws

1) Version with plug and cable, see variants
Mounting Øs for 3 mm screws

Stripbloc 4740.6X00

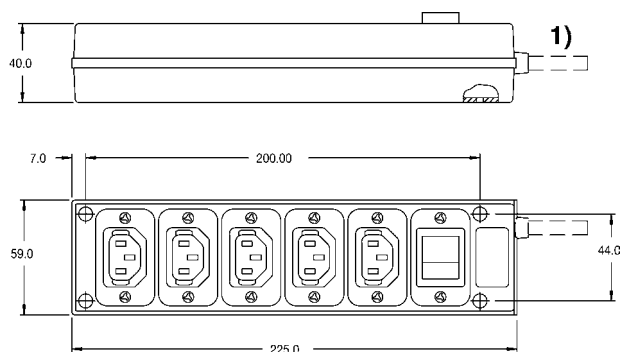Shutter operation:
shutters opened by plug insertionShutter operation:
shutters closed when plug is removed

1) Version with plug and cable, see variants
Mounting \varnothing s for 3 mm screws

Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Appliance outlet	Fuseholder	Line Switch	Neon indication	Terminal	cable	Order Number
6	-	-	●	-	inlet	4740.4000
6	-	-	●	Continental Europe CEE7/VII (Schuko), 10A	2 m cable	4740.4600
6	-	-	●	United Kindom BS 1363 A, 10A	2 m cable	4740.4300
5	-	2-pole	●	-	inlet	4740.6000
5	-	2-pole	●	Continental Europe CEE7/VII (Schuko), 10A	2 m cable	4740.6600
5	-	2-pole	●	United Kindom BS 1363 A, 10A	2 m cable	4740.6300
5	1 pole	-	●	-	inlet	4740.3000
5	1 pole	-	●	Continental Europe CEE7/VII (Schuko), 10A	2 m cable	4740.3600
5	1 pole	-	●	United Kindom BS 1363 A, 10A	2 m cable	4740.3300

1) SP 5 x 20; 10 A / 250VAC, quick acting F, part No. 0001.1014

2) SP 5 x 20; 6.3 A / 250VAC, quick acting F, part No. 0001.1012

3) cable acc. countryspecific standards

Packaging unit 10 Pcs