


## RS-1215-HG

- ▶ Designed for standard 19-inch racks (1U high)
- ▶ 12 outlets (6 front / 6 rear)
- ▶ Hospital-grade plug and outlets
- ▶ 15-ft. cord
- ▶ 15A resettable circuit breaker
- ▶ Illuminated On/Off switch with locking safety cover

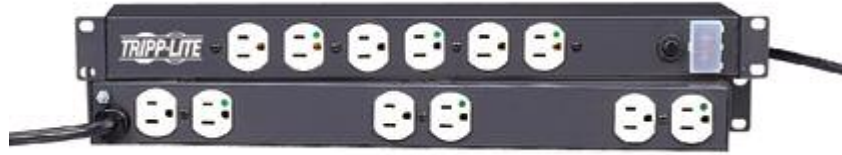

## DESCRIPTION

Tripp Lite's RS-1215-HG all-metal Power Strip offers 15-amp capacity AC power distribution in a versatile multi-mount cabinet. Detachable mounting flanges are configurable for rackmount, wallmount and under-counter installation. Uses only 1 rack space (1U) when installed in any 19-inch rack meeting EIA standards. Unfiltered electrical pass-through makes the RS-1215-HG ideal for distributing alternate waveform UPS or generator power in rack enclosures, network closets and more. Features Hospital Grade plug and outlets. Includes 12 outlets (6 front / 6 rear), 15-foot AC power cord and lighted switch with cover to prevent accidental turn-off.

**PLUG / OUTLETS:** Incorporates NEMA 5-15PHG Hospital-Grade Plug and 12 NEMA5-15RHG (6 front & 6 rear) Hospital Grade Receptacles

**ELECTRICAL:** 120V AC, 50/60Hz, 15A

**FORMAT:** 19-in. rackmount (uses 1 rack space / 1U)

## KEY BUYING POINTS

- Versatile all-metal cabinet with detachable mounting flanges allows rackmount, wallmount, undercounter and other creative mounting options
- Unfiltered electrical pass-through reliably distributes alternate waveform AC power from UPS or generator to supported equipment
- Uses one rack space (1U) in standard 19-inch rack ("zero U" mounting possible in many racks)
- 12 Hospital-Grade NEMA5-15RHG output receptacles (6 front / 6 rear, each pair with green-dot hospital-grade designation)
- 15-ft., 14-gauge AC cord with high-impact resistant NEMA5-15PHG plug connection
- Lighted power switch (with safety cover) confirms power on/off status
- Snap-in switch guard prevents accidental turn-off
- 15A electrical capacity with resettable circuit breaker
- 120V AC, 50/60Hz electrical compatibility

## TYPICAL APPLICATIONS

- AC power distribution with hospital-grade receptacles and plug where durability and reliability are required. Not for use where NEC requires hospital-grade receptacles.

## PACKAGE INCLUDES

- RS-1215-HG
- Instruction manual with warranty information

## COMPLETE SPECIFICATIONS

<b>SYSTEM OVERVIEW</b>	
<b>System overview:</b>	1U rackmount, wallmount or under-counter installable power strip with front- and rear-facing hospital-grade outlets
<b>Voltage compatibility:</b>	120VAC
<b>Frequency compatibility:</b>	50/60Hz
<b>OUTPUT</b>	
<b>Output volt amp capacity (amps):</b>	15A
<b>Outlet quantity / type:</b>	12 NEMA5-15RHG
<b>Outlet orientation:</b>	6 front facing / 6 rear facing
<b>INPUT</b>	
<b>Input connection type:</b>	NEMA 5-15PHG input plug
<b>Input cord length (ft.):</b>	15
<b>Input cord length (m):</b>	4.572
<b>Recommended electrical service:</b>	15A 120V
<b>LEDS ALARMS &amp; SWITCHES</b>	
<b>Switches:</b>	Red illuminated 2 position switch controls power to all outlets
<b>Locking switch cover:</b>	Transparent locking switch cover prevents accidental shutoff
<b>PHYSICAL</b>	
<b>Unit Dimensions (HWD/in):</b>	3.5 x 17.3 x 1.7
<b>Unit Dimensions (HWD/cm):</b>	8.9 x 43.9 x 4.3
<b>Material of construction:</b>	Sheet metal
<b>Form factors supported:</b>	1U rackmount, wallmount and undercounter installation supported
<b>Housing color:</b>	Black
<b>Receptacle color:</b>	White
<b>AC line cord color:</b>	Black
<b>CERTIFICATIONS</b>	
<b>UL1363 (Power Tap):</b>	UL1363 (UR status) (Series Number: AGIP120V6IPRM)
<b>cUL / CSA (Canada):</b>	cUL (Series Number: AGIP120V6IPRM)
<b>WARRANTY</b>	
<b>Product warranty:</b>	Lifetime
<b>SPECIAL FEATURES</b>	
<b>TVSS grounding:</b>	Back panel nut and bolt grounding lug

*The policy of Tripp Lite is one of continuous improvement.  
Specifications are subject to change without notice.  
Therefore, your product may vary slightly from what is currently listed.*



**Tripp Lite World Headquarters**  
1111 W. 35th Street  
Chicago, IL 60609 USA

**Customer Support**  
(773) 869-1234

© 2005 Tripp Lite. All Rights Reserved.