

All information is subject to change without notice. Please read bottom notes.


RoHS compatible

- FEATURES :** (1) 5.7" QVGA color display  
 (2) Wide Viewing Angle (Vertical: 120 degrees, Horizontal: 140 degrees)  
 (3) LED B/L  
 (4) Replaceable structure of LED unit  
 (5) AR surface coating

TENTATIVE

Specification

Display size	5.7 type(14.0cm)
Number of Pixels	320 (W) X 240 (H) (QVGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.36 (W) X 0.36 (H)
Luminance (typ.)	400 cd/m <sup>2</sup>
Response Time (max.)	T <sub>ON</sub> = 50 ms, T <sub>OFF</sub> = 50 ms
Contrast (typ.)	500
Viewing Angle (CR≥10)	Vertical : 120 degrees, Horizontal : 140 degrees
I/F Format & Supply voltage	CMOS RGB 6bit, H/V sync+DE, V <sub>DD</sub> =3.3V
Operating Temperature	-20 to 70 degrees C.
Outline dimension (mm)	144.0 (W) X 104.6 (H) X 7.8 (D) mm
Weight (approximately)	125 g
Backlight	LED
Power Consumption	1.36 W

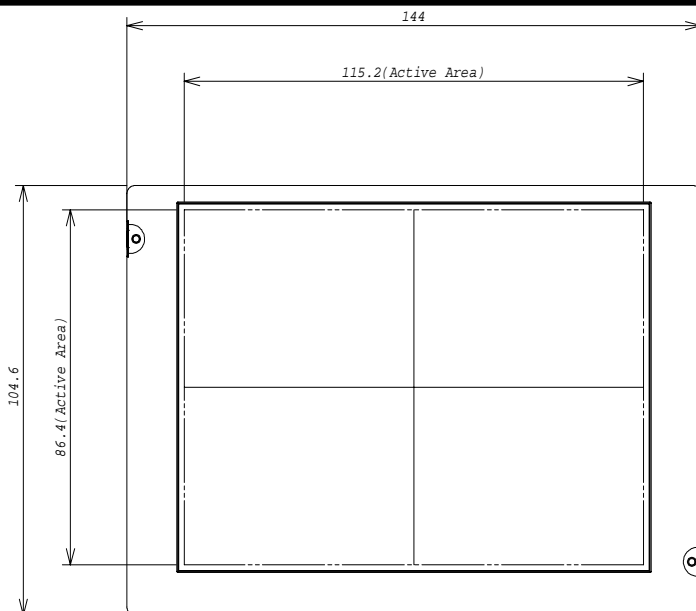

Rev.0.3R (2008/03/31)

\*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

\*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.