

**All information is subject to change without notice. Please read bottom notes.**


- FEATURES :** (1) 8.4" VGA color display  
 (2) Built in Long Life Lamps(MTTF:50,000 h)  
 (3) Replaceable structure of lamp unit  
 (4) 12 o'clock main viewing angle direction

**RoHS compatible**

**TENTATIVE**

**Specification**

Display size	8.4type(21cm)
Number of Pixels	640(W) X 480(H) (VGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.267(W) X 0.267(H)
Luminance (typ.)	300 cd/m <sup>2</sup> at I <sub>FL</sub> =6.0mA(rms)
Response Time (max.)	T <sub>ON</sub> =15ms, T <sub>OFF</sub> =25ms
Contrast	250
Viewing Angle (CR≥10)	Vertical : 95 degrees, Horizontal : 110 degrees
I/F Format & Supply voltage	CMOS RGB 6bit, DE only, V <sub>DD</sub> =5.0V
Operating Temperature	-10 to 70 degrees C.
Outline dimension (mm)	221.0(W) X 152.4(H) X 12.0(D) (typ.) mm
Weight (approximately)	440g
Backlight	Sidelight (1 CCFL)
Power Consumption	4.0W (Except the efficiency FL inverter)

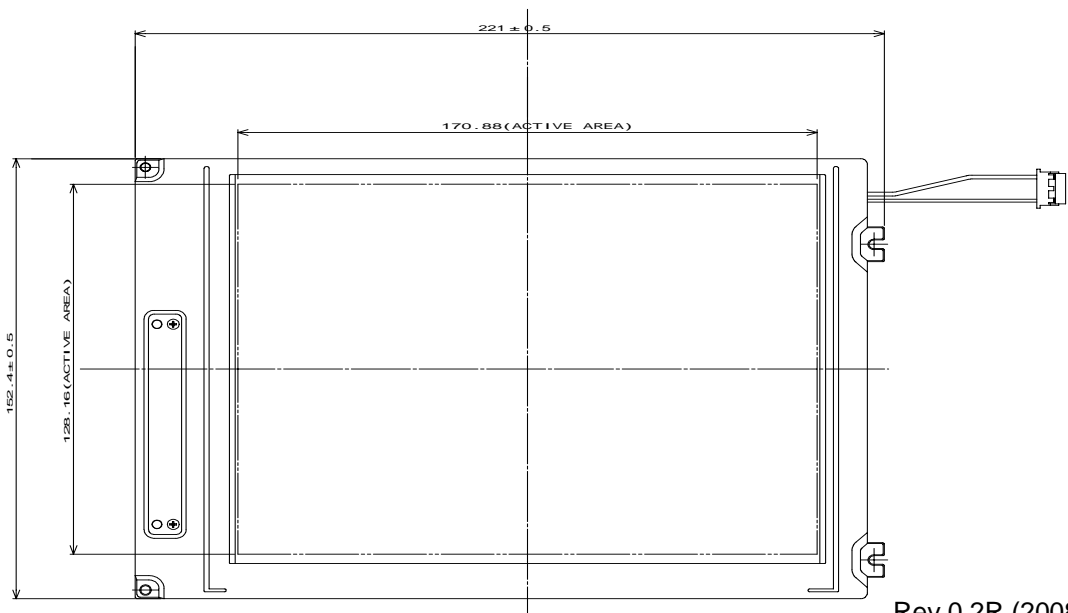

Rev.0.2R (2008/4/17)

\*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.  
 \*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.