



UNCONTROLLED DOCUMENT

P/N PREFIX/SUFFIX TABLE			
LCM-X	GXX/C	DESCRIPTION	
STANDARD	S	SR/C	STN, REFLECTIVE
HIGH TEMP.	H	WF/C-C	FSTN, TRANSFLECTIVE(W/CCFL BACKLIGHT)

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

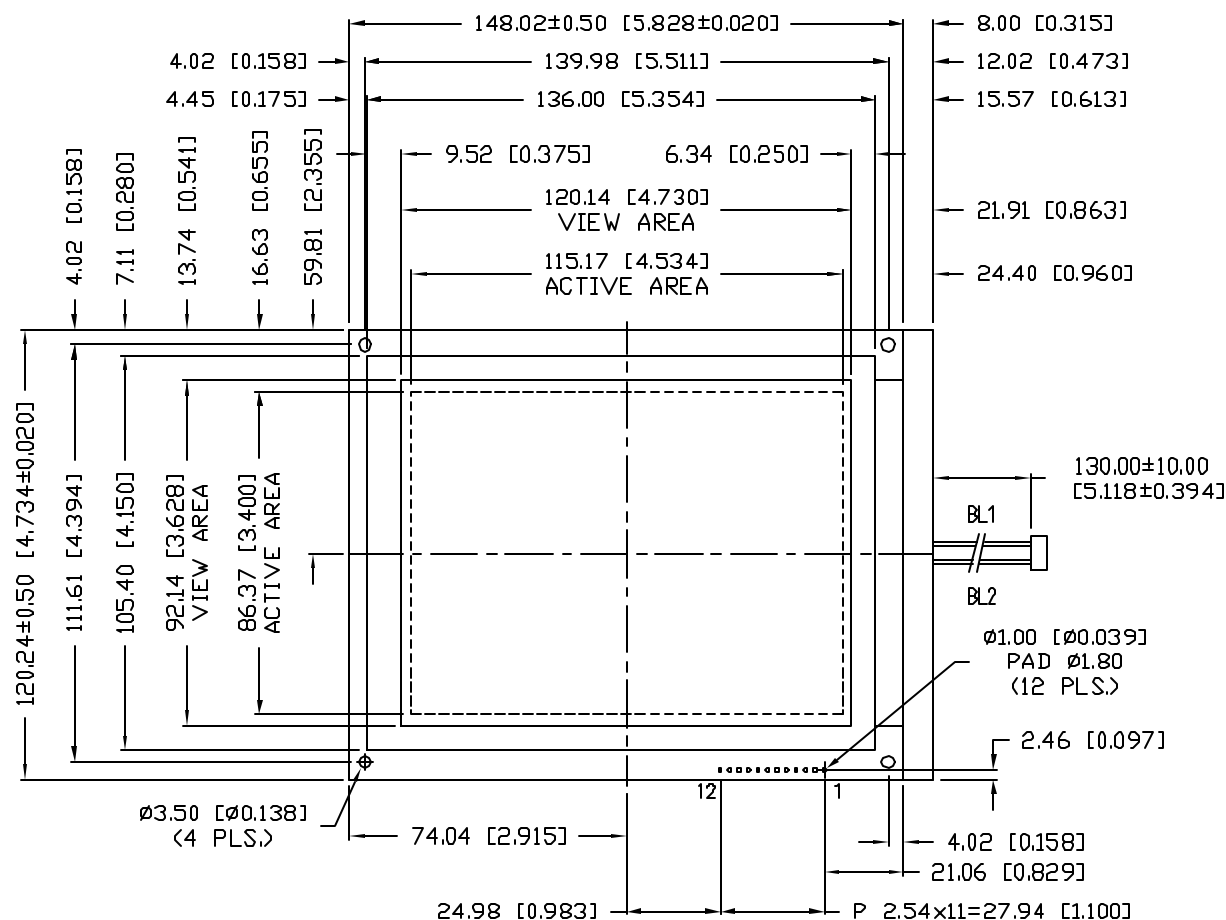


PART NUMBER		REV.
LCM-X320240GXX/C(-X)		
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE

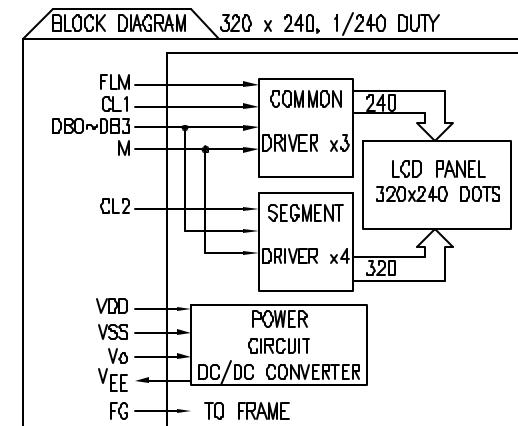

TYPE	DIM.	A	B
WITH BACKLIGHT		20.5	10.5
NO BACKLIGHT		10.2	5.2

PIXEL DETAIL

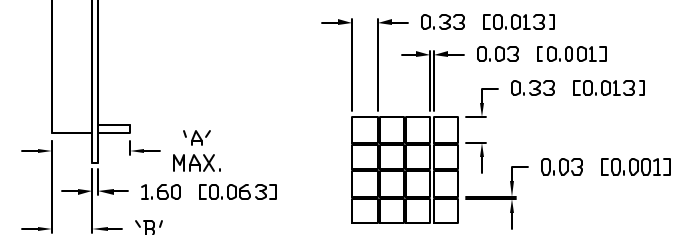

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm 0.25\text{mm}$ ($\pm 0.010"$)

REV.	PART NUMBER
	LCM-X320240GXX/C(-X)

320 x 240 DOT MATRIX GRAPHIC MODULE, 1/4 VGA,
WITH NEGATIVE CHARGE PUMP, 1/64 DUTY, MONOCHROME.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
INCORPORATED


290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
SA/DU			3-31-99
			PAGE: 1 OF 2
			SCALE: N/A

PIN CONFIGURATION

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	V _{SS}	-	GND
2	V _{DD}	-	POWER SUPPLY FOR LOGIC CIRCUIT
3	V _o	-	LCD CONTRAST VOLTAGE
4	FLM	H/L	THE FLM SIGNAL INDICATES THE BEGINNING OF EACH DISPLAY CYCLE.
5	CL1	H->L	DATA LATCH PULSE
6	CL2	H->L	DATA SHIFT CLOCK PULSE
7	M	H/L	CONTROL SIGNAL FOR AC DRIVING
8~11	DO~D3	H/L	DATA BUS
12	V _{EE}	-	POWER SUPPLY FOR LCD DRIVING CIRCUIT

V_{DD}-V_o: LCD DRIVING VOLTAGE
VR: 10K Ω -20K Ω




ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	STANDARD VALUE			UNIT
			MIN.	TYP.	MAX.	
SUPPLY VOLTAGE FOR LOGIC	V _{DD} -V _{SS}	-	4.5	5.0	5.5	V
SUPPLY CURRENT FOR LOGIC	I _{DD}	NOTE 1	-	16.0	-	mA
SUPPLY VOLTAGE FOR LCD DRIVER	V _{DD} -V _o	V _{DD} =5V	22.4	23.5	24.3	V
SUPPLY CURRENT FOR LCD	I _{EE}	NOTE 1	-	5.0	-	mA
INPUT VOLTAGE*	HIGH	V _{IH}	-	2.2	-	V _{DD} V
	LOW	V _{IL}	-	-	0.6	V
OUTPUT VOLTAGE*	HIGH	V _{OH}	-	2.4	-	V
	LOW	V _{OL}	-	-	0.4	V
CCFL DRIVING VOLTAGE	V _{CCFL}	Ta=25°C	-	300	-	V _{rms}
CCFL FREQUENCY	f _{CCFL}	-	-	70	85	KHz
CCFL CURRENT	I _{CCFL}	Ta=25°C	4	5	6	mA
CCFL STARTING DISCHARGE VOLTS	-	Ta=5°C	1000	-	-	V
BRIGHTNESS	-	SURFACE AREA	-	80	-	cd/m ²
CCFL OPERATING LIFETIME	-	Ta=25°C	-	10K	-	HOURS

NOTE 1: V_{DD}-V_{SS}=5.0V
V_{DD}-V_o=23.0V

*APPLIED TO TERMINALS FLM, CL1, CL2, DO~D3.

INTERFACE SIGNALS

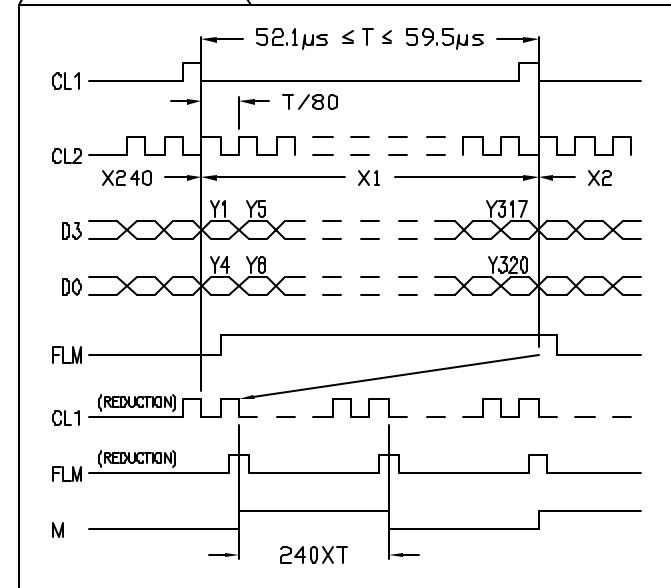

ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	TEST CONDITION	STANDARD VALUE		UNIT
SUPPLY VOLTAGE FOR LOGIC	V _{DD} -V _{SS}	Ta=25°C	-	6.0	V
SUPPLY VOLTAGE FOR LCD DRIVE	V _{DD} -V _o	Ta=25°C	-	27.0	V
INPUT VOLTAGE	V _I	Ta=25°C	V _{SS}	V _{DD}	V
OPERATING TEMPERATURE	T _{opr}	LCM-S	0	50	°C
		LCM-H	-20	70	°C
STORAGE TEMPERATURE	T _{stg}	LCM-S	-20	70	°C
		LCM-H	-30	85	°C

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
INCORPORATED

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 3-31-99

SA/DU

PAGE: 2 OF 2

SCALE: N/A