

**FEATURES**

- \* 0.56 inch (14.22 mm) DIGIT HEIGHT
- \* CONTINUOUS UNIFORM SEGMENTS
- \* LOW POWER REQUIREMENT
- \* EXCELLENT CHARACTERS APPEARANCE
- \* HIGH BRIGHTNESS & HIGH CONTRAST
- \* WIDE VIEWING ANGLE
- \* SOLID STATE RELIABILITY
- \* CATEGORIZED FOR LUMINOUS INTENSITY


**DESCRIPTION**

The LTD-5523AB is a 0.56 inch (14.22 mm) digit height dual digit seven-segment display. The device utilizes blue chips, which are made from GaN on a SiC substrate, and has a gray face and white segments.

**DEVICE**


| <b>PART NO</b> | <b>DESCRIPTION</b> |
|----------------|--------------------|
| BLUE           | COMMON CATHODE     |
| LTD-5523AB     | RT. HAND DECIMAL   |

**PACKAGE DIMENSIONS**

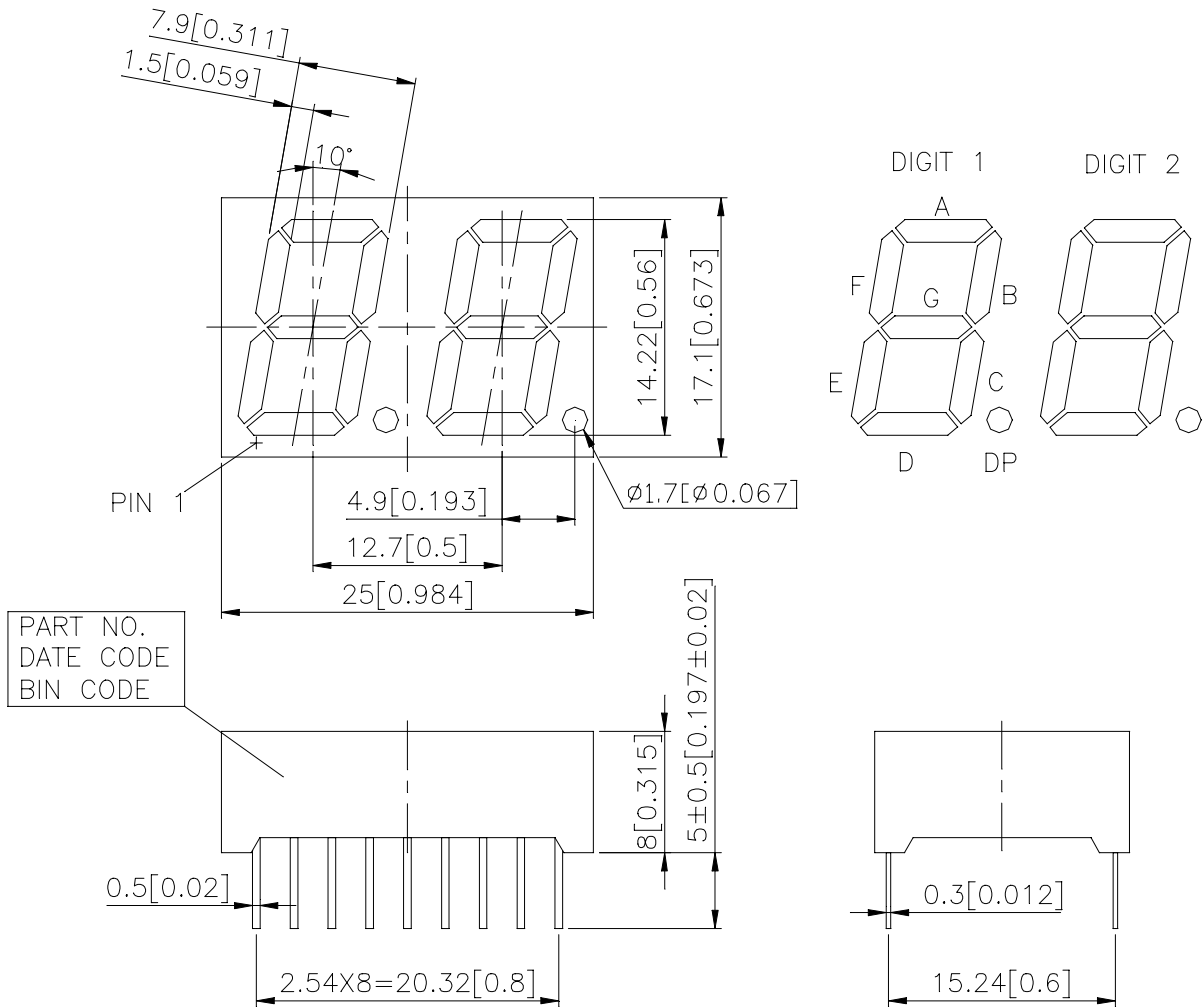

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

**INTERNAL CIRCUIT DIAGRAM**

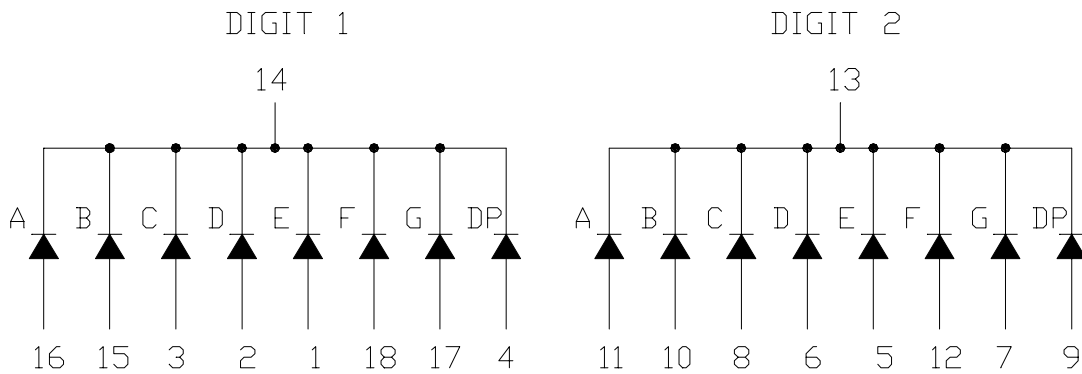

**PIN CONNECTION**

| <b>No.</b> | <b>CONNECTION</b>        |
|------------|--------------------------|
| 1          | ANODE E (DIGIT 1)        |
| 2          | ANODE D (DIGIT 1)        |
| 3          | ANODE C (DIGIT 1)        |
| 4          | ANODE DP (DIGIT 1)       |
| 5          | ANODE E (DIGIT 2)        |
| 6          | ANODE D (DIGIT 2)        |
| 7          | ANODE G (DIGIT 2)        |
| 8          | ANODE C (DIGIT 2)        |
| 9          | ANODE DP (DIGIT 2)       |
| 10         | ANODE B (DIGIT 2)        |
| 11         | ANODE A (DIGIT 2)        |
| 12         | ANODE F (DIGIT 2)        |
| 13         | COMMON CATHODE (DIGIT 2) |
| 14         | COMMON CATHODE (DIGIT 1) |
| 15         | ANODE B (DIGIT 1)        |
| 16         | ANODE A (DIGIT 1)        |
| 17         | ANODE G (DIGIT 1)        |
| 18         | ANODE F (DIGIT 1)        |

**ABSOLUTE MAXIMUM RATING AT Ta=25°C**

| PARAMETER  | MAXIMUM RATING                           | UNIT               |
|--|--|--------------------|
| Power Dissipation Per Segment  | 95                                       | mW                 |
| Peak Forward Current Per Segment<br>( 1/10 Duty Cycle, 0.1ms Pulse Width )           | 60                                       | mA                 |
| Continuous Forward Current Per Segment   | 25                                       | mA                 |
| Derating Linear From 25 <sup>0</sup> C Per Segment                                   | 0.33                                     | mA/ <sup>0</sup> C |
| Reverse Voltage Per Segment  | 5  | V                  |
| Operating Temperature Range  | -35 <sup>0</sup> C to +85 <sup>0</sup> C |                    |
| Storage Temperature Range  | -35 <sup>0</sup> C to +85 <sup>0</sup> C |                    |
| Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260 <sup>0</sup> C |  |                    |

**ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C**

| PARAMETER                         | SYMBOL            | MIN. | TYP. | MAX. | UNIT | TEST CONDITION       |
|-----------------------------------|-------------------|------|------|------|------|----------------------|
| Average Luminous Intensity        | I <sub>v</sub>    | 1300 | 4300 |      | μcd  | I <sub>F</sub> =10mA |
| Peak Emission Wavelength          | λ <sub>p</sub>    |      | 428  |      | nm   | I <sub>F</sub> =20mA |
| Spectral Line Half-Width          | Δλ                |      | 65   |      | nm   | I <sub>F</sub> =20mA |
| Dominant Wavelength               | λ <sub>d</sub>    |      | 466  |      | nm   | I <sub>F</sub> =20mA |
| Forward Voltage Per Segment       | V <sub>F</sub>    |      | 3.8  | 4.5  | V    | I <sub>F</sub> =20mA |
| Reverse Current Per Segment       | I <sub>R</sub>    |      |      | 100  | μA   | V <sub>R</sub> =5V   |
| Luminous Intensity Matching Ratio | I <sub>v</sub> -m |      |      | 2:1  |      | I <sub>F</sub> =10mA |

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

**TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES**

(25°C Ambient Temperature Unless Otherwise Noted)

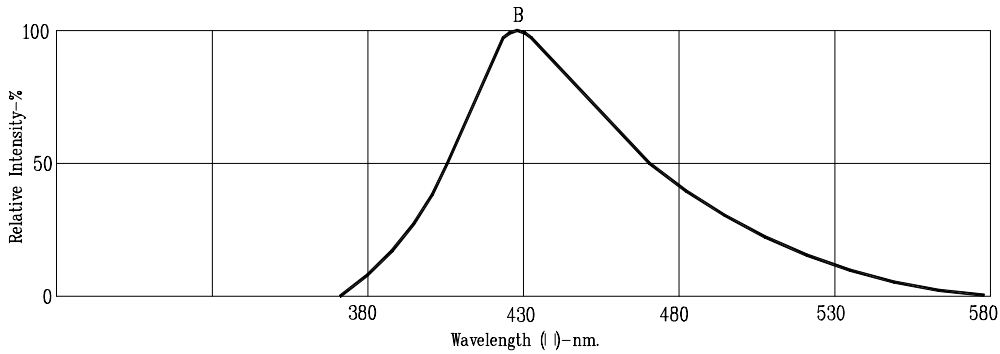


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. RELATIVE LUMINOUS EFFICIENCY VS. PEAK FORWARD CURRENT (250us pulse width; 2ms period)




Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE

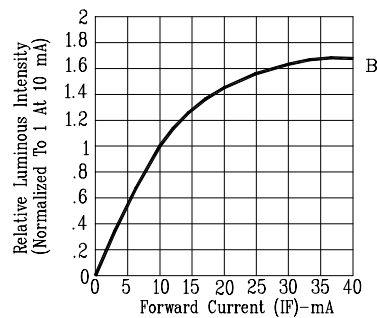


Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig5. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE.

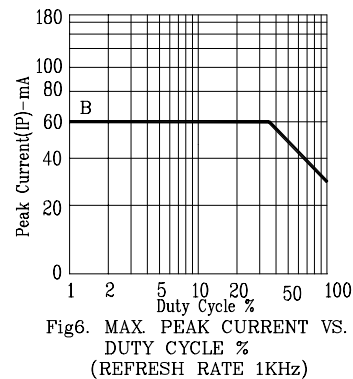


Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)