


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE IN CAD	2/7/03

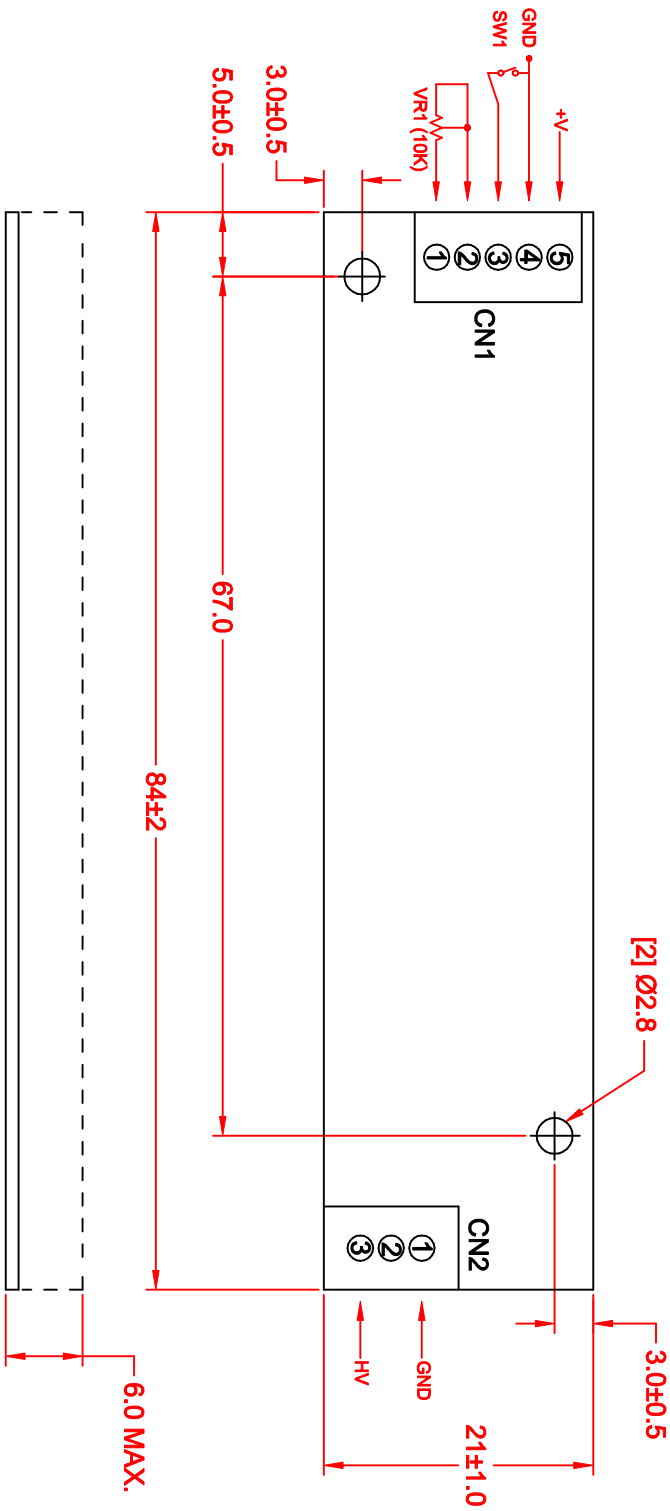

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1	BXC-10546
	2	
	3	
	4	
	5	
CN2	1	BXC-10643
	2	
	3	
	4	
	5	

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	8.0	12.0	16.0
INPUT CURRENT: (mA)	200	230	260
OUTPUT VOLTAGE: (Vrms)	900	1000	—
OUTPUT CURRENT: 2 X (mA)	5.5	6.0	7.0
OUTPUT FREQUENCY: (KHz)	27	37	47
DIMMING RANGE (%)	40	—	100
OPERATING TEMP: (CELSIUS)	0	25	60

METRIC	DIMENSIONS ARE IN MILLIMETERS
	TOLERANCE UNLESS OTHERWISE SPECIFIED
	1 PL +/- 0.3
	2 PL +/- 0
	ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE: **DIMMING CCFL INVERTER**

DRAWN BY: L. WENGSTROM	APPROV'D BY: F.D.	DATE: 2/7/03	SIZE: A	FSCH NO.: 55335	DRAWING NO.: BXA-12564-6M	RELEASED DATE: 2/7/03	REVISION DATE:	REV. NO.:	SHEET OF:
- CAD DRAWING -									
MANUAL REVISIONS NOT PERMITTED									

NOTE:
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10546 AND BXC-10643 CAN BE ORDERED SEPARATELY.