
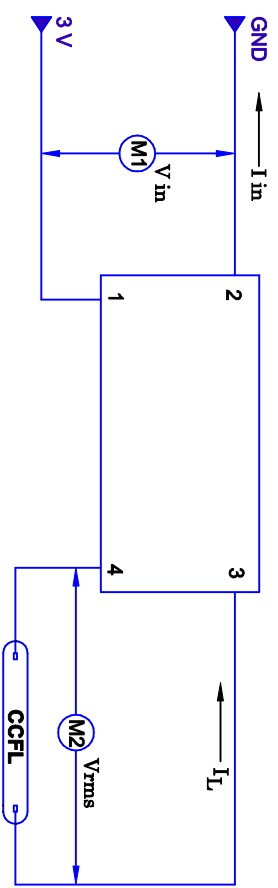
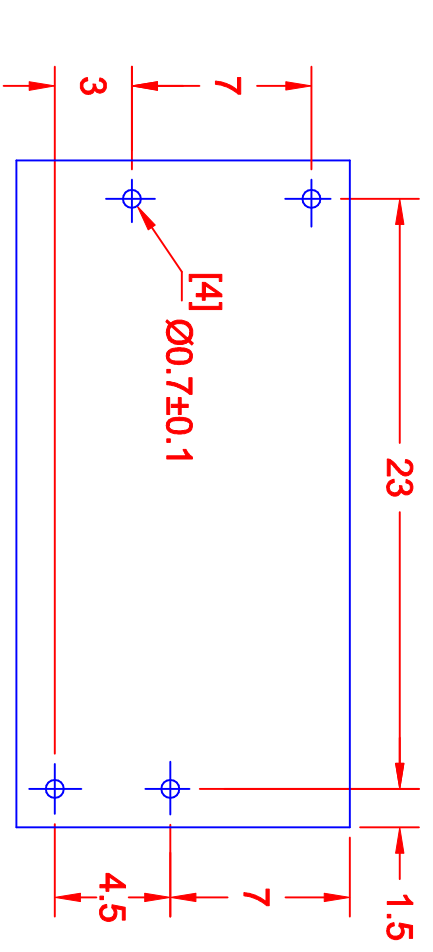


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	8/20/99
A	WIRE DIAGRAM CHNGS	10/31/00
B	CONVERT TO CAD	6/8/01
C	ADD HOLE DIA.	3/15/02

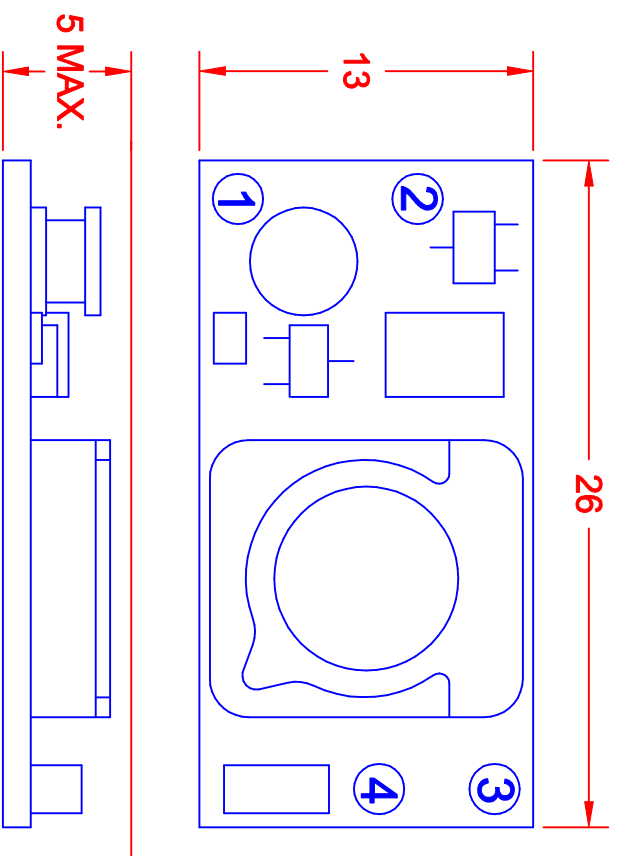

CHARACTERISTICS			
	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	2.5	3.0	3.5
INPUT CURRENT: (mA)	350	400	450
OUTPUT VOLTAGE: (Vrms)	600	650	700
OUTPUT CURRENT (maRms)	4.0	4.5	5.0
OUTPUT FREQUENCY: (kHz)	70	80	90
OPERATING TEMP: (CELSIUS)	0	25	50

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)
3	OUT GND
4	V OUT

TOLERANCE		
L < 20	20 ≤ L < 50	50 ≤ L < 100
±0.2	±0.3	±0.4
		100 ≤ L
		±0.5

<b>METRIC</b> THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0.2 ANGLE +/- 0	
DRAWN BY <b>L. WENGSTROM</b>	APP'D BY F.D.	DATE <b>3/15/02</b>	TITLE <b>3 V CCFL POWER SUPPLY</b>
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED	SCALE <b>A</b>	NONE	<b>JKL COMPONENTS CORPORATION</b>
FSCM NO. <b>55335</b>	DRAWING NO. <b>BXA-302</b>	RELEASED DATE <b>8/20/99</b>	REVISION DATE <b>3/15/02</b>
	REV. NO. <b>C</b>	SHEET OF	