


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL	8/14/01
	P-9808-12	
A	CONVERTED TO CAD	3/4/03

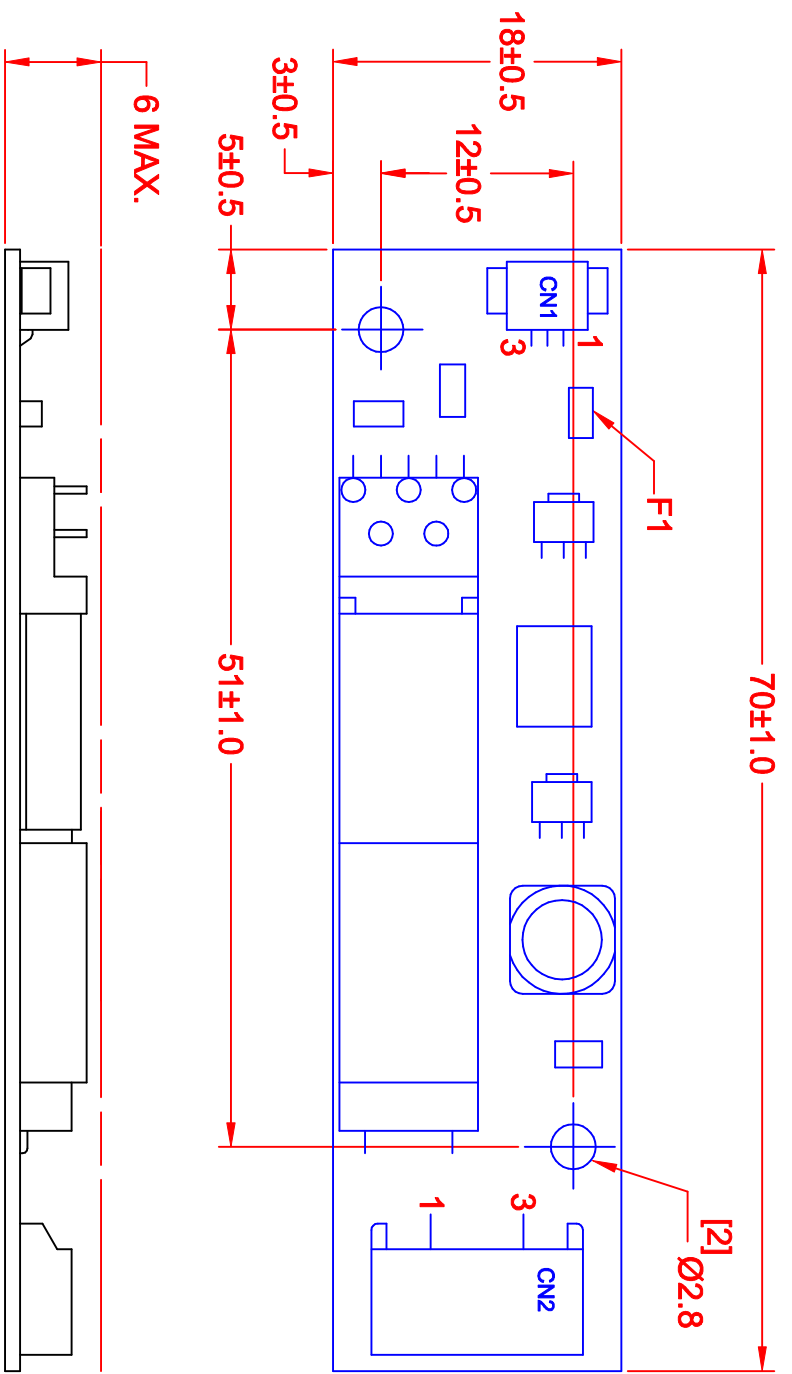

JKL PART NUMBER: BXA-12617C-6M

NO.	PIN NUMBER	MATING WIRE HARNESS
CN1	1 INPUT VOLTAGE (+V) 2 L-ON (INHIBIT / PWM) 3 INPUT VOLTAGE (GND)	BXC-10580
CN2	1 HIGH VOLTAGE OUT 2 N/C 3 LAMP GROUND	BXC-10643

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT @ 12V: (mA)	---	380	580
INPUT WATTS	---	4.6	7.0
OPEN CIRCUIT VOLTS (Vrms)	---	1200	---
LAMP CURRENT (mamps)	5.5	6.2	7.5
FREQUENCY (KHz)	50	60	70
PWM FREQUENCY (TYP.) (KHz)	0.1	0.5	---
OPERATING TEMP.: (CELSIUS)	15	---	---
STORAGE TEMP.: (CELSIUS)	0	---	50
	-20	25	70

NOTE:
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10580 AND BXC-10643 CAN BE ORDERED SEPARATELY.

METRIC	DIMENSIONS ARE IN MILLIMETERS	JKL COMPONENTS CORPORATION	
	TOLERANCE UNLESS OTHERWISE SPECIFIED	12 VOLT DC INPUT INVERTER	
1 PL +/- 0.3	2 PL +/- 0	SIZE	FSQM NO.
3 ANGLE +/- 0		A	55335
DRAWN BY	DATE	SCALE	DRAWING NO.
L. WENGSTROM	3/4/03	NONE	BXA-12617C-6M
- CAD DRAWING -		RELEASED DATE	REVISION DATE
MANUAL REVISIONS NOT PERMITTED		8/14/01	3/4/03
		REV. NO.	SHEET
		A	1 OF 1