


5894S Series Panel Mounted LED Indicator Light
DESCRIPTION AND FEATURES

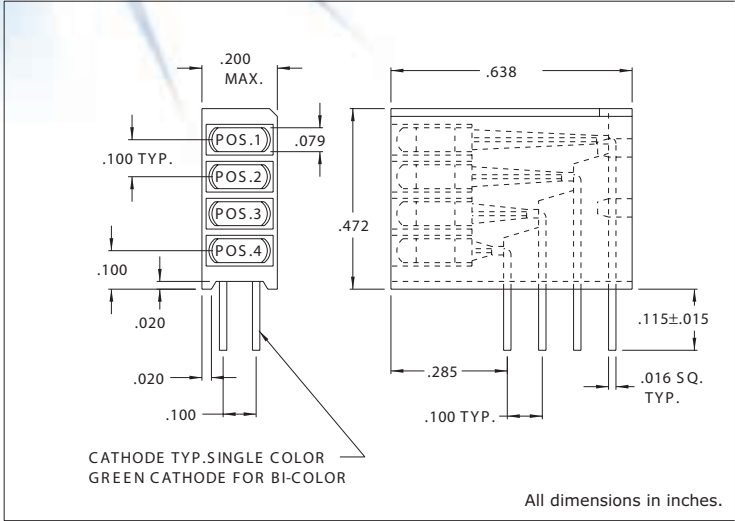

- Features**
- 4 LEDs stack mounted in single block saves space and assembly time.
 - Super Brite light output
 - Standoffs prevent flux entrapment.
 - Black plastic mounting block for high contrast ratio.
 - Meets UL 94V-0 and Bellcore flammability specifications.
 - Assembly can also be supplied in various color combinations. Call factory for details.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

| Part Number | Emitted Color | Typical Intensity (mcd) | Rated Current (mA) | Continuous Forward Current Max. (mA) | Forward Voltage | | Reverse Breakdown Voltage Min. (V) | Peak Wavelength (nm) | Peak Forward Current @ 1ms-300 PPS (A) |
|---------------|---------------|-------------------------|--------------------|--------------------------------------|-----------------|----------|------------------------------------|----------------------|--|
| | | | | | Typ. (V) | Max. (V) | | | |
| 5894S 1;1;1;1 | Red | 10 | 10 | 30 | 2.2 | 3.0 | 5 | 650 | - |
| 5894S 5;5;5;5 | Green | 16 | 10 | 30 | 2.3 | 3.0 | 5 | 562 | - |
| 5894S 7;7;7;7 | Yellow | 6.3 | 10 | 30 | 2.2 | 3.0 | 5 | 585 | - |